


# Technical Data Sheet

Last data update


3/15/2016

9010  
novantadieci®

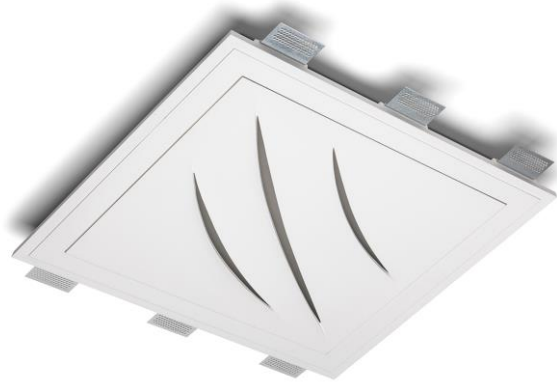

*Req. space behind the plasterboard*

70mm




*hole on the plasterboard*

480x480mm




*External measures*

475x475mm



*Measures of the light output*

325x355mm



*Height without electrical part*

65mm



*Height including the electrical part*

65mm

## Notes on measures

## General notes

## INCASSO A PLAFONE

8917-3005

Recessed lighting / CRISTALY

Surface finish : CRISTALY

LED 28.5W / 24Vdc / 2550lm / 3000°K / CRI85

### Model

Code	8917
Product family	INCASSO A PLAFONE
Type	Recessed lighting

### Material/Surface finish

Code	004
Material	CRISTALY
Surface finish	CRISTALY

### Electrical part

Code	3005
Type	LED
Power	28.5W
Tension	24Vdc
Light Output	2550lm
Colour Temperature	3000°K
CRI	85
Light Output of the lamp	510lm
Dimmable	SI
Power Supply	by Remote Power Supply
Connection	Screw Terminal
Cover	Satin Polycarbonate

### General Data

Protection Index	IP20
Isolation Class	III
Weight [Kg]	6,2
Country of production	MADE IN ITALY
Mounting instruction	025.378_9010_REV04

### Installation

Multisize system	SI
Position	Ceiling


### Packaging

Type	White american Box
Measures AxBxH	610x610x240mm
Gross Weight [Kg]	8,0307
Master carton	NO
Quantity of articles	
Measures AxBxH	

## Technical Data Sheet

8917-3005

### Fotometric Data

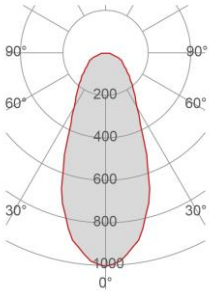


<i>Electrical part</i>	3005_28,5
<i>Power</i>	28.5W
<i>Light Output</i>	2550lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	20%
<i>Light Output of the lamp</i>	510lm
<i>Beam Angle</i>	45°
<i>Beam Inclination</i>	0°


<i>Illuminance</i>	<i>1m</i>	513lux
	<i>2m</i>	128lux
	<i>3m</i>	57lux
	<i>4m</i>	32lux
	<i>5m</i>	21lux

### Accessories


#### Standard Power Supply




<i>Code</i>	026.259
<i>Measures</i>	167x45x30mm
<i>Power</i>	36W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc



<i>Code</i>	026.260
<i>Measures</i>	157x54x36mm
<i>Power</i>	60W
<i>Input</i>	220-240V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.261
<i>Measures</i>	219x63x35.5mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc




<i>Code</i>	026.262
<i>Measures</i>	244x71x35.5mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc


#### Dimmable Power Supply



<i>Code</i>	026.209
<i>Measures</i>	125x82x29mm
<i>Power</i>	60W
<i>Input</i>	220-240 V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/1-10V




<i>Code</i>	026.190+026.261
<i>Measures</i>	156x52x24mm
<i>Power</i>	150W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI



<i>Code</i>	026.190+026.262
<i>Measures</i>	156x52x24mm
<i>Power</i>	240W
<i>Input</i>	180-295V~W
<i>Output</i>	24Vdc
<i>Dimmable</i>	PUSH/0-10V/DALI

### Other Accessories



<i>Code</i>	099.142
<i>Description</i>	Emergency Kit
<i>Notes</i>	