



Technical Data Sheet

Last data update


3/15/2016

9010
novantadiecì®

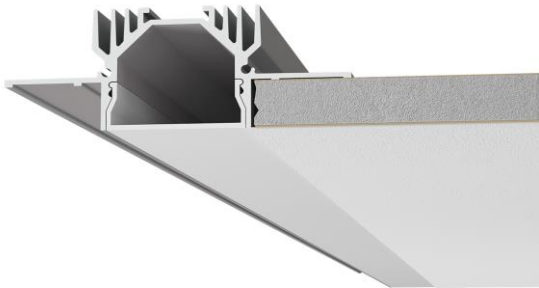


Req. space behind the plasterboard

30mm




hole on the plasterboard

37x1025 ±10mm




External measures

90x1020 ±10mm



Measures of the light output

34x1020 ±10mm



Height without electrical part

35mm

Notes on measures

General notes

PROFILO

P003B-00

Recessed Profile / ALUMITE

Surface finish : ALUMITE

Senza parte elettrica - Without electrical part - / -

Model

Code	P003B
Product family	PROFILO
Type	Recessed Profile

Material/Surface finish

Code	006
Material	ALUMITE
Surface finish	ALUMITE

Electrical part

Code	00
Type	Senza parte elettrica - Without electrical part

General Data

Protection Index	
Isolation Class	
Weight [Kg]	1,1
Cover	Opaline Methacrylate
Country of production	MADE IN ITALY
Mounting instruction	025.481_9010_REV03

Installation

Multisize system	NO
Position	Wall/Ceiling lighting


Packaging

Type	Brown carton tube
Measures AxBxH	90x90x1100mm
Gross Weight [Kg]	1,2827
Master carton	NO
Quantity of articles	
Measures AxBxH	

Technical Data Sheet

P003B-00

Fotometric Data

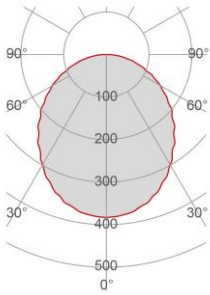

<i>Electrical part</i>	021.792.100
<i>Power</i>	26W
<i>Light Output</i>	3000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	56%
<i>Light Output of the lamp</i>	1680lm
<i>Beam Angle</i>	102°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	<i>1m</i>	<i>643lux</i>
	<i>2m</i>	<i>161lux</i>
	<i>3m</i>	<i>71lux</i>
	<i>4m</i>	<i>40lux</i>
	<i>5m</i>	<i>26lux</i>

Accessories


LED strip



<i>Code</i>	021.790
<i>Power</i>	15W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	1400lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	120




<i>Code</i>	021.791
<i>Power</i>	18W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	2000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224




<i>Code</i>	021.792
<i>Power</i>	26W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	3000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224


Other Accessories




<i>Code</i>	023.700
<i>Description</i>	Linear connection
<i>Notes</i>	




<i>Code</i>	023.701
<i>Description</i>	L connection
<i>Notes</i>	




<i>Code</i>	023.702
<i>Description</i>	T connection
<i>Notes</i>	




<i>Code</i>	023.703
<i>Description</i>	X connection
<i>Notes</i>	




<i>Code</i>	023.704
<i>Description</i>	Wall/Ceiling connection
<i>Notes</i>	



<i>Code</i>	P003.KIT01
<i>Description</i>	Couple of end caps
<i>Notes</i>	



<i>Code</i>	029.012.300
<i>Description</i>	Replacement opal cover
<i>Notes</i>	L 3000mm



<i>Code</i>	TGA
<i>Description</i>	Cut to size
<i>Notes</i>	