



Technical Data Sheet

Last data update


3/15/2016

9010
novantadieci®

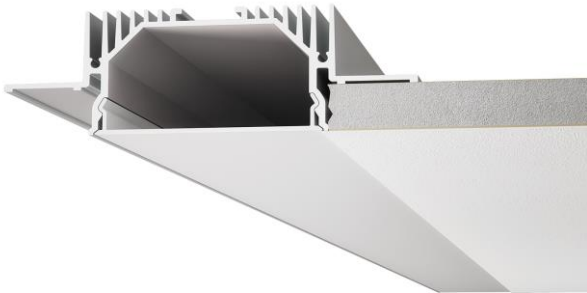

Req. space behind the plasterboard

30mm




hole on the plasterboard

60x1025 ±10mm




External measures

104x1020 ±10mm



Measures of the light output

57x1020 ±10mm



Height without electrical part

35mm

Notes on measures

General notes

PROFILO

P004B-00

Recessed Profile / ALUMITE

Surface finish : ALUMITE

Senza parte elettrica - Without electrical part - / -

Model

| | |
|----------------|------------------|
| Code | P004B |
| Product family | PROFILO |
| Type | Recessed Profile |

Material/Surface finish

| | |
|----------------|---------|
| Code | 006 |
| Material | ALUMITE |
| Surface finish | ALUMITE |

Electrical part

| | |
|------|---|
| Code | 00 |
| Type | Senza parte elettrica - Without electrical part |

General Data

| | |
|-----------------------|----------------------|
| Protection Index | |
| Isolation Class | |
| Weight [Kg] | 1,3 |
| Cover | Opaline Methacrylate |
| Country of production | MADE IN ITALY |
| Mounting instruction | 025.481_9010_REV03 |

Installation

| | |
|------------------|-----------------------|
| Multisize system | NO |
| Position | Wall/Ceiling lighting |


Packaging

| | |
|----------------------|-------------------|
| Type | Brown carton tube |
| Measures AxBxH | 120x120x1100mm |
| Gross Weight [Kg] | 1,6247 |
| Master carton | NO |
| Quantity of articles | |
| Measures AxBxH | |

Technical Data Sheet

P004B-00

Fotometric Data



| | |
|---------------------------------|-------------|
| <i>Electrical part</i> | 021.792.100 |
| <i>Power</i> | 26W |
| <i>Light Output</i> | 3000lm |
| <i>Colour Temperature</i> | 3000°K |
| <i>CRI</i> | 85 |
| | |
| <i>Lamp Light Output</i> | 60% |
| <i>Light Output of the lamp</i> | 1800lm |
| <i>Beam Angle</i> | 110° |
| <i>Beam Inclination</i> | 0° |

| | | |
|--------------------|----|--------|
| <i>Illuminance</i> | 1m | 637lux |
| | 2m | 159lux |
| | 3m | 71lux |
| | 4m | 40lux |
| | 5m | 25lux |

Accessories


LED strip



| | |
|---------------------------|----------|
| <i>Code</i> | 021.790 |
| <i>Power</i> | 15W/m |
| <i>Tension</i> | 24Vdc |
| <i>Flux</i> | 1400lm/m |
| <i>Colour Temperature</i> | 3000°K |
| <i>CRI</i> | 85 |
| <i>led/m</i> | 120 |




| | |
|---------------------------|----------|
| <i>Code</i> | 021.791 |
| <i>Power</i> | 18W/m |
| <i>Tension</i> | 24Vdc |
| <i>Flux</i> | 2000lm/m |
| <i>Colour Temperature</i> | 3000°K |
| <i>CRI</i> | 85 |
| <i>led/m</i> | 224 |




| | |
|---------------------------|----------|
| <i>Code</i> | 021.792 |
| <i>Power</i> | 26W/m |
| <i>Tension</i> | 24Vdc |
| <i>Flux</i> | 3000lm/m |
| <i>Colour Temperature</i> | 3000°K |
| <i>CRI</i> | 85 |
| <i>led/m</i> | 224 |


Other Accessories




| | |
|--------------------|-------------------|
| <i>Code</i> | 023.700 |
| <i>Description</i> | Linear connection |
| <i>Notes</i> | |



| | |
|--------------------|--------------|
| <i>Code</i> | 023.701 |
| <i>Description</i> | L connection |
| <i>Notes</i> | |




| | |
|--------------------|--------------|
| <i>Code</i> | 023.702 |
| <i>Description</i> | T connection |
| <i>Notes</i> | |



| | |
|--------------------|--------------|
| <i>Code</i> | 023.703 |
| <i>Description</i> | X connection |
| <i>Notes</i> | |




| | |
|--------------------|-------------------------|
| <i>Code</i> | 023.704 |
| <i>Description</i> | Wall/Ceiling connection |
| <i>Notes</i> | |



| | |
|--------------------|--------------------|
| <i>Code</i> | P004.KIT01 |
| <i>Description</i> | Couple of end caps |
| <i>Notes</i> | |



| | |
|--------------------|------------------------|
| <i>Code</i> | 029.011.300 |
| <i>Description</i> | Replacement opal cover |
| <i>Notes</i> | L 3000mm |



| | |
|--------------------|-------------|
| <i>Code</i> | TGA |
| <i>Description</i> | Cut to size |
| <i>Notes</i> | |