



# Technical Data Sheet

Last data update


3/15/2016

9010  
novantadieci®

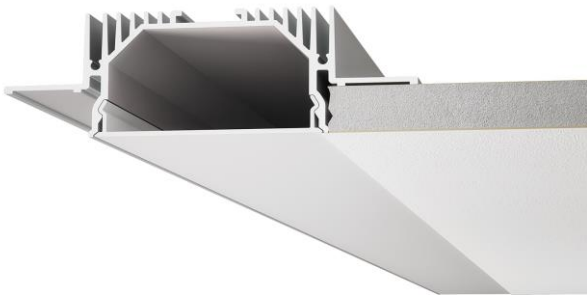

*Req. space behind the plasterboard*

30mm




*hole on the plasterboard*

60x2025 ±10mm




*External measures*

104x2020 ±10mm



*Measures of the light output*

57x2020 ±10mm



*Height without electrical part*

35mm

## Notes on measures

## General notes

## PROFILO

P004C-00

Recessed Profile / ALUMITE

Surface finish : ALUMITE

Senza parte elettrica - Without electrical part - / -

## Model

Code	P004C
Product family	PROFILO
Type	Recessed Profile

## Material/Surface finish

Code	006
Material	ALUMITE
Surface finish	ALUMITE

## Electrical part

Code	00
Type	Senza parte elettrica - Without electrical part

## General Data

Protection Index	
Isolation Class	
Weight [Kg]	2,6
Cover	Opaline Methacrylate
Country of production	MADE IN ITALY
Mounting instruction	025.481_9010_REV03

## Installation

Multisize system	NO
Position	Wall/Ceiling lighting


## Packaging

Type	Brown carton tube
Measures AxBxH	120x120x2100mm
Gross Weight [Kg]	3,2199
Master carton	NO
Quantity of articles	
Measures AxBxH	

## Technical Data Sheet

P004C-00

### Fotometric Data

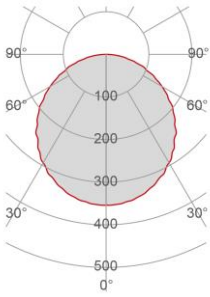

<i>Electrical part</i>	021.792.200
<i>Power</i>	52W
<i>Light Output</i>	6000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	60%
<i>Light Output of the lamp</i>	3600lm
<i>Beam Angle</i>	110°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	<i>1m</i>	<i>1274lux</i>
	<i>2m</i>	<i>319lux</i>
	<i>3m</i>	<i>142lux</i>
	<i>4m</i>	<i>80lux</i>
	<i>5m</i>	<i>51lux</i>

### Accessories


#### LED strip



<i>Code</i>	021.790
<i>Power</i>	15W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	1400lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	120




<i>Code</i>	021.791
<i>Power</i>	18W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	2000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224




<i>Code</i>	021.792
<i>Power</i>	26W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	3000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224


#### Other Accessories




<i>Code</i>	023.700
<i>Description</i>	Linear connection
<i>Notes</i>	



<i>Code</i>	023.701
<i>Description</i>	L connection
<i>Notes</i>	




<i>Code</i>	023.702
<i>Description</i>	T connection
<i>Notes</i>	



<i>Code</i>	023.703
<i>Description</i>	X connection
<i>Notes</i>	




<i>Code</i>	023.704
<i>Description</i>	Wall/Ceiling connection
<i>Notes</i>	



<i>Code</i>	P004.KIT01
<i>Description</i>	Couple of end caps
<i>Notes</i>	



<i>Code</i>	029.011.300
<i>Description</i>	Replacement opal cover
<i>Notes</i>	L 3000mm



<i>Code</i>	TGA
<i>Description</i>	Cut to size
<i>Notes</i>	