


# Technical Data Sheet

Last data update


3/15/2016

9010  
novantadieci®

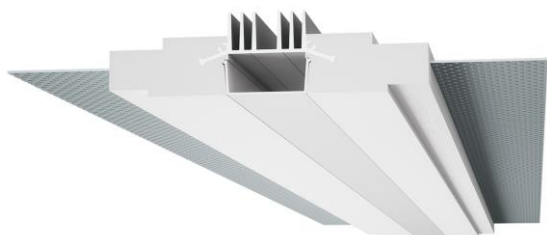


Req. space behind the plasterboard

40mm




hole on the plasterboard

125x1005(1045\*)mm



External measures

120x1000mm



Measures of the light output

30x1000mm



Height without electrical part

35mm



Height including the electrical part

35mm

## Notes on measures

## General notes

## PROFILO

4190B-00

Recessed Profile / CRISTALY + ALUMITE

Surface finish : CRISTALY

Senza parte elettrica - Without electrical part - / -

## Model

Code	4190B
Product family	PROFILO
Type	Recessed Profile

## Material/Surface finish

Code	004
Material	CRISTALY + ALUMITE
Surface finish	CRISTALY

## Electrical part

Code	00
Type	Senza parte elettrica - Without el

## General Data

Protection Index	
Isolation Class	
Weight [Kg]	4,5
Cover	Opal Polycarbonate
Country of production	MADE IN ITALY
Mounting instruction	025.491_9010_REV03

## Installation

Multisize system	NO
Position	Wall/Ceiling lighting


## Packaging

Type	White american Box
Measures AxBxH	240x1310x170mm
Gross Weight [Kg]	5,5957
Master carton	NO
Quantity of articles	
Measures AxBxH	

# Technical Data Sheet

4190B-00

## Fotometric Data

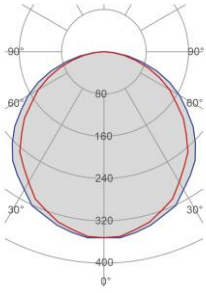

<i>Electrical part</i>	021.792.100
<i>Power</i>	26W
<i>Light Output</i>	3000lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	47%
<i>Light Output of the lamp</i>	1410lm
<i>Beam Angle</i>	106°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	<i>1m</i>	<i>496lux</i>
	<i>2m</i>	<i>124lux</i>
	<i>3m</i>	<i>55lux</i>
	<i>4m</i>	<i>31lux</i>
	<i>5m</i>	<i>20lux</i>

## Accessories


### LED strip



<i>Code</i>	021.790
<i>Power</i>	15W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	1400lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	120



<i>Code</i>	021.791
<i>Power</i>	18W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	2000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224



<i>Code</i>	021.792
<i>Power</i>	26W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	3000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224

### Other Accessories



<i>Code</i>	029.005
<i>Description</i>	Replacement opal cover
<i>Notes</i>	in rotolo



<i>Code</i>	TGC
<i>Description</i>	Cut to size
<i>Notes</i>	

<i>Code</i>	4190K-00
<i>Description</i>	
<i>Notes</i>	