



# Technical Data Sheet

Last data update

3/15/2016

9010  
novantadieci®

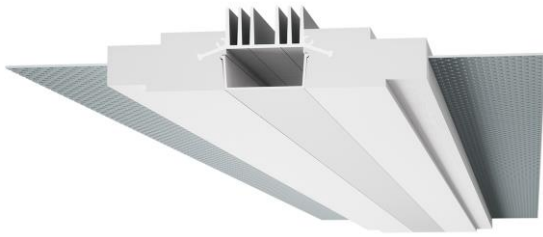


Req. space behind the plasterboard

40mm




hole on the plasterboard

125x1505(1545\*)mm




External measures

120x1500mm



Measures of the light output

30x1500mm



Height without electrical part

35mm



Height including the electrical part

35mm

## Notes on measures

## General notes

## PROFILO

4190C-00

Recessed Profile / CRISTALY + ALUMITE

Surface finish : CRISTALY

Senza parte elettrica - Without electrical part - / -

## Model

Code 4190C  
Product family PROFILO  
Type Recessed Profile

## Material/Surface finish

Code 004  
Material CRISTALY + ALUMITE  
Surface finish CRISTALY

## Electrical part

Code 00  
Type Senza parte elettrica - Without electrical part

## General Data

Protection Index  
Isolation Class  
Weight [Kg] 6,8  
Cover Opal Polycarbonate  
Country of production MADE IN ITALY  
Mounting instruction 025.491\_9010\_REV03

## Installation

Multisize system NO  
Position Wall/Ceiling lighting


## Packaging

Type White american Box  
Measures AxBxH 240x1610x170mm  
Gross Weight [Kg] 8,1466  
Master carton NO  
Quantity of articles  
Measures AxBxH

## Technical Data Sheet

4190C-00

### Fotometric Data

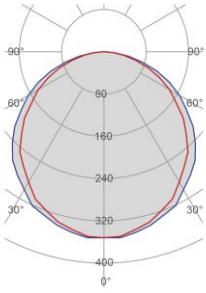

<i>Electrical part</i>	021.792.150
<i>Power</i>	39W
<i>Light Output</i>	4500lm
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>Lamp Light Output</i>	47%
<i>Light Output of the lamp</i>	2115lm
<i>Beam Angle</i>	106°
<i>Beam Inclination</i>	0°

<i>Illuminance</i>	<i>1m</i>	744lux
	<i>2m</i>	186lux
	<i>3m</i>	83lux
	<i>4m</i>	47lux
	<i>5m</i>	30lux

### Accessories

#### LED strip



<i>Code</i>	021.790
<i>Power</i>	15W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	1400lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	120



<i>Code</i>	021.791
<i>Power</i>	18W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	2000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224



<i>Code</i>	021.792
<i>Power</i>	26W/m
<i>Tension</i>	24Vdc
<i>Flux</i>	3000lm/m
<i>Colour Temperature</i>	3000°K
<i>CRI</i>	85
<i>led/m</i>	224

#### Other Accessories



<i>Code</i>	029.005
<i>Description</i>	Replacement opal cover in rotolo
<i>Notes</i>	



<i>Code</i>	TGC
<i>Description</i>	Cut to size
<i>Notes</i>	

<i>Code</i>	4190K-00
<i>Description</i>	
<i>Notes</i>	