


TECHNICAL DATA SHEET

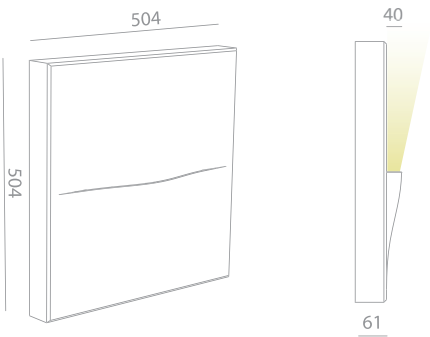

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT ATMOS

REF N° 745 01 000 For mounting into gypsum walls

 505x505 mm. Housing: perforated aluminium

ATMOS LED 600LM 230 VAC

REF N° 145 71 500 phase DIM CRI 80 2200°K

REF N° 145 71 000 phase DIM CRI 90 2700°K

REF N° 145 71 100 phase DIM CRI 90 3000°K

REF N° 145 31 500 DIM DALI CRI 80 2200°K

REF N° 145 31 000 DIM DALI CRI 90 2700°K

REF N° 145 31 100 DIM DALI CRI 90 3000°K

230V/50Hz - 6,5W - incl. line voltage LEDdriver

600lm@85°C - 700lm@25°C -  -  - IP20

parallel wiring  -  - 850°C  

Integrated line voltage LED driver

Connects directly to 230 VAC

2 SDCM - 2 Step MacAdam

