
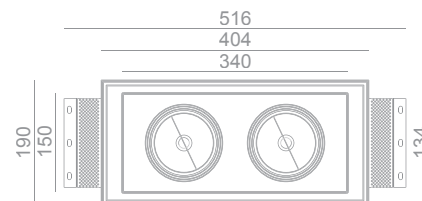


# TECHNICAL DATA SHEET

## INDOX 2X111 LED 1300LM CRI 97

REF N° 232 23 940 Adj. on/off 2700K  
 REF N° 232 23 840 Adj. on/off 3000K  
 REF N° 232 23 842 Adj. on/off Vibrant V930  
 REF N° 232 63 940 Adj. DIM 1-10V 2700K  
 REF N° 232 63 840 Adj. DIM 1-10V 3000K  
 REF N° 232 63 842 Adj. DIM 1-10V Vibrant V930  
 REF N° 232 33 940 Adj. DIM DALI 2700K  
 REF N° 232 33 840 Adj. DIM DALI 3000K  
 REF N° 232 33 842 Adj. DIM DALI Vibrant V930


2xXicato LED - 2x17,6W - 2x1300lm@70°C  
 □ - 230V/50Hz - incl LED driver - 36°  
 ▽ - IP20 (0.5m) - CE - 850°C - 2 SDCM  
 h=181 - 194x408 mm



Included: installation system for gypsum ceiling 9 - 12 - 15 mm

### OPTIONAL INSTALLATION KIT

REF N° 232 99 025 installation system for gypsum ceiling 25 mm  
 REF N° 232 99 030 installation system for gypsum ceiling 30 mm  
 REF N° 201 00 060 Frosted diffuser for 111 LED series  
 REF N° 832 00 000 Concrete box Indox 2x111 - Galvanized steel

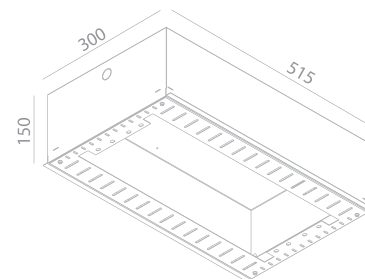

## INDOX 2X111 LED 1300LM CRI 80

REF N° 232 23 040 Adj. on/off 2700K  
 REF N° 232 23 140 Adj. on/off 3000K  
 REF N° 232 23 142 Adj. on/off Vibrant V830  
 REF N° 232 63 040 Adj. DIM 1-10V 2700K  
 REF N° 232 63 140 Adj. DIM 1-10V 3000K  
 REF N° 232 63 142 Adj. DIM 1-10V Vibrant V830  
 REF N° 232 33 040 Adj. DIM DALI 2700K  
 REF N° 232 33 140 Adj. DIM DALI 3000K  
 REF N° 232 33 142 Adj. DIM DALI Vibrant V830

2xXicato LED - 2x11,7W - 2x1300lm@70°C  
 □ - 230V/50Hz - incl LED driver - 36°  
 ▽ - IP20 (0.5m) - CE - 850°C - 2 SDCM  
 h=181 - 194x408 mm

## INDOX 2X111 LED 2000LM CRI 80

REF N° 232 25 040 Adj. on/off 2700K  
 REF N° 232 25 140 Adj. on/off 3000K  
 REF N° 232 25 142 Adj. on/off Vibrant V830  
 REF N° 232 65 040 Adj. DIM 1-10V 2700K  
 REF N° 232 65 140 Adj. DIM 1-10V 3000K  
 REF N° 232 65 142 Adj. DIM 1-10V Vibrant V830  
 REF N° 232 35 040 Adj. DIM DALI 2700K  
 REF N° 232 35 140 Adj. DIM DALI 3000K  
 REF N° 232 35 142 Adj. DIM DALI Vibrant V830

2xXicato LED - 2x19,5W - 2x2000lm@70°C  
 □ - 230V/50Hz - incl LED driver - 36°  
 ▽ - IP20 (0.5m) - CE - 850°C - 2 SDCM  
 h=181 - 194x408 mm

## INDOX 2X111 AR

REF N° 232 13 100 Adj.

2xQR-LP 111 - 35-50-75-100W  
 G53 - 12V - excl. transfo  
 ▽ - (1.0m) - CE - IP20 - 850°C  
 h=116 - 194x408 mm

## INDOX 2X111 CDM

REF N° 232 19 070 Adj. CDM-TC - G8.5  
 REF N° 232 12 070 Adj. CDM-R - GX8.5

2x35W or 2x70W - 230V/50Hz - excl. EVG  
 ▽ - (0.5m) - CE - IP20 - 850°C  
 h=154 - 194x408 mm