

# TECHNICAL DATA SHEET

## PIXO 50 LED 700LM CRI 80



REF N° 261 72 040 Adj. ⚡ phase DIM 2700K  
 REF N° 261 72 140 Adj. ⚡ phase DIM 3000K  
 REF N° 261 72 142 Adj. ⚡ phase DIM Vibrant V830  
 REF N° 261 72 240 Adj. ⚡ phase DIM 4000K  
 REF N° 261 62 040 Adj. ⚡ DIM 1-10V 2700K  
 REF N° 261 62 140 Adj. ⚡ DIM 1-10V 3000K  
 REF N° 261 62 142 Adj. ⚡ DIM 1-10V Vibrant V830  
 REF N° 261 62 240 Adj. ⚡ DIM 1-10V 4000K

Xicato LED - 8,3 W - 720lm @ 70°C  
 ☐ - 230V/50Hz - incl LED driver - IP20  
 36° - ▽ - (⊥0.5m) - ⚡ CE - 850°C - 2 SDCM  
 h=123 - ⊞ 114x134 mm

## PIXO 50 LED 500LM CRI 97

REF N° 261 72 940 Adj. ⚡ phase DIM 2700K  
 REF N° 261 72 840 Adj. ⚡ phase DIM 3000K  
 REF N° 261 72 842 Adj. ⚡ phase DIM Vibrant V930  
 REF N° 261 72 740 Adj. ⚡ phase DIM 4000K  
 REF N° 261 62 940 Adj. ⚡ DIM 1-10V 2700K  
 REF N° 261 62 840 Adj. ⚡ DIM 1-10V 3000K  
 REF N° 261 62 842 Adj. ⚡ DIM 1-10V Vibrant V930  
 REF N° 261 62 740 Adj. ⚡ DIM 1-10V 4000K


Xicato LED - 8,5 W - 500lm @ 70°C  
 ☐ - 230V/50Hz - inclusive LED driver  
 36° - ▽ - (⊥0.5m) - ⚡ CE - 850°C - 2 SDCM  
 h=123 - ⊞ 114x134 mm

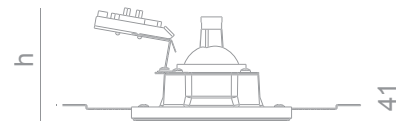

242

130

ø 80

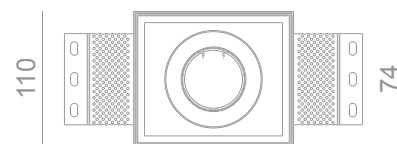

## PIXO 50 LED 700LM CRI 80 FIX IP54

REF N° 261 72 041 BATHROOM phase DIM 2700K  
 REF N° 261 72 141 BATHROOM phase DIM 3000K  
 REF N° 261 72 045 OUTDOOR phase DIM 2700K  
 REF N° 261 72 145 OUTDOOR phase DIM 3000K

Xicato LED - 8,3 W - 720lm @ 70°C  
 ☐ - 230V/50Hz - inclusive LED driver  
 36° - ▽ - (⊥0.5m) - ⚡ CE - 850°C - 2 SDCM  
 Outdoor: Waterproof Calcyt+®  
 h=123 - ⊞ 114x134 mm

## PIXO 50 LED 500LM CRI 97 FIX IP54

REF N° 261 72 941 BATHROOM phase DIM 2700K  
 REF N° 261 72 841 BATHROOM phase DIM 3000K  
 REF N° 261 72 945 OUTDOOR phase DIM 2700K  
 REF N° 261 72 845 OUTDOOR phase DIM 3000K

Xicato LED - 8,5 W - 500lm @ 70°C  
 ☐ - 230V/50Hz - inclusive LED driver  
 36° - ▽ - (⊥0.5m) - ⚡ CE - 850°C - 2 SDCM  
 Outdoor: Waterproof Calcyt+®  
 h=123 - ⊞ 114x134 mm

Included: installation system for gypsum ceiling 9 - 12 - 15 mm

### OPTIONAL INSTALLATION KIT

REF N° 261 99 025 installation system for gypsum ceiling 25 mm  
 REF N° 261 99 030 installation system for gypsum ceiling 30 mm  
 REF N° 200 50 000 clip on lampholder ring, without diffusor  
 REF N° 200 50 001 clip on lampholder ring - with frosted diffusor  
 REF N° 827 00 000 Concrete box Pixo 50 - Galvanized steel

## PIXO 50 HAL

REF N° 227 10 050 Fix. IP20  
 REF N° 261 10 050 Adj. ⚡ IP20  
 REF N° 227 10 051 Fix. IP54 BATHROOM  
 REF N° 227 10 055 Fix. IP54 OUTDOOR

⚡ QR-CBC 51 - 50W - Gx5.3 - 12V - ⚡ CE  
 excl lamp and transfo - ▽ - (⊥0.5m) - 850°C  
 Outdoor: Waterproof Calcyt+®  
 ⚡ - h=95 - ⊞ 114x134 mm

## PIXO 50 ES

REF N° 227 11 050 Fix. IP20  
 REF N° 261 11 050 Adj. ⚡ IP20  
 REF N° 227 11 051 Fix. IP54 BATHROOM  
 REF N° 227 11 055 Fix. IP54 OUTDOOR

⚡ QPAR 16 - 50W - GZ10/GU10 - ⚡ CE  
 230V/50Hz - excl. lamp - ▽ - (⊥0.5m) - 850°C  
 Outdoor: Waterproof Calcyt+®  
 ⚡ - h=100 - ⊞ 114x134 mm

