
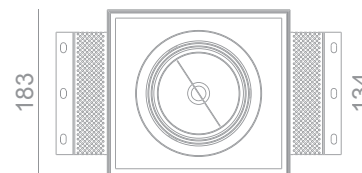




TECHNICAL DATA SHEET

PIXO 111 LED 1300LM CRI 97

REF N° 228 23 940 Adj. Ⓢ on/off 2700K
 REF N° 228 23 840 Adj. Ⓢ on/off 3000K
 REF N° 228 23 842 Adj. Ⓢ on/off Vibrant V930
 REF N° 228 63 940 Adj. Ⓢ DIM 1-10V 2700K
 REF N° 228 63 840 Adj. Ⓢ DIM 1-10V 3000K
 REF N° 228 63 842 Adj. Ⓢ DIM 1-10V Vibrant V930
 REF N° 228 33 940 Adj. Ⓢ DIM DALI 2700K
 REF N° 228 33 840 Adj. Ⓢ DIM DALI 3000K
 REF N° 228 33 842 Adj. Ⓢ DIM DALI Vibrant V930


Xicato LED - 17,6W - 1300 lm @ 70°C
 □ - 230V/50Hz Ⓢ - incl LED driver - 36°
 ▽ - IP20 Ⓢ - CE - 850°C - 2 SDCM
 h=173 - □ 187x204 mm



Included: installation system for gypsum ceiling 9 - 12 - 15 mm

OPTIONAL INSTALLATION KIT

REF N° 228 99 025 installation system for gypsum ceiling 25 mm
 REF N° 228 99 030 installation system for gypsum ceiling 30 mm
 REF N° 201 00 060 Frosted diffuser for 111 LED series
 REF N° 828 00 000 Concrete box Pixo 111 - Galvanized steel



PIXO 111 LED 1300LM CRI 80

REF N° 228 23 040 Adj. Ⓢ on/off 2700K
 REF N° 228 23 140 Adj. Ⓢ on/off 3000K
 REF N° 228 23 142 Adj. Ⓢ on/off Vibrant V830
 REF N° 228 63 040 Adj. Ⓢ DIM 1-10V 2700K
 REF N° 228 63 140 Adj. Ⓢ DIM 1-10V 3000K
 REF N° 228 63 142 Adj. Ⓢ DIM 1-10V Vibrant V830
 REF N° 228 33 040 Adj. Ⓢ DIM DALI 2700K
 REF N° 228 33 140 Adj. Ⓢ DIM DALI 3000K
 REF N° 228 33 142 Adj. Ⓢ DIM DALI Vibrant V830

Xicato LED - 11,7W - 1300 lm @ 70°C
 □ - 230V/50Hz Ⓢ - incl LED driver - 36°
 ▽ - IP20 Ⓢ - CE - 850°C - 2 SDCM
 h=173 - □ 187x204 mm

PIXO 111 LED 2000LM CRI 80

REF N° 228 25 040 Adj. Ⓢ on/off 2700K
 REF N° 228 25 140 Adj. Ⓢ on/off 3000K
 REF N° 228 25 142 Adj. Ⓢ on/off Vibrant V830
 REF N° 228 65 040 Adj. Ⓢ DIM 1-10V 2700K
 REF N° 228 65 140 Adj. Ⓢ DIM 1-10V 3000K
 REF N° 228 65 142 Adj. Ⓢ DIM 1-10V Vibrant V830
 REF N° 228 35 040 Adj. Ⓢ DIM DALI 2700K
 REF N° 228 35 140 Adj. Ⓢ DIM DALI 3000K
 REF N° 228 35 142 Adj. Ⓢ DIM DALI Vibrant V830

Xicato LED - 19,5W - 2000 lm @ 70°C
 □ - 230V/50Hz Ⓢ - incl LED driver - 36°
 ▽ - IP20 Ⓢ - CE - 850°C - 2 SDCM
 h=173 - □ 187x204 mm

PIXO 111 AR

REF N° 228 13 100 Adj. Ⓢ

QR-LP 111 - 35-50-75-100W
 G53 - 12V - Ⓢ - excl. transfo
 ▽ - Ⓢ - CE - Ⓢ - IP20 - 850°C
 h= 107 - □ 187x204 mm

PIXO 111 CDM

REF N° 228 19 070 Adj. Ⓢ CDM-TC - G8.5
 REF N° 228 12 070 Adj. Ⓢ CDM-R - GX8.5

35W or 70W - 230V/50Hz - Ⓢ - excl. EVG
 ▽ - Ⓢ - CE - Ⓢ - IP20 - 850°C
 h= 146 - □ 187x204 mm