

# TECHNICAL DATA SHEET

## SLIM LED ON/OFF 350LM 230VAC

REF N° 107 21 500 IP20 CRI 80 2200°K  
 REF N° 107 21 000 IP20 CRI 80 2700°K  
 REF N° 107 21 100 IP20 CRI 80 3000°K  
 REF N° 107 21 001 IP54 BATHROOM CRI 80 2700°K  
 REF N° 107 21 101 IP54 BATHROOM CRI 80 3000°K  
 REF N° 107 21 201 IP54 BATHROOM CRI 80 4000°K  
 REF N° 107 21 005 IP54 OUTDOOR CRI 80 2700°K  
 REF N° 107 21 105 IP54 OUTDOOR CRI 80 3000°K  
 REF N° 107 21 205 IP54 OUTDOOR CRI 80 4000°K

230V/50Hz -4,5W - incl. line voltage LEDdriver  
 350lm@85°C - 400lm@25°C - **E** - **CE** - IP20  
 parallel wiring  $\nabla$  -  $\text{---}$  - 850°C  $\text{---}$   
 Connects directly to 230 VAC  
 2 SDCM - 2 Step MacAdam  
 Outdoor: Waterproof Calcyt+®

## SLIM HAL

REF N° 107 01 040

$\text{---}$  QT14 - max 40W - G9  
 230V/50Hz  $\text{---}$  -  $\text{---}$  -  $\text{---}$  - **E** - **CE**  
 IP20 - 850°C dimmable -  $\text{---}$

## SLIM LED DIM 350LM REMOTE DRIVER


REF N° 107 29 500 IP20 CRI 80 2200°K  
 REF N° 107 29 000 IP20 CRI 80 2700°K  
 REF N° 107 29 100 IP20 CRI 80 3000°K  
 REF N° 107 29 001 IP54 BATHROOM CRI 80 2700°K  
 REF N° 107 29 101 IP54 BATHROOM CRI 80 3000°K  
 REF N° 107 29 201 IP54 BATHROOM CRI 80 4000°K  
 REF N° 107 29 005 IP54 OUTDOOR CRI 80 2700°K  
 REF N° 107 29 105 IP54 OUTDOOR CRI 80 3000°K  
 REF N° 107 29 205 IP54 OUTDOOR CRI 80 4000°K

4,5W - excl. LEDdriver  
 350lm@85°C - 400lm@25°C - **E** - **CE** - IP20  
 serial wiring  $\nabla$  -  $\text{---}$  - 850°C  $\text{---}$   
 Requires remote LED driver DIM  
 2 SDCM - 2 Step MacAdam  
 Outdoor: Waterproof Calcyt+®

## REMOTE LED DRIVER DIM

REF N° 697 60 040 DIM 1-10V DALI PUSH 30W

230V/50Hz -  $\text{---}$  - current controlled  
 $\nabla$  - **CE** - IP20 - 250mA/350mA

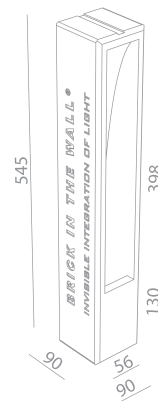

Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

## PLASTERKIT SLIM

REF N° 707 01 000 For mounting into gypsum walls

$\text{---}$  95x550 mm. Housing: perforated aluminium

