


# TECHNICAL DATA SHEET

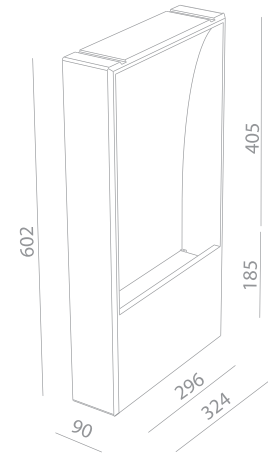

## XT LED 2000LM 230VAC

**REF N° 108 74 000** phase DIM 2700°K  
**REF N° 108 74 100** phase DIM 3000°K  
**REF N° 108 64 000** DIM 1-10V 2700°K  
**REF N° 108 64 100** DIM 1-10V 3000°K

230V/50Hz - 24W - incl. line voltage driver  
 1900lm@85°C - 2100lm@25°C - - IP20  
 parallel wiring - - 850°C   
 Colour Rendering Index CRI 90 - R9=75  
 2 SDCM - 2 Step MacAdam

Ready for installation in solid walls  
 Optional plasterkit for installation into gypsum walls

## PLASTERKIT XT

**REF N° 708 01 000** For mounting into gypsum walls  
 329x607 mm. Housing: perforated aluminium

## XT FLUO 42W

**REF N° 108 01 042**

TC-TEL 42W  
 GX24q-4 - 230V/50Hz - - incl. EVG  
 - - - IP20 - 850°C

## XT FLUO 57W

**REF N° 108 01 057**

TC-TEL 57W  
 GX24q-5 - 230V/50Hz - - incl. EVG  
 - - - IP20 - 850°C

