

# TECHNICAL DATA SHEET

## MINI LED DIM 100 LM

**REF N° 149 60 500** CRI 80 warm white 2200°K  
**REF N° 149 60 000** CRI 90 warm white 2700°K  
**REF N° 149 60 100** CRI 90 warm white 3000°K  
**REF N° 149 60 300** royal blue

◈ - 1W - excl. LED driver - current controlled 350 mA - ▽ - 0.2m - E - CE - IP40 - P - eco - serial wiring  
3 SDCM - 3 Step MacAdam  
Requires remote LED driver  
current controlled 350 mA

## MINI LED DIM 400 LM

**REF N° 149 61 000** CRI 80 warm white 2700°K  
**REF N° 149 61 100** CRI 80 warm white 3000°K  
**REF N° 149 61 200** CRI 80 neutral white 4000°K

◈ - 4W - excl. LED driver - current controlled 350 mA - ▽ - 0.2m - E - CE - IP40 - P - eco - serial wiring  
2 SDCM - 2 Step MacAdam  
Requires remote LED driver  
current controlled 350 mA

## REMOTE LED DRIVER ON/OFF


**REF N° 697 00 006** 8W  
**REF N° 697 00 015** 15W  
**REF N° 697 00 025** 25W

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 350mA - not dimmable

## REMOTE LED DRIVER DIM

**REF N° 697 60 006** 6W 1-10V  
**REF N° 697 60 015** 15W 1-10V  
**REF N° 697 30 015** 15W DALI  
**REF N° 697 60 025** 25W 1-10V DALI PUSH  
**REF N° 697 60 040** 40W 1-10V DALI PUSH  
**REF N° 697 70 009** 9W PHASE DIM (tr. edge)  
**REF N° 697 70 017** 17W PHASE DIM

230V/50Hz - □ - current controlled  
▽ - CE - IP20 - 350mA - dimmable

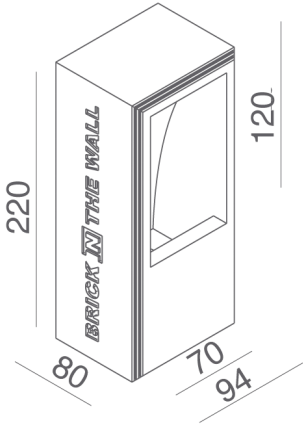

Ready for installation in solid walls  
Optional plasterkit for installation into gypsum walls

## PLASTERKIT MINI

**REF N° 749 01 000** For mounting into gypsum walls  
10x238 mm. Housing: perforated aluminium