

TECHNICAL DATA SHEET

STRIPP XL LED DIM

REF N° 143 60 500 CRI 80 warm white 2200°K

REF N° 143 60 000 CRI 90 warm white 2700°K

REF N° 143 60 100 CRI 90 warm white 3000°K

REF N° 143 60 300 royal blue

⬠ - 1W - excl. LED driver - current controlled 350 mA - ▽ - Ⓢ - 0.2m - Ⓢ

CE - IP40 - Ⓢ - eco - serial wiring

3 SDCM - 3 Step MacAdam

Requires remote LED driver

current controlled 350 mA

Made in waterproof Calcyt+®

REMOTE LED DRIVER ON/OFF

REF N° 697 00 006 8W

REF N° 697 00 015 15W

REF N° 697 00 025 25W

230V/50Hz - Ⓢ - current controlled

▽ - CE - IP20 - 350mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 006 6W 1-10V

REF N° 697 60 015 15W 1-10V

REF N° 697 30 015 15W DALI

REF N° 697 60 025 25W 1-10V DALI PUSH


REF N° 697 60 040 40W 1-10V DALI PUSH

REF N° 697 70 009 9W PHASE DIM (tr. edge)

REF N° 697 70 017 17W PHASE DIM

230V/50Hz - Ⓢ - current controlled

▽ - CE - IP20 - 350mA - dimmable

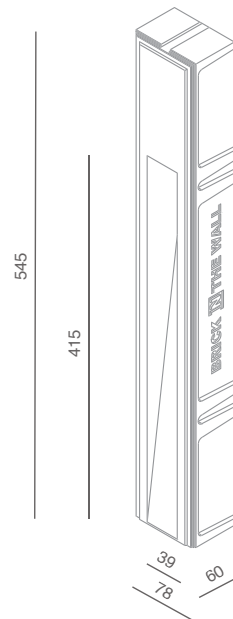

Ready for installation in solid walls
Optional plasterkit for installation into gypsum walls

PLASTERKIT STRIPP XL

REF N° 743 01 000 For mounting into gypsum walls

Ⓢ 83x550 mm. Housing: perforated aluminium