

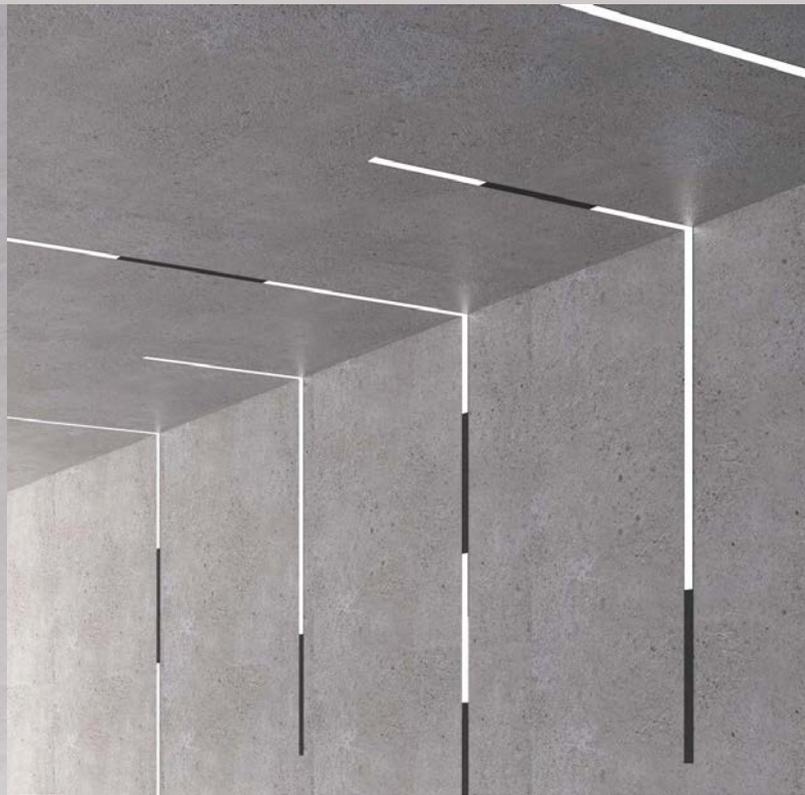
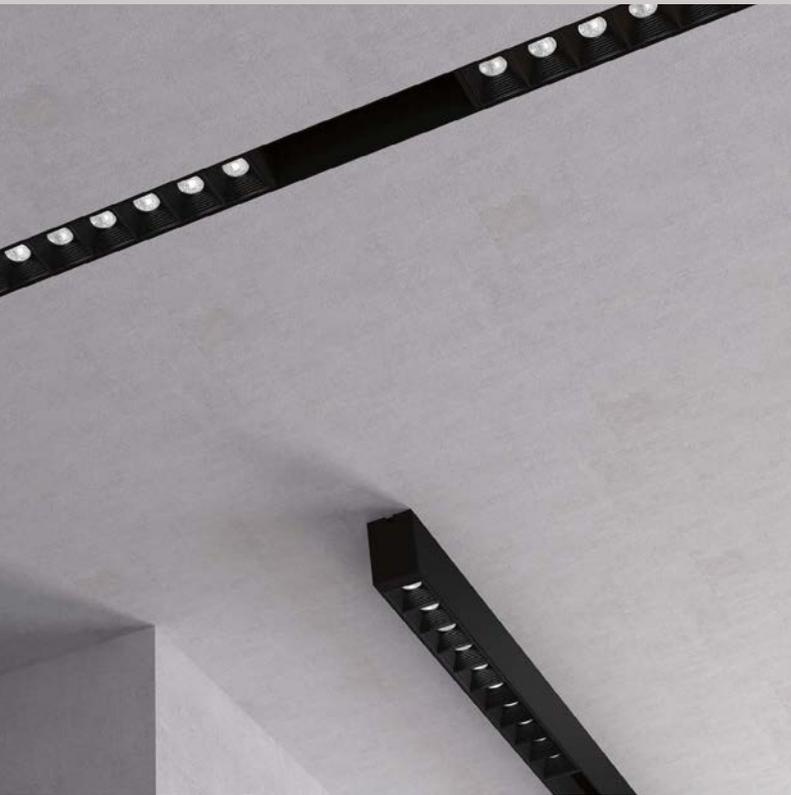


SHADOWLINE
LED LINEAR TRACK SYSTEM

DLD
CONTRACT

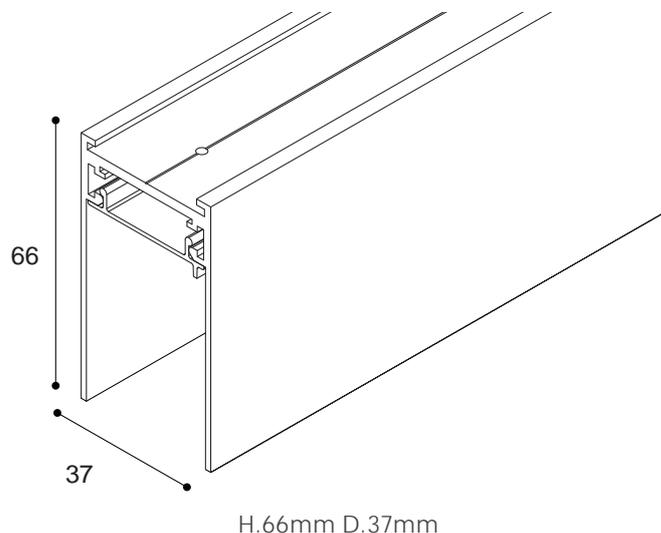

SURFACE MOUNTED TRACK

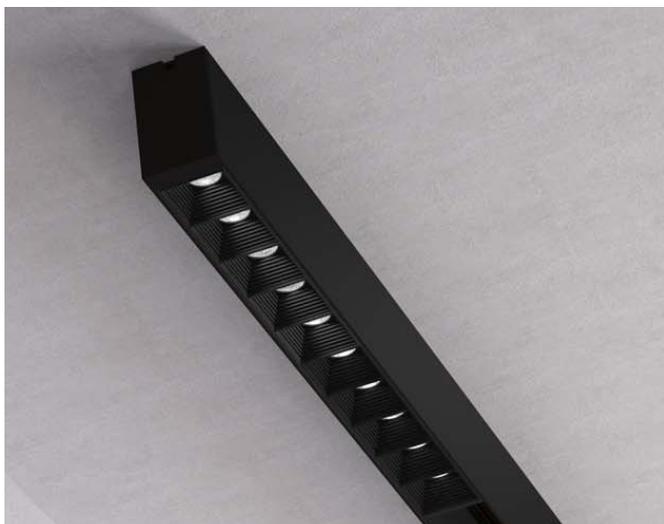

- Aluminium extrusion
- Use hanging kit to suspend from ceiling
- Supplied with black PC extrusion cover & end caps
- Cut-to-length

Product code


Length

20-TDS

2100mm

ACCESSORIES - SURFACE MOUNTED TRACK


30-IDS
2 x Steel surface mounted clips




ACCESSORIES - SUSPENSION TRACK

Surface mounted track can be hung from the ceiling using the accesories below:


40-IDS
2 x 1500mm stainless steel hanging kit



50-IDS
2 x 1500mm stainless steel hanging kit,
1 x with power cable



RECESSED TRACK

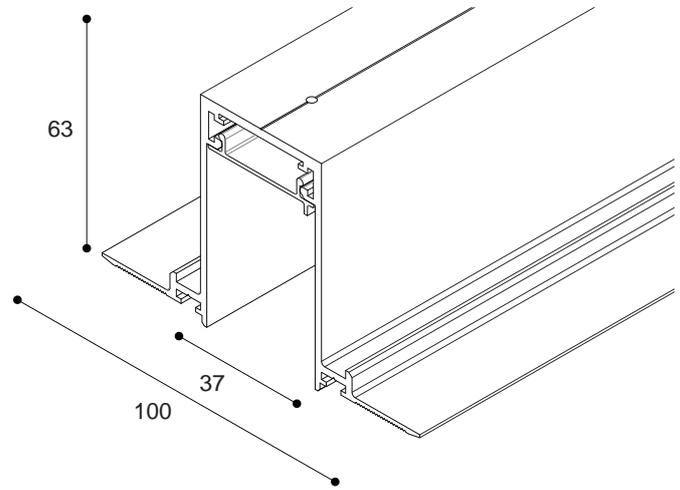

H.63mm D.37mm Full D.100mm

- Aluminium extrusion
- Supplied with black PC extrusion cover & end caps

- Cut-to-length

Product code

Length

20-RDS

2100mm


ACCESSORIES

- Connecting corners for surface mounted, suspension and recessed tracks


- Aluminium extrusion

Corners for Surface Mounted / Suspension Track

Surface mounted | Suspension | Vertical corner
40-TDS

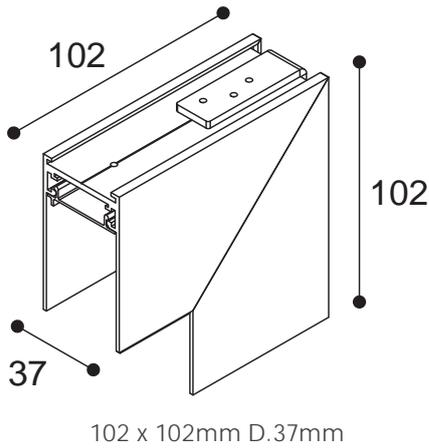


Surface mounted | Suspension | Horizontal corner
50-TDS

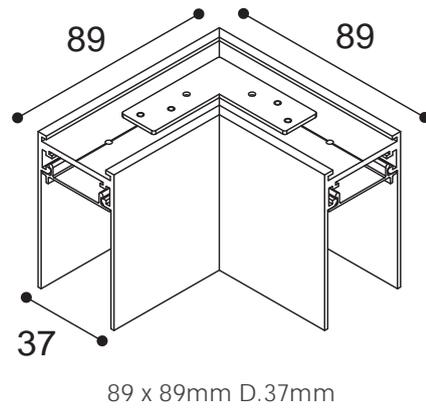


Corners for Recessed Track

Recessed | Vertical corner
40-RDS

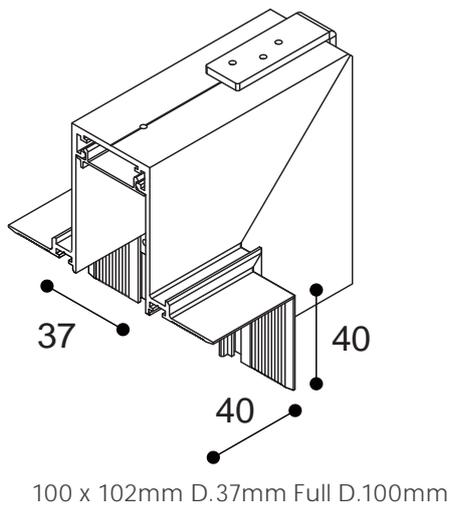


Recessed | Horizontal corner
50-RDS

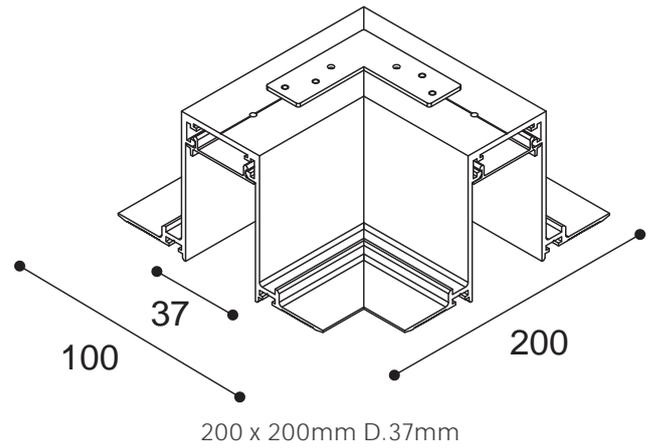


ACCESSORIES

Connectors for Surface Mounted Track

Surface mounted | Straight circuit joint
10-CDS

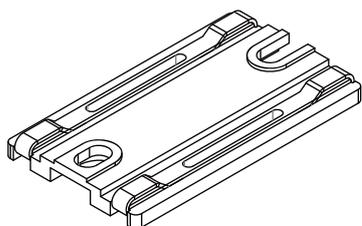


Surface mounted | Straight circuit joint 2m power cable
20-CDS




Connectors for Recessed Track

Recessed | Straight circuit joint
A10-CDS

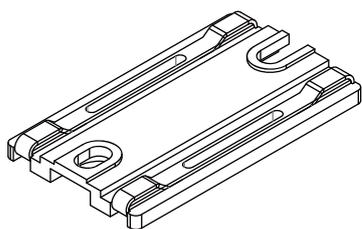


Recessed | Straight circuit joint 2m power cable
A20-CDS




UNIVERSAL ACCESSORIES


End cap
40-CDS




End cap 2m power cable
30-CDS




2 x Reinforced joint
50-CDS



Surface mounted
reinforced plate
60-CDS




LED DOWNLIGHT MODULE FOR TRACK

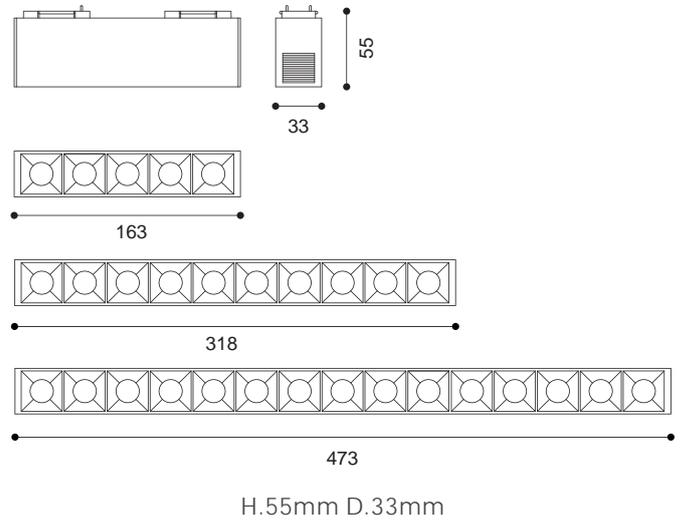

- Aluminium extrusion body
- ABS plastic baffle
- In 3 sizes - 5 LED, 10 LED or 15 LED version
- Driver required

| Product code | Length | LED Consumption | Voltage | Lumen | Beam angle | Light temp. | CRI |
|--------------|--------|-----------------|---------|-------------|-----------------|-------------|-----|
| A5047161 | 163mm | 11W | 24V DC | 200 lm x 5 | 10° / 15° / 30° | 3000°K | 90+ |
| B5047161 | 318mm | 22W | 24V DC | 200 lm x 10 | 10° / 15° / 30° | 3000°K | 90+ |
| C5047161 | 473mm | 33W | 24V DC | 200 lm x 15 | 10° / 15° / 30° | 3000°K | 90+ |


LINEAR LED MODULE FOR TRACK

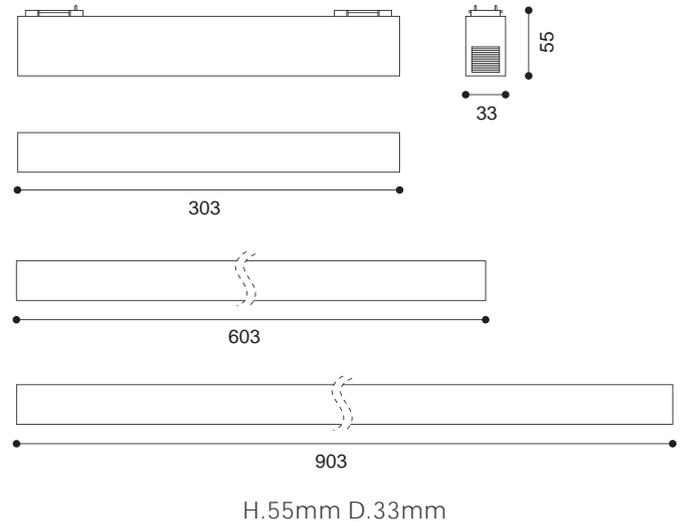

- Aluminium extrusion body
- ABS plastic cover
- In 3 sizes
- Driver required

| Product code | Length | LED Consumption | Voltage | Lumen | Beam angle | Light temp. | CRI |
|--------------|--------|-----------------|---------|---------|------------|-------------|-----|
| A6047161 | 303mm | 9.2W | 24V DC | 469 lm | 110° | 3000°K | 80+ |
| B6047161 | 603mm | 18.4W | 24V DC | 938 lm | 110° | 3000°K | 80+ |
| C6047161 | 903mm | 27.5W | 24V DC | 1407 lm | 110° | 3000°K | 80+ |

LED SPOT LIGHT MODULE FOR TRACK

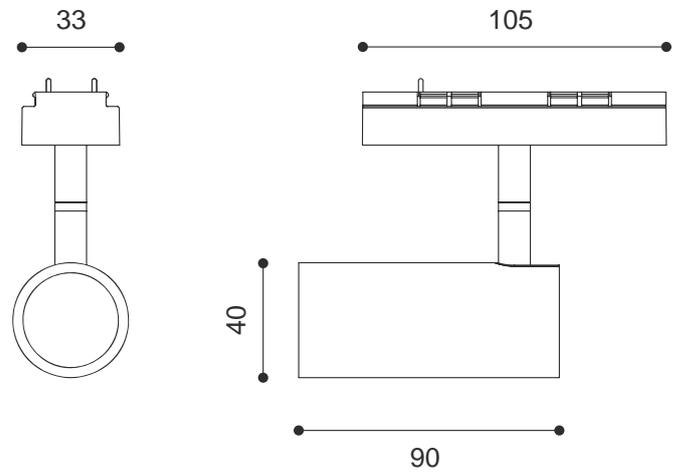


Ø40mm D.33mm L.90mm

- Aluminium extrusion body
- PC plastic cover and lens
- Steel gear box
- Driver required

| Product code | Length | LED Consumption | Voltage | Lumen | Beam angle | Light temp. | CRI |
|--------------|--------|-----------------|---------|--------|------------|-------------|-----|
| 7047161 | - | 6.2W | 24V DC | 626 lm | 10° / 20° | 3000°K | 90+ |

LED TWIN HEAD DOWNLIGHT MODULE FOR TRACK

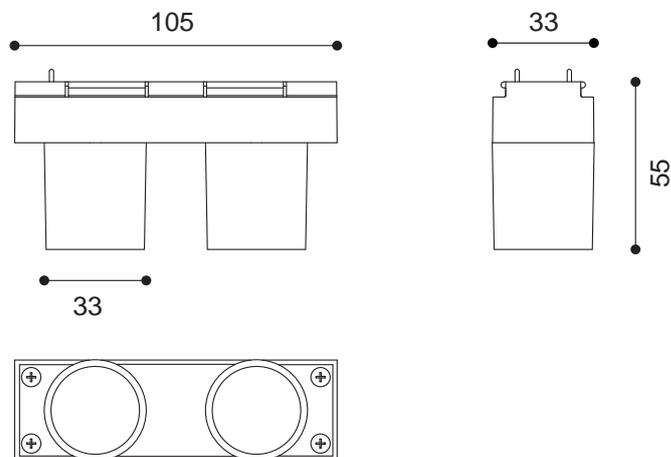

Ø33mm D.33mm L.105mm H.55mm

- Aluminium die-cast body
- ABS plastic baffle
- Diffuser version with 110° beam angle
- Lens version with 10° / 15° / 30° beam angle
- Driver required

| Product code | Version | LED Consumption | Voltage | Lumen | Beam angle | Light temp. | CRI |
|--------------|----------|-----------------|---------|------------|-----------------|-------------|-----|
| 9047161 | Diffuser | 5.3W | 24V DC | 124 lm x 2 | 110° | 3000°K | 80+ |
| A9047161 | Lens | 4.4W | 24V DC | 200 lm x 2 | 10° / 15° / 30° | 3000°K | 90+ |




Diffuser
9047161



Lens
A9047161

LED PENDANT MODULE FOR TRACK

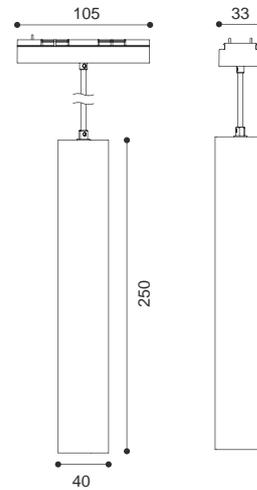


Ø40mm H.250mm

- Aluminium extrusion body
- ABS plastic baffle and lens
- Steel gear box
- Driver required

| Product code | Length | LED Consumption | Voltage | Lumen | Beam angle | Light temp. | CRI |
|--------------|--------|-----------------|---------|--------|------------|-------------|-----|
| 0147161 | - | 6.2W | 24V DC | 626 lm | 10° / 20° | 3000°K | 90+ |



DRIVERS

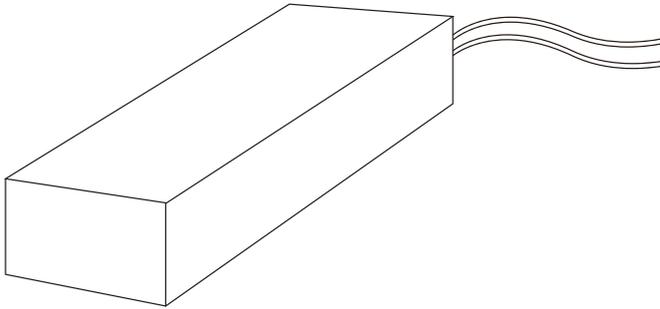

- When using 24VDC driver, maximum length and maximum wattage connection will be 50% of 48DVC version


| Product code | Manufacturer | Description | Power | Voltage |
|--------------|--------------|-----------------------------|-------|---------|
| 10-PDS | Meanwell | HRP-100-48 constant voltage | 100W | 24V DC |
| 20-PDS | Meanwell | HRP-200-48 constant voltage | 200W | 24V DC |
| 30-PDS | Meanwell | HRP-300-48 constant voltage | 300W | 24V DC |

EASY INSTALLATION

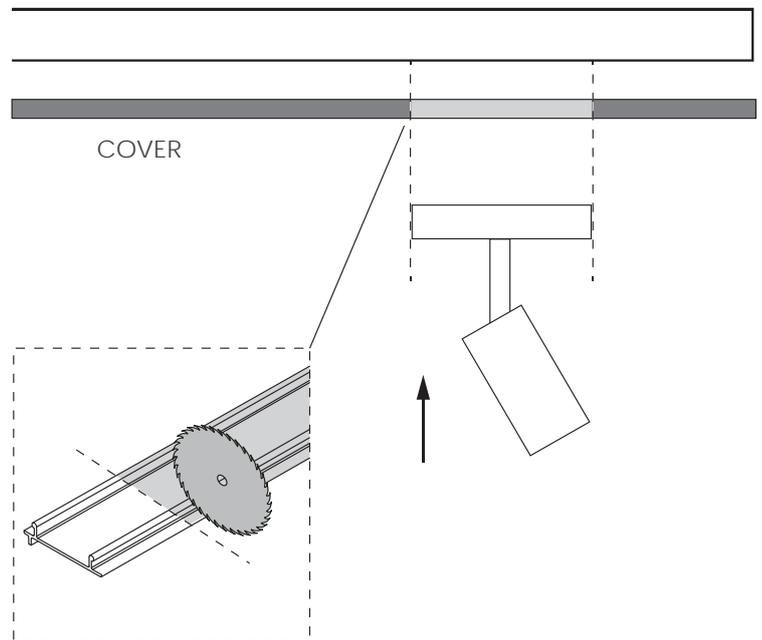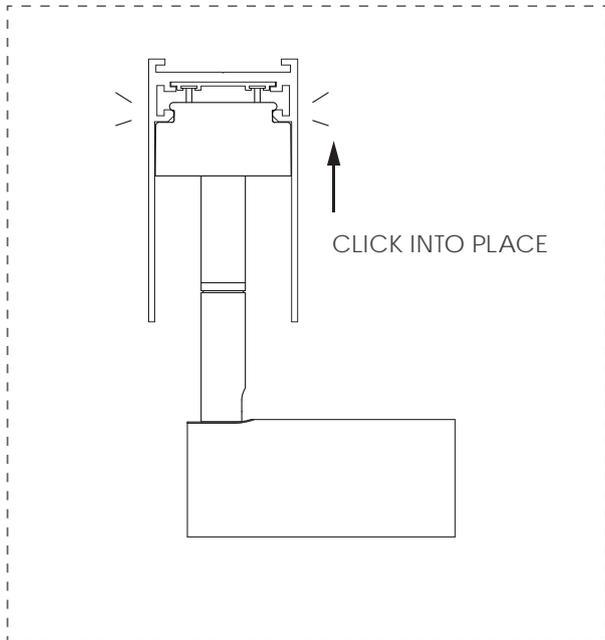


-
- Simple plug and play LED installation
 - Track cover can be trimmed or moved to fit the LED module, creating a seamless appearance
-


CONNECTION OPTIONS

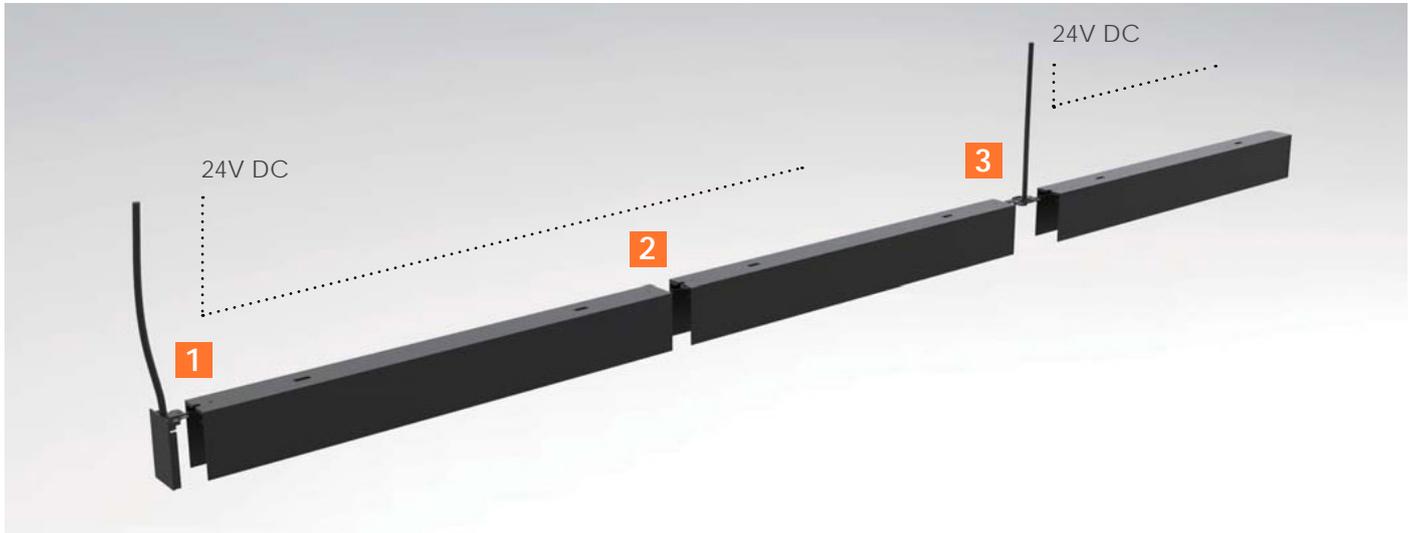


- Various connection options
- Compatible with 48V DC and 24V DC driver




1 Single power, single track

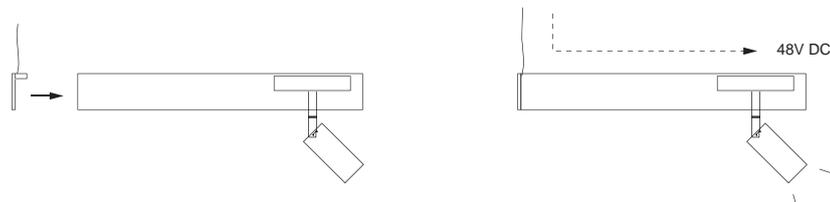


Use power end cap 30-CDS as power feed




2 Single power, multiple tracks

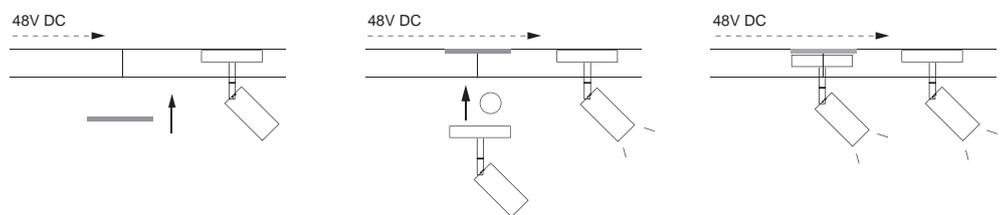

Use the joint 10-CDS to connect the tracks




3 Multiple power, multiple tracks

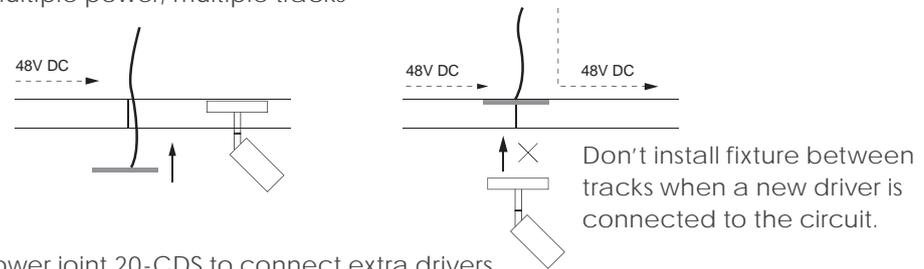


Use power joint 20-CDS to connect extra drivers

INSTALLATION

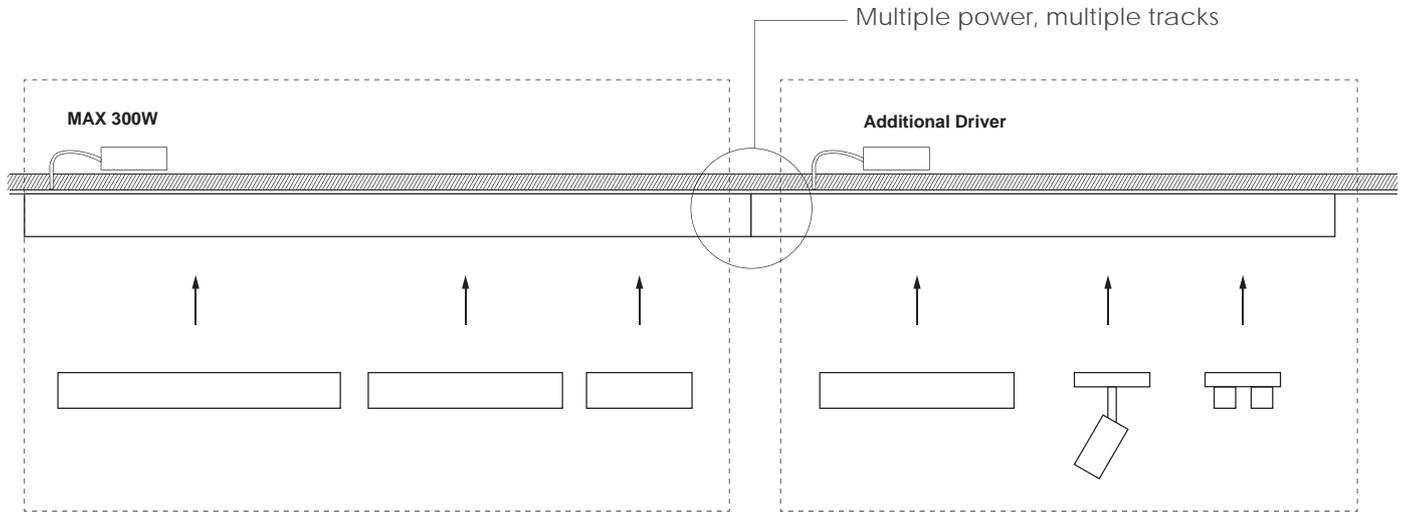

- Continuous lengths of track can be joined, making it a truly flexible solution
- By segregating with multiple drivers separate lighting sections can be created, giving control over lighting different areas.

DRIVER INSTALLATION

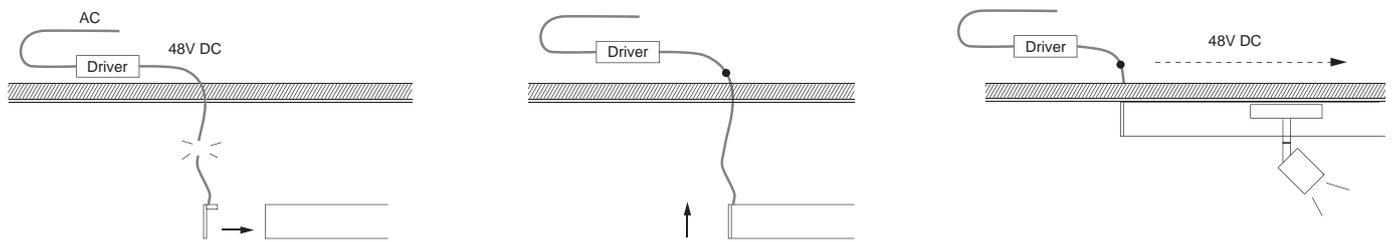

 **01189 889414**

 **enquiries@dld-contract.co.uk**

 **dld-contract.co.uk**

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH