

## CENIS

IP40 CE   

### POTENZA ASSORBITA

*Power Absorption*

Cenis 1: 6W  
Cenis 2: 12W  
Cenis 4: 24W

### ALIMENTAZIONE

*Supply Voltage*

230Vac

### COLLEGAMENTO

*Connection*

Tensione di rete  
*To main voltage*

### DURATA MEDIA LED

*Average LED life*

50.000h

### COLORI LED DISPONIBILI

*LED colours available*

2700K, 3000K, 4000K

### CRI

90

### FASCI DISPONIBILI

*Available Lens*

12°, 28°, 45°

### FLUSSO LUMINOSO

*Luminous Flux*

Cenis 1: 560lm (2700K), 600lm (3000K), 640lm(4000K)  
Cenis 2: 1120lm(2700K), 1200lm (3000K), 1280lm (4000K)  
Cenis 4: 2240lm (2700K), 2400lm (3000K), 2560lm (4000K)

### INSTALLAZIONE

*Installation*

A incasso su cartongesso o legno tramite molle (incluse)

### TEMPERATURA DI ESERCIZIO

*Operating Temperature*

-10+45°C

### CALPESTABILE

*Walk Over*

No

### CARRABILE

*Drive Over*

No

### GRADO DI PROTEZIONE IP

*IP rating*

IP40

### GRADO DI PROTEZIONE IK

*IK rating*

/

### CLASSE DI CONSUMO ENERGETICO

*Energy Efficiency Class*

A/A+/A++

### CLASSE DI ISOLAMENTO

*Insulation Class*

Classe 2

### PROTEZIONE

*Protections*

WP system


### PESO

*Weight*

Cenis 1: 0,27Kg  
Cenis 2: 0,39Kg  
Cenis 4: 0,62Kg



Questo dispositivo è munito di lampade a LED integrate



Le lampade di questo dispositivo non sono sostituibili

874/2012



Incasso IP40 quadrato, per controsoffitto da interno, ideale per l'illuminazione di abitazioni, spazi commerciali, vetrine, corridoi, sale convegni, uffici.

*Recessed square IP40 downlight, for indoor false ceiling applications, ideal for the lighting of residential and commercial areas, shop windows, corridors, meeting rooms, offices.*


100% MADE IN ITALY

LLD Light s.r.l.


Via dell'Edilizia, 100 - 36100 Vicenza

www.lldlight.it - info@lldlight.it

## DIMENSIONI – Dimensions

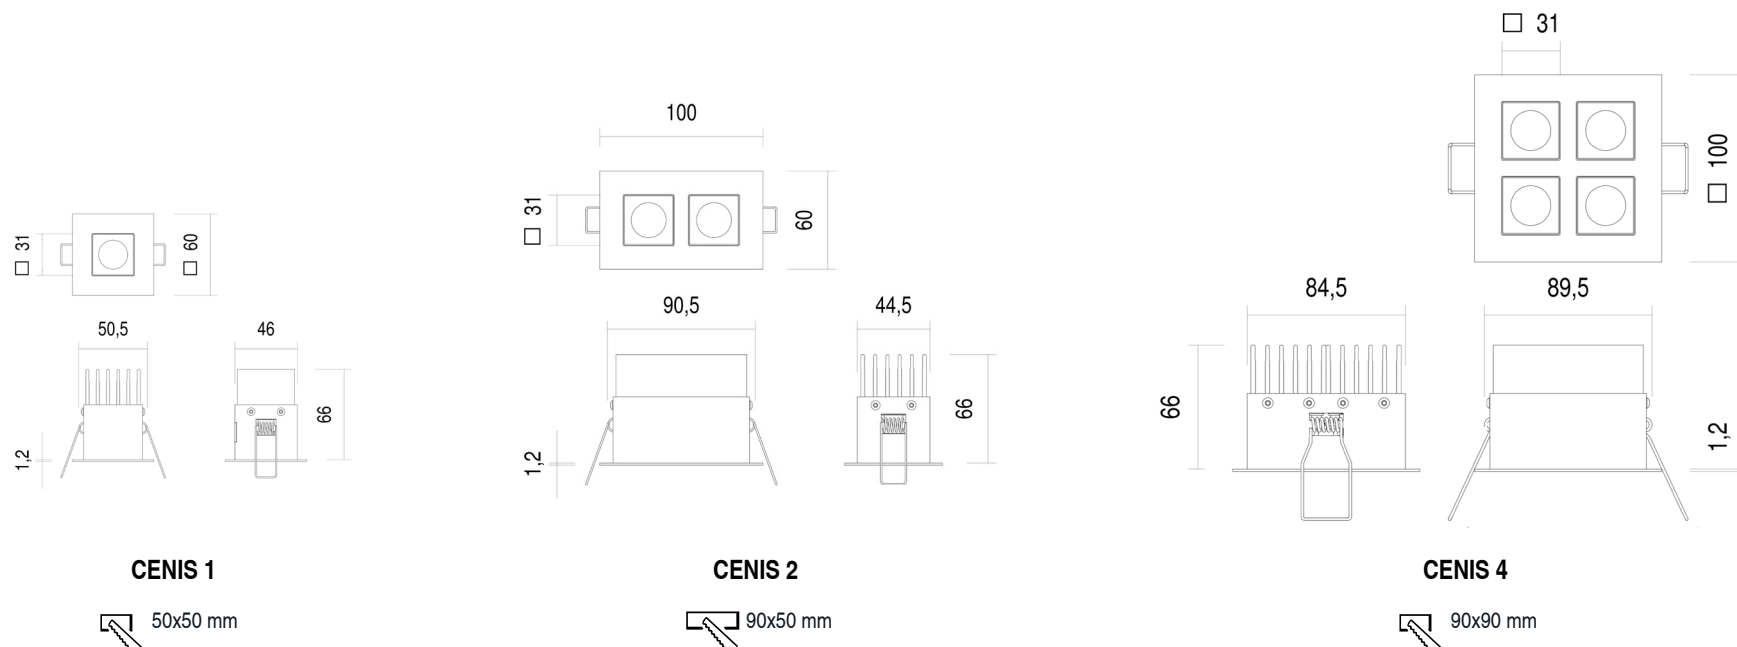

100% MADE IN ITALY



**LLD Light s.r.l.**

Via dell'Edilizia, 100 - 36100 Vicenza  
[www.lldlight.it](http://www.lldlight.it) – [info@lldlight.it](mailto:info@lldlight.it)