



<b>POTENZA ASSORBITA</b> <i>Power Absorption</i>	12W (Versione S) – 18W (versione M) – 25W (versione L) 12W (S version) – 18W (M version) – 25W (L version)
<b>ALIMENTAZIONE</b> <i>Supply Voltage</i>	230Vac
<b>COLLEGAMENTO</b> <i>Connection</i>	Tensione di rete Main voltage
<b>DURATA MEDIA LED</b> <i>Average LED life</i>	50.000h
<b>COLORI LED DISPONIBILI</b> <i>LED colours available</i>	2700K, 3000K, 4000K
<b>CRI</b>	>90
<b>FASCI DISPONIBILI</b> <i>Available Lens</i>	120°
<b>FLUSSO LUMINOSO (REALE)</b> <i>Luminous Flux (Real)</i>	S: 957lm (2700K), 1015lm (3000K), 1087lm (4000K) - M: 1450lm (2700K), 1523lm (3000K), 1631lm (4000K) - L: 1993lm (2700K), 2102lm (3000K), 2283lm (4000K)
<b>INSTALLAZIONE</b> <i>Installation</i>	Frame: A incasso su cartongesso o legno tamite molle incluse / <i>Recessed on plasterboard or wood with springs included</i> A incasso su muratura con cassaforma non inclusa / <i>Recessed on brickwork with housing box not included</i> Minimal: A incasso su cartongesso o legno con cassaforma a rasare non inclusa / <i>Recessed flush-mounting on plasterboard or wood with housing box not included</i>
<b>TEMPERATURA DI ESERCIZIO</b> <i>Operating Temperature</i>	-10+45°C
<b>CALPESTABILE</b> <i>Walk Over</i>	No
<b>CARRABILE</b> <i>Drive Over</i>	No
<b>GRADO DI PROTEZIONE IP</b> <i>IP rating</i>	IP40
<b>GRADO DI PROTEZIONE IK</b> <i>IK rating</i>	/
<b>CLASSE DI CONSUMO ENERGETICO</b> <i>Energy Efficiency Class</i>	A/A+/A++
<b>CLASSE DI ISOLAMENTO</b> <i>Insulation Class</i>	Classe 2 Class 2
<b>PROTEZIONI</b> <i>Protections</i>	/
<b>PESO</b> <i>Weight</i>	Falk Frame S: 0,35Kg - Falk Frame M: 0,7Kg - Falk Frame L: 1,41Kg Falk Minimal S: 0,53Kg - Falk Minimal M: 0,9Kg - Falk Minimal L: 1,8Kg



Le lampade di questo dispositivo non sono sostituibili

874/2012

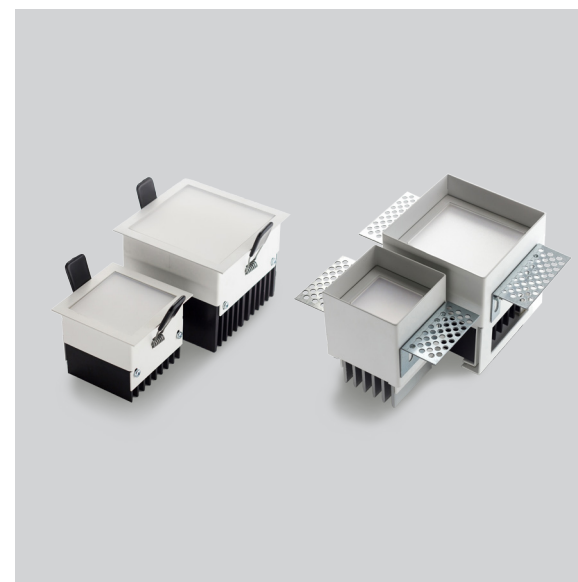


Incasso quadrato con bordo e senza bordo per controsoffitto da interno IP40, ideale per l'illuminazione di abitazioni, spazi commerciali, vetrine, corridoi, sale, convegni, uffici.

*Recessed square trimmed or trimless downlight for indoor applications IP40, ideal for the lighting of residential and commercial lighting, shops, corridors, meeting rooms, offices.*


Corpo in acciaio verniciato, dissipatore in alluminio anodizzato e diffusore in PMMA opalino.

*Varnished steel body, anodized aluminium heatsink and opal PMMA diffuser.*


## DIMENSIONI - Dimensions




 56 x 56 mm  
**Falk Frame - S**

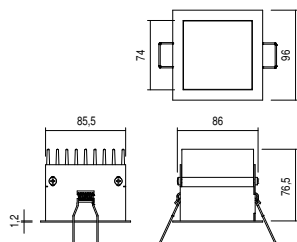


 87 x 87 mm  
**Falk Frame - M**

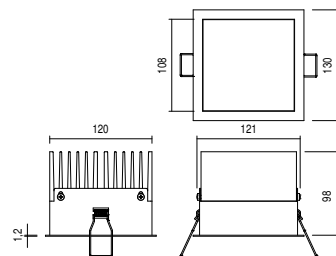


 118 x 118 mm  
**Falk Frame - L**



 66 x 66 mm  
**Falk Minimal - S**




 93 x 93 mm  
**Falk Minimal - M**




 127 x 127 mm  
**Falk Minimal - L**


## ACCESSORI - Accessories





**CMF20**  
Housing box for Falk Frame S





**CMF25**  
Housing box for Falk Frame M

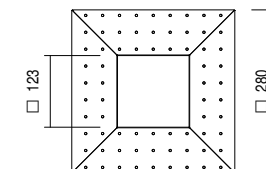



**CMF28**  
Housing box for Falk Frame L

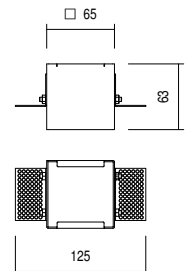

**CAF06**  
Housing box for Falk Minimal S

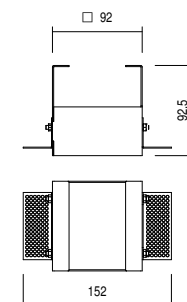

**CAF09**  
Housing box for Falk Minimal M

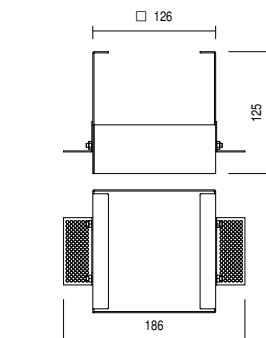

**CAF12**  
Housing box for Falk Minimal L