

ANDES LED 2 PLASTER IN ADJUSTABLE DOWNLIGHT

TRUE COLOUR CRI 98 | IP54

DLD/ANDE2-P-A

DLD
ARCHITECTURAL




DETAILS

Type	Adjustable 24°
IP Rating	IP54
IP Zone	Zone 2
Class	I
Standards	CE
Fire Rated	60+ minutes
Material	Aluminium
Cable	2 Core 0.5mm ²
Cable Length	400mm
Warranty	5 Years


KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Simple access to the light engine for easy maintenance
- Dim to dark with our range of fully tested drivers

DIMENSIONS

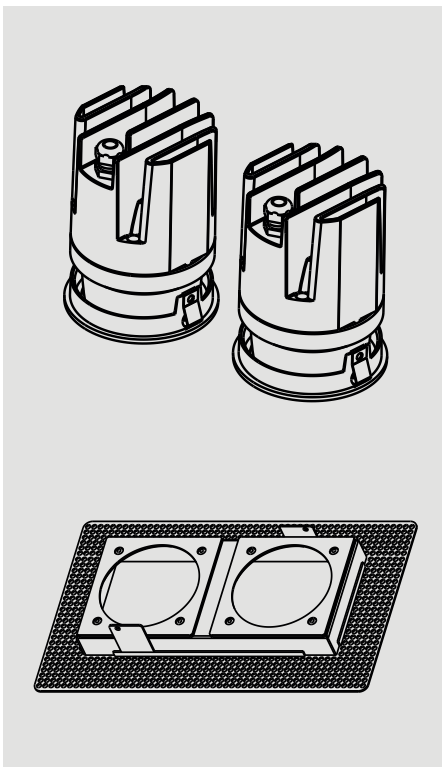

Fitted Dims:	164mm x 76mm
Light Engine:	Ø64mm, H.89mm
Aperture:	Ø35.5mm
Plaster Kit:	214mm x 128mm H.30mm
Total Height:	105mm
Cutout:	168mm x 80mm

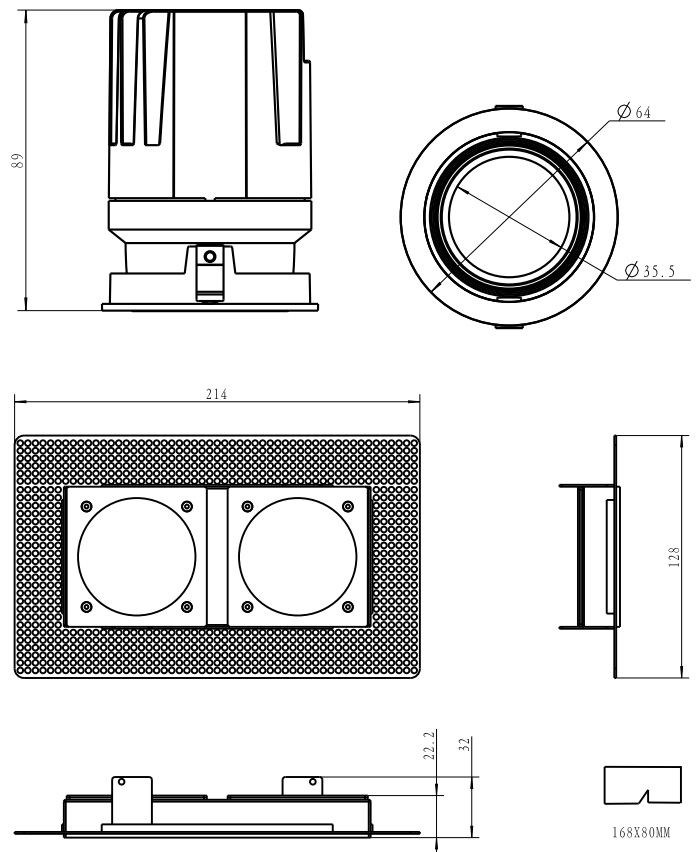

TRUE COLOUR 98

ANDES LED 2 PLASTER IN ADJUSTABLE DOWNLIGHT

TRUE COLOUR CRI 98 | IP54

DLD/ANDE2-P-A

DLD
ARCHITECTURAL

PRODUCT CODE CONSTRUCTION

PRODUCT CODE PREFIX	FINISH	BAFFLE	LIGHT TEMP. CCT	BEAM ANGLE	DRIVER
DLD/ANDE2-P-A	W	B	27K	24D	D
<i>APPLICATION</i> P Plaster In R Recessed	<i>VERSION</i> A Adj. F Fixed	W White B Black G Gold	27K 2700K 30K 3000K 40K 4000K	15D 15° 24D 24° 36D 36°	No driver TRIAC dim. 0-10V dim. DALI dim.

SPECIFICATION

BEAM ANGLE

Delivered lumens*

*(Tc 85°C, +/-7%)

Efficacy Lm/W

15°

available
on
request

24°

available
on
request

36°

955 lm
78 lm/W

CCT

3000K

Binning SDCM (Hot)

CRI

R9

TM30 Rf Rg

2

98

95

Rf 95 Rg 95

LED Type

LED Lifetime (Ave.)

Luminus Gen. 6 CXM-6 COB LED

50,000 hrs

POWER

Wattage

Voltage

Current

2 x 12W

220-240V

2 x 350mA

DRIVER

Supported Protocols

Dim to Dark

Distance from Luminaire

Wiring

Emergency

Mains Dim / TRIAC / 0-10V / DALI / Bluetooth

0.1% Lux

20m maximum

Series

Emergency packs available



01189 889414



sales@darklightdesign.com



darklightdesign.com

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH