## Nautilus,
design by Andrea Tosetto, 2017

Wall

Strong design and leading–edge technology come together in this family of lamps characterised by a convex lens that projects the LED light wherever its needed or most preferred, for a truly efficient and personalised result. Versatile and dynamic, either on the wall, ceiling or suspended in a variety of versions and finishes, Nautilus lamps satisfy a full range of lighting needs, whether functional or purely decorative, in both residential and professional contexts.

Nautilus Wall	Light source	Frame: Aluminium	Diffuser: Aluminium	Code
		Matte White 9010	Matte White 9010	165051
		Chrome	Matte White 9010	165006
	LED	Chrome	Chrome	165008
	• 3000 K	Chrome	Gold	165009
	• 2 × 15W | 2550 lm	Chrome	Rose Gold	165010
	• 220-240V	Matte Black 9005	Matte Black 9005	165052
	• CRI 90	Chrome	Matte Black 9005	165007
	• MacAdam 3-Step	Matte Champagne	Matte Champagne	165053
	LED and driver included			
		Matte White 9010	Matte White 9010	165048
		Chrome	Matte White 9010	165001
	LED	Chrome	Chrome	165003
	• 2700 K	Chrome	Gold	165004
	• 2 × 15W | 2400 lm	Chrome	Rose Gold	165005
	• 220-240V	Matte Black 9005	Matte Black 9005	165049
	• CRI 90	Chrome	Matte Black 9005	165002
	• MacAdam 3-Step	Matte Champagne	Matte Champagne	165050
	LED and driver included			

Net weight: 1.15 kg	Gross weight: 1.63 kg	Parcels: N°1	Volume: 0.008 m³

CE   IP40   EAC   Energy Saving   Dim Triac

LODES

Nautilus Mini		Light source	Frame: Metal	Diffuser: Aluminium	Code
		LED • 2700 K • 2 × 6W | 816 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	● Matte Black 9005	—	165042
			○ Matte White 9010	—	165041
		LED • 3000 K • 2 × 6W | 840 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	○ Matte White 9010	—	165046
			● Matte Black 9005	—	165047

Net weight: 0.75 kg	Gross weight: 0.95 kg	Parcels: N°1	Volume: 0.008 m³

CE EAC IP20 Energy Saving Dim Triac

Polar diagram
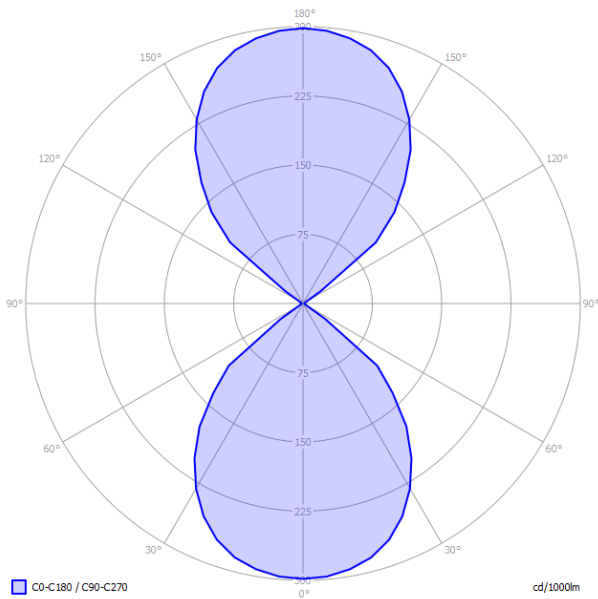
C0-C180 / C90-C270   cd/1000lm

Nautilus Wall

LED
• 3000 K
• 2 × 6W | 840 lm
• 220-240V
• CRI 90
• MacAdam 3-Step

LED and driver included

LED
• 2700 K
• 2 × 6W | 816 lm
• 220-240V
• CRI 90
• MacAdam 3-Step

LED and driver included

Polar diagram

Nautilus Mini
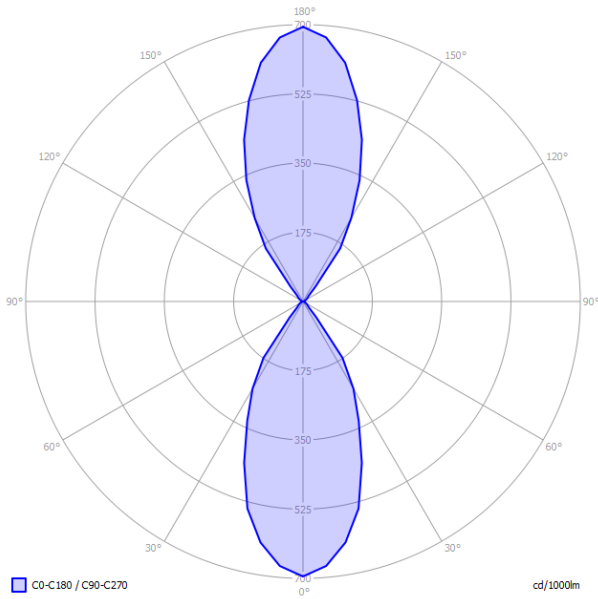
C0-C180 / C90-C270

cd/1000lm

LED
- 3000 K
- 2 × 6W | 840 lm
- 220-240V
- CRI 90
- MacAdam 3-Step

LED and driver included

LED
- 2700 K
- 2 × 6W | 816 lm
- 220-240V
- CRI 90
- MacAdam 3-Step

LED and driver included

Other applications of Nautilus

Ceiling

Suspension