LODES

Nautilus Mini,
*design by* Andrea Tosetto, 2017

Wall

Nautilus is a versatile family of lamps characterised by their distinctly dynamic lighting effects. A strong and contemporary design that expresses all the potential of the LED light through convex glass lenses, which diffuse the direct LED light without any glare. The different versions allow lighting to be personalised in a broad variety of settings, offering a tailored response to the different needs of both residential and professional contexts.

Nautilus Wall	Light source	Frame: Aluminium	Diffuser: Aluminium	Code
	LED • 3000 K • 2 × 15W | 2550 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	Matte White 9010	Matte White 9010	165051
		Chrome	Matte White 9010	165006
		Chrome	Chrome	165008
		Chrome	Gold	165009
		Chrome	Rose Gold	165010
		Matte Black 9005	Matte Black 9005	165052
		Chrome	Matte Black 9005	165007
		Matte Champagne	Matte Champagne	165053
	LED • 2700 K • 2 × 15W | 2400 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	Matte White 9010	Matte White 9010	165048
		Chrome	Matte White 9010	165001
		Chrome	Chrome	165003
		Chrome	Gold	165004
		Chrome	Rose Gold	165005
		Matte Black 9005	Matte Black 9005	165049
		Chrome	Matte Black 9005	165002
		Matte Champagne	Matte Champagne	165050

Net weight: 1.15 kg	Gross weight: 1.63 kg	Parcels: N°1	Volume: 0.008 m³

CE   IP40   EAC   Energy Saving   Dim Triac

LODES

Nautilus Mini	Light source	Frame: Metal	Diffuser: Aluminium	Code
	LED • 2700 K • 2 × 6W | 816 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	● Matte Black 9005	—	165042
		● Matte White 9010	—	165041
	LED • 3000 K • 2 × 6W | 840 lm • 220-240V • CRI 90 • MacAdam 3-Step LED and driver included	● Matte White 9010	—	165046
		● Matte Black 9005	—	165047

Net weight: 0.75 kg	Gross weight: 0.95 kg	Parcels: N°1	Volume: 0.008 m³

CE   EAC   IP20   Energy Saving ⬘   Dim Triac ◉

Polar diagram
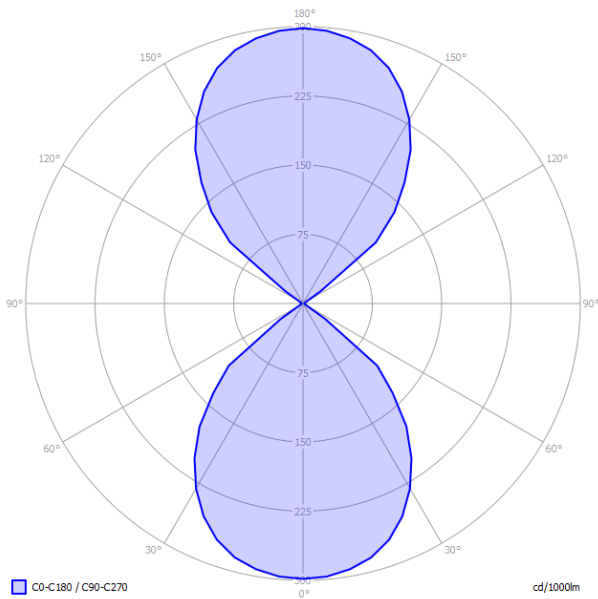
C0-C180 / C90-C270   cd/1000lm

Nautilus Wall

LED
• 3000 K
• 2 × 6W | 840 lm
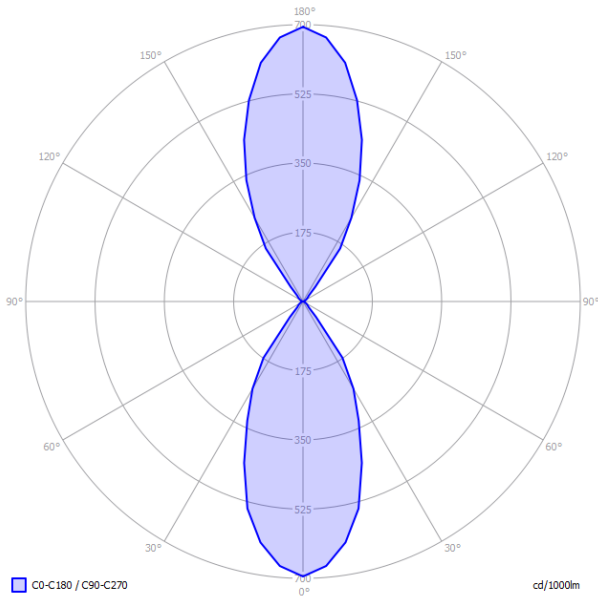• 220-240V
• CRI 90
• MacAdam 3-Step

LED and driver included

LED
• 2700 K
• 2 × 6W | 816 lm
• 220-240V
• CRI 90
• MacAdam 3-Step

LED and driver included

LODES

Polar diagram

Nautilus Mini

C0-C180 / C90-C270

cd/1000lm

LED
- 3000 K
- 2 × 6W | 840 lm
- 220-240V
- CRI 90
- MacAdam 3-Step

LED and driver included

LED
- 2700 K
- 2 × 6W | 816 lm
- 220-240V
- CRI 90
- MacAdam 3-Step

LED and driver included