

Wood Square LED 60 - 600



Anti-static and anti-bacteria natural wood housing

Visual comfort with Dark Light reflector system

Harmonious distribution of light due to rectangular light footprint

Direct light distribution


Supports our biologic clock by changing the color temperature according to daytime (optional)

Flame retardant according to DIN 4102 B1 and EN 13501-1 (optional)



Installation:	Suspended
Optic:	Dark Light Reflector 80°
Light distribution:	Direct
Driver:	FIX, DALI, Bluetooth® (inside ceiling)
Materials:	Housing - natural solid wood Reflector - polycarbonate
Wood type:	Ash, Oak, American Walnut
Weight:	2 kg
Lifetime:	L80B10 60.000 hours
Ambient temperature:	0 / +35° C

Dimensions:

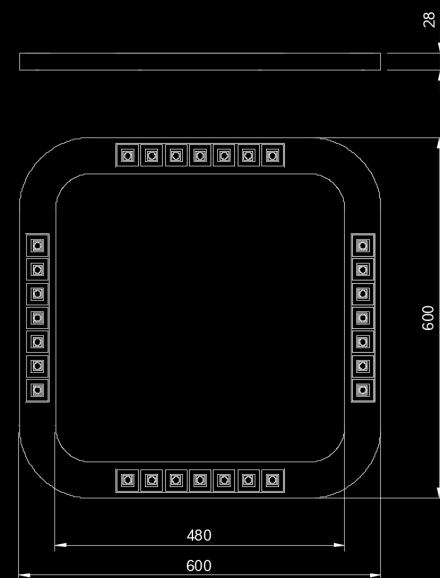

Code	Power	CRI	CCT	Lumen
WS60-600	27 W	> 90	3000 K	3480 lm
WS60-600	27 W	> 90	4000 K	3630 lm
WS60-600	28 W	> 90	TW (2700 - 6500 K)	3480 lm

Tolerance of light output and color temperature: +/- 10%

Order example:

WLS60-600	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	OPTION
WLS60-600	-	27	-	930	-	80	-	OAK	-	FIX	-	XYZ

We reserve the right to change product specifications without prior information