

Wood Freestanding LED



Anti-static and anti-bacteria natural wood housing

Visual comfort with Dark Light reflector system

Harmonious distribution of light with rectangular direct and wide beam indirect illumination


Supports our biologic clock by changing the color temperature according to daytime (optional)

Flame retardant according to DIN 4102 B1 and EN 13501-1 (optional)



Installation:	Freestanding
Optic:	Dark Light Reflector 80°
Light distribution:	Direct (40%) / indirect (60%)
Driver:	FIX, DALI, Bluetooth® (inside luminaire)
Materials:	Housing - natural solid wood Reflector - polycarbonate
Wood type:	Ash, Oak, American Walnut
Weight:	6,8 kg
Lifetime:	L80B10 60.000 hours
Ambient temperature:	0 / +35° C

Dimensions: Height 1900 mm

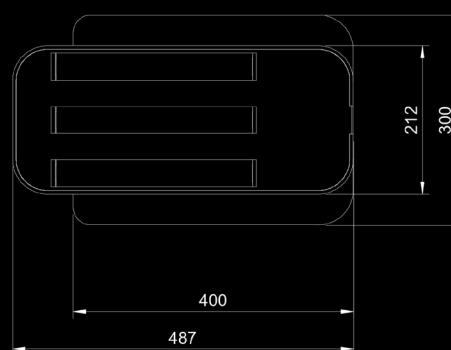

Code	Power	CRI	CCT	Lumen
WFS	45 W	> 90	3000 K	5800 lm
WFS	45 W	> 90	4000 K	6050 lm
WFS	46 W	> 90	TW (2700 - 6500 K)	5530 lm

Tolerance of light output and color temperature: +/- 10%

Order example:

WFS	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	OPTION
WFS	-	45	-	930	-	80	-	OAK	-	FIX	-	XYZ

We reserve the right to change product specifications without prior information