


Wood Ring LED 70 -1200

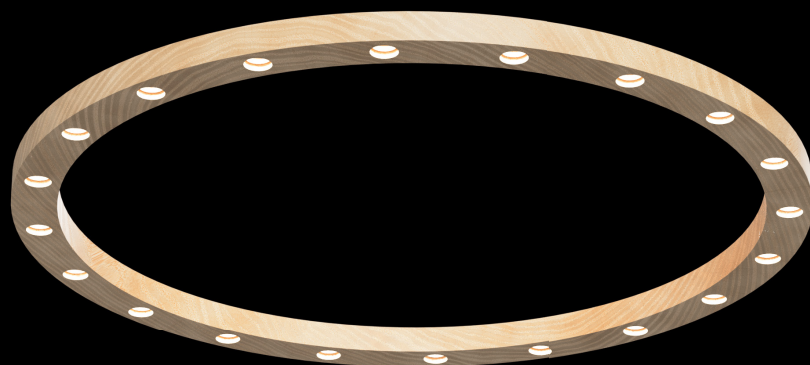

Anti-static and anti-bacteria natural wood housing


Visual comfort with recessed lens system and milled light chambers

Flame retardant according to DIN 4102 B1 and EN 13501-1 (optional)



Installation:	Suspended
Optic:	Lens and milled chambers 60°
Light distribution:	Direct
Driver:	FIX, DALI, Bluetooth® (inside ceiling)
Materials:	Housing - natural solid wood Lens - polycarbonate
Wood type:	Ash, Oak, American Walnut
Weight:	6,2 kg
Lifetime:	L80B10 60.000 hours
Ambient temperature:	0 / +35° C

Dimensions:

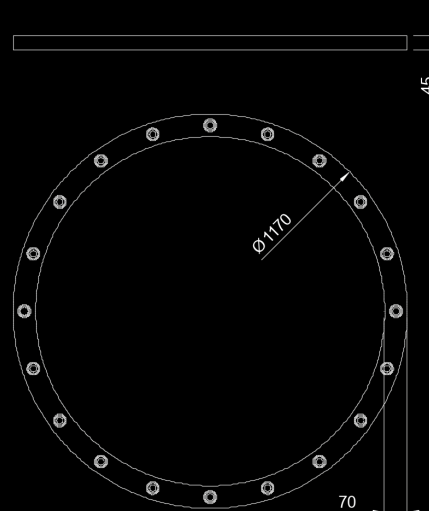

Code	Power	CRI	CCT	Lumen
WRI70-1200	70 W	> 90	3000 K	7800 lm
WRI70-1200	70 W	> 95	3200 K	7600 lm
WRI70-1200	70 W	> 90	4000 K	8000 lm

Tolerance of light output and color temperature: +/- 10%

Order example:

WRI70-1200	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	OPTION
WRI70-1200	-	70	-	930	-	60	-	OAK	-	FIX	-	XYZ

We reserve the right to change product specifications without prior information