

Wood Decagon LED 60-1500



Anti-static and anti-bacteria natural wood housing

Visual comfort with Dark Light reflector system

Harmonious distribution of light due to rectangular light footprint


Supports our biologic clock by changing the color temperature according to daytime (optional)

Flame retardant according to DIN 4102 B1 and EN 13501-1 (optional)



Installation:	Suspended
Optic:	Dark Light Reflector 80°
Light distribution:	Direct
Driver:	FIX, DALI, Bluetooth® (inside ceiling)
Materials:	Housing - natural solid wood Reflector - polycarbonate
Wood type:	Ash, Oak, American Walnut
Weight:	6,2 kg
Lifetime:	L80B10 60.000 hours
Ambient temperature:	0 / +35° C

Dimensions:

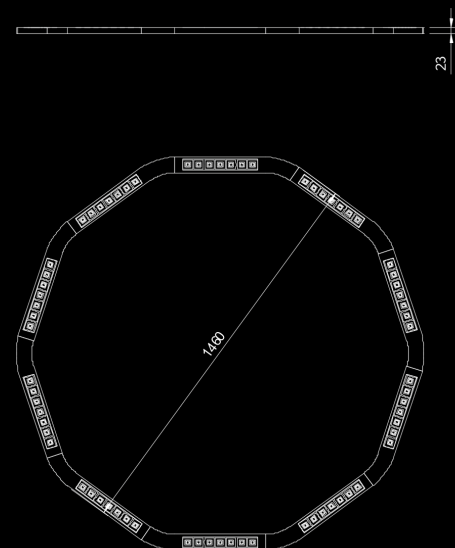

Code	Power	CRI	CCT	Lumen
WDG60-1500	126 W	> 90	3000 K	15480 lm
WDG60-1500	126 W	> 90	4000 K	16110 lm
WDG60-1500	70 W	> 90	TW (2700 - 6500 K)	8300 lm

Tolerance of light output and color temperature: +/- 10%

Order example:

WDG60-1500	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	OPTION
WDG60-1500	-	126	-	930	-	80	-	OAK	-	FIX	-	XYZ

We reserve the right to change product specifications without prior information