

# ELLISSE PENDANT MAJOR

*Federico Palazzari*


Collection of LED pendants, floor/wall lamps available in different versions: major, minor, double, triple and mega provides a direct or indirect diffused light.

In extruded aluminum in different versions: matt lacquered in the finishes, white, black and gold, natural polished and gold polished anodized.

Equipped with an opal diffuser.

The lamps are made using a proprietary extrusion coupling technology.

Ellisse Major is also available as floor or wall versions and is provided with a black marble base or a wall hook accessory.

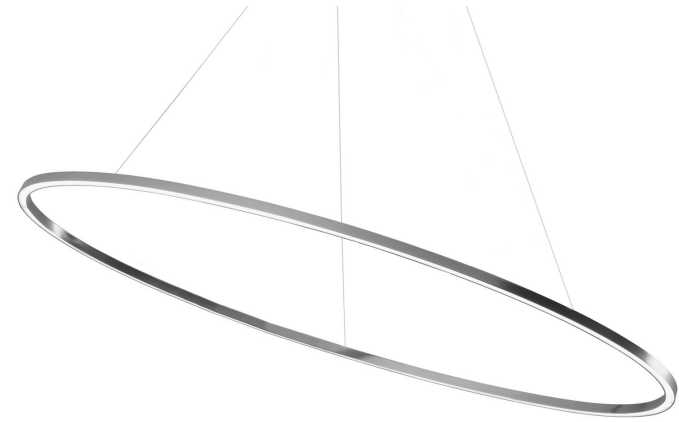

## DOWNLIGHT 2700K

---

### LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

### Codes

ELP LW2 54  
ELP LN2 54  
ELP LO2 54  
ELP LL2 54  
ELP LGW 54


### Structure/Diffuser

white/white  
black/white  
gold painted/white  
polished aluminium/white  
gold polished anodized/white

### PACKAGE

Package 01 Dimension: 15x80x150 cm / Gross weight: 7,5 kg

### Certificazioni

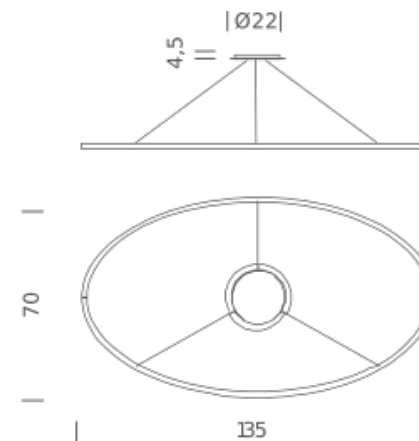

## DOWNLIGHT 3000K

---

### LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

### Codes

ELP LWW 54  
ELP LNW 54  
ELP LOW 54  
ELP LLW 54


### Structure/Diffuser

white/white  
black/white  
gold painted/white  
polished aluminium/white

### PACKAGE

Package 01 Dimension: 15x80x150 cm / Gross weight: 7,5 kg

### Certificazioni

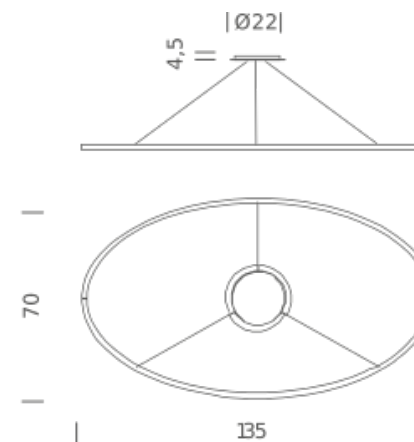

# UPLIGHT 2700K

## LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	2700K
Luminous flux	3450lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

## Codes

ELP LW2 53	white/white
ELP LN2 53	black/white
ELP LO2 53	gold painted/white
ELP LL2 53	polished aluminium/white
ELP LGW 53	gold polished anodized/white


## Structure/Diffuser

white/white
black/white
gold painted/white
polished aluminium/white
gold polished anodized/white

## PACKAGE

Package 01	Dimension: 15x80x150 cm / Gross weight: 7,5 kg
------------	--

## Certificazioni

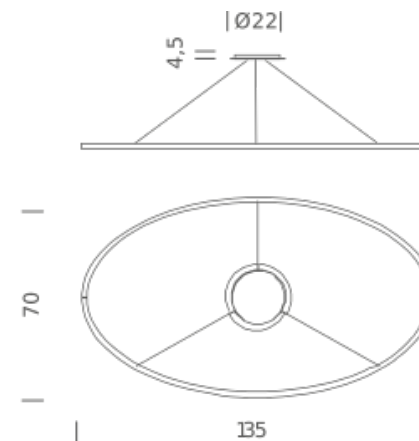

# UPLIGHT 3000K

## LAMPING

Source	linear LED
Total power	66W
Emission	diffused orientable
Switching	dimnable 1-10V
Tension	110/240V
Color temperature	3000K
Luminous flux	3450lm
Typ cri	85
Energy class	A+
Materials	Aluminium
Notes	adjustable cable length from 2,5m to 0,4m, DALI version on request

## Codes

ELP LWW 53  
ELP LNW 53  
ELP LOW 53  
ELP LLW 53

## Structure/Diffuser

white/white  
black/white  
gold painted/white  
polished aluminium/white

## PACKAGE

Package 01 Dimension: 15x80x150 cm / Gross weight: 7,5 kg

## Certificazioni

