

# Wood Linear LED 70



Anti-static and anti-bacteria natural wood housing

Visual comfort with Dark Light reflector system

Harmonious distribution of light due to rectangular light footprint

Direct and indirect light distribution


Supports our biologic clock by changing the color temperature according to daytime (optional)

Flame retardant according to DIN 4102 B1 and EN 13501-1 (optional)



<b>Installation:</b>	Suspended
<b>Optic:</b>	Dark Light Reflector 80°
<b>Light distribution:</b>	Direct (66%) / indirect (34%)
<b>Driver:</b>	FIX, DALI, Bluetooth® (build in)
<b>Materials:</b>	Housing - natural solid wood Reflector - polycarbonate
<b>Wood type:</b>	Ash, Oak, American Walnut
<b>Weight:</b>	1,9 kg
<b>Lifetime:</b>	L80B10 60.000 hours
<b>Ambient temperature:</b>	0 / +35° C

Dimensions:

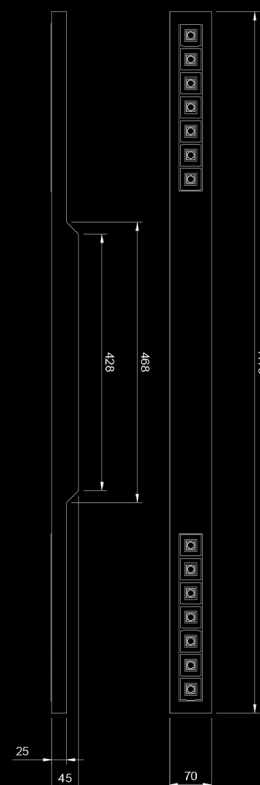

Code	Power	CRI	CCT	Lumen
WL70DI	32 W	> 90	3000 K	4060 lm
WL70DI	32 W	> 90	4000 K	4230 lm
WL70DI	33 W	> 90	TW (2700 - 6500 K)	3870 lm

Tolerance of light output and color temperature: +/- 10%

Order example:

WL70DI	-	Power	-	CRI / CCT	-	Beam	-	Wood	-	Driver	-	OPTION
WL70DI	-	32	-	930	-	80	-	OAK	-	FIX	-	XYZ

We reserve the right to change product specifications without prior information