

ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver included



2X1M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 74W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 110/240V |
| Color temperature | 2700K |
| Luminous flux | 4282lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A20G15DBO
BZRO16A20G15DNE
BZRO16A20G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

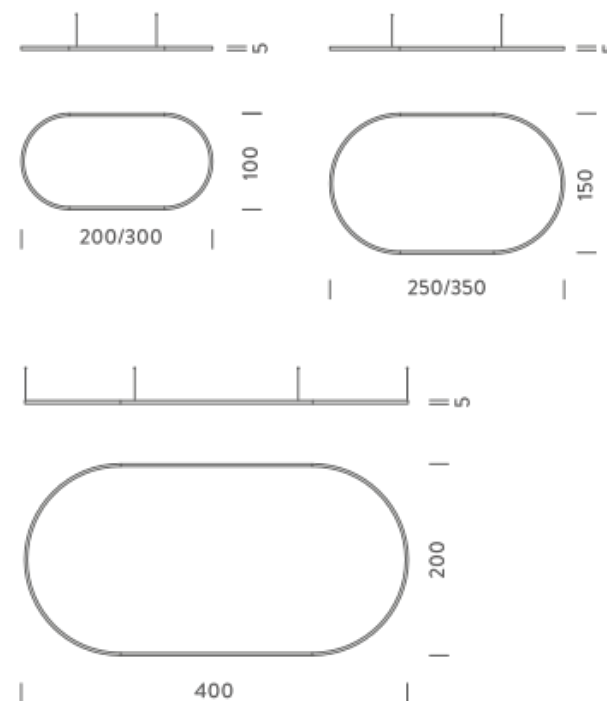

2X1M | UP - DOWNLIGHT -2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 8563lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes |
| Customization options | |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A20G15DBO
BZRO17A20G15DNE
BZRO17A20G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

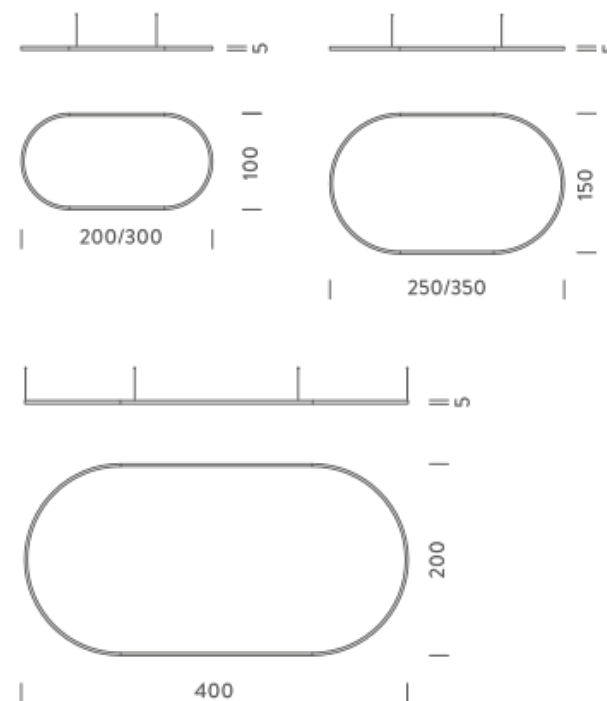

2X1M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 74W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 110/240V |
| Color temperature | 3000K |
| Luminous flux | 4533lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A20G15WBO
BZRO16A20G15WNE
BZRO16A20G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

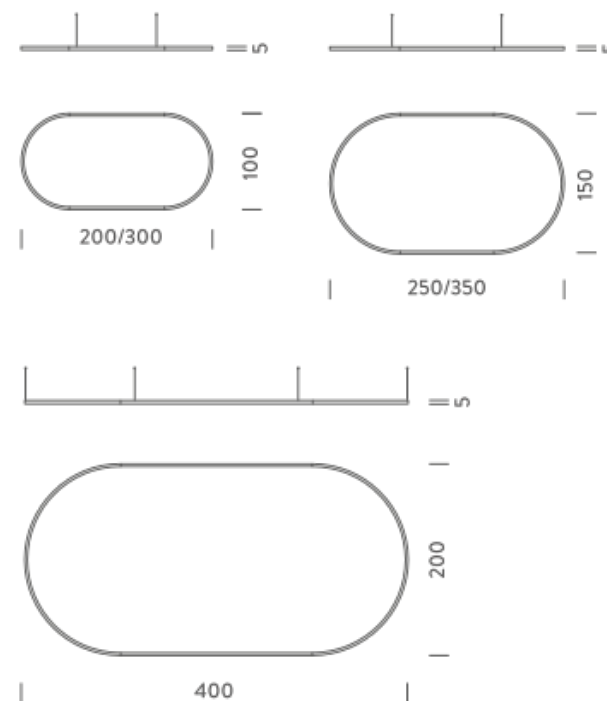

2X1M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 9067lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes |
| Customization options | |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A20G15WBO
BZRO17A20G15WNE
BZRO17A20G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

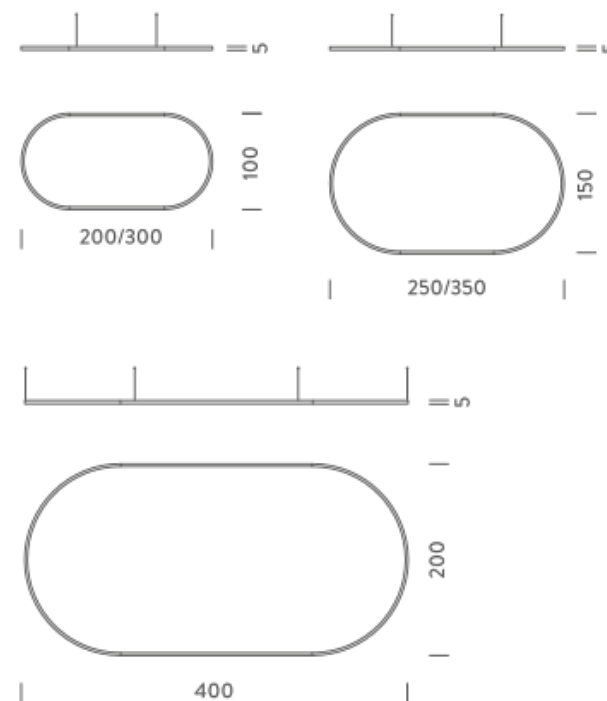

2X1M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 74W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 110/240V |
| Color temperature | 4000K |
| Luminous flux | 5037lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A20G15NBO
BZRO16A20G15NNE
BZRO16A20G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

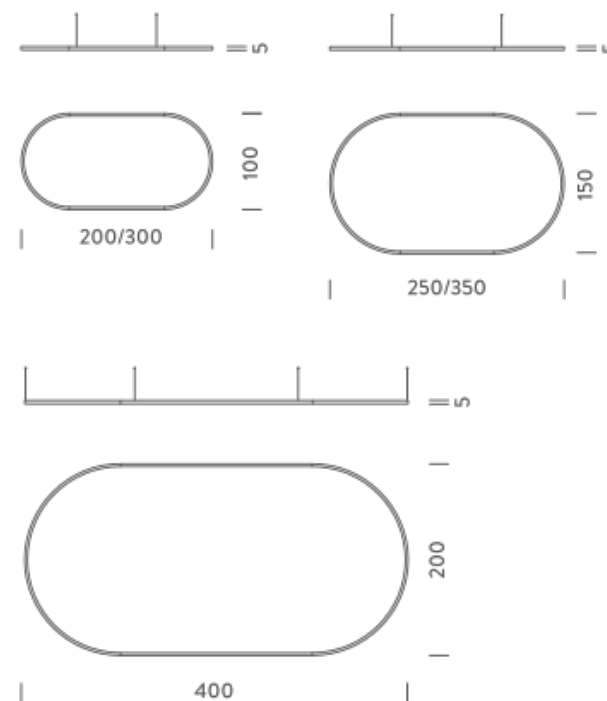

2X1M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 10074lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 200x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes |
| Customization options | |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A20G15NBO
BZRO17A20G15NNE
BZRO17A20G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

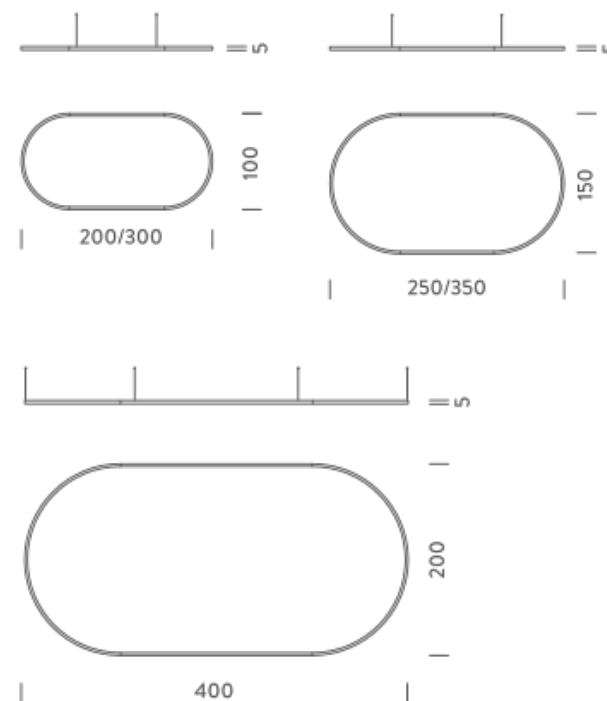

3X1M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 103W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 5948lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A30G15DBO
BZRO16A30G15DNE
BZRO16A30G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

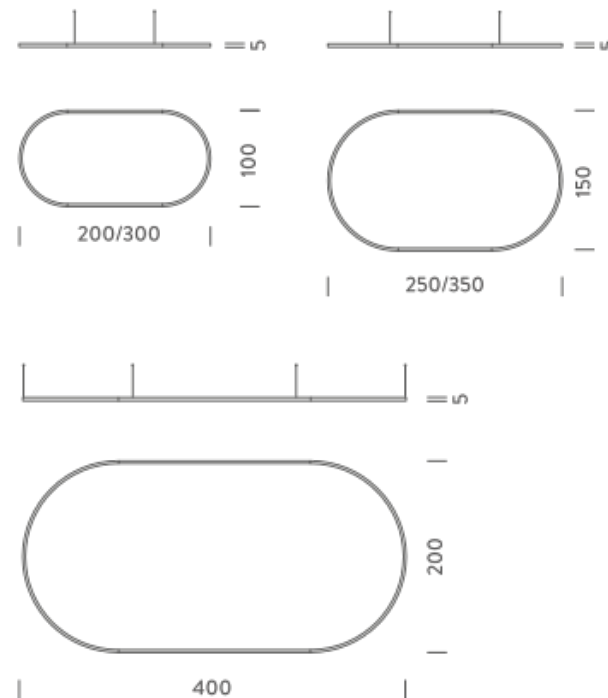

3X1M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 206W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 11895lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes |
| Customization options | |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A30G15DBO
BZRO17A30G15DNE
BZRO17A30G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

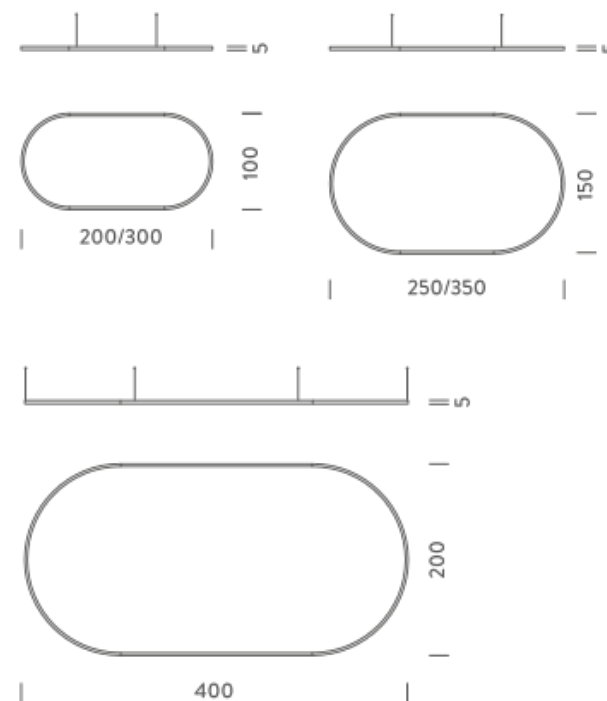

3X1M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 103W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 6297lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A30G15WBO
BZRO16A30G15WNE
BZRO16A30G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

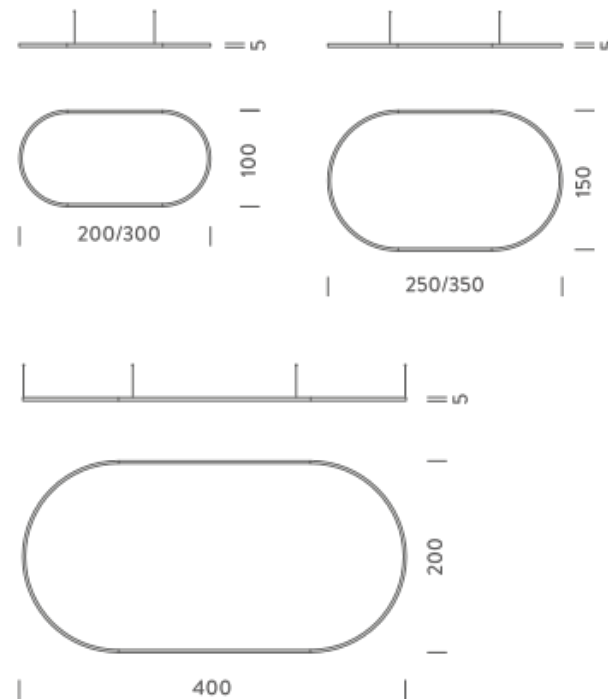

3X1M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 206W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 12595lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes |
| Customization options | |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A30G15WBO
BZRO17A30G15WNE
BZRO17A30G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

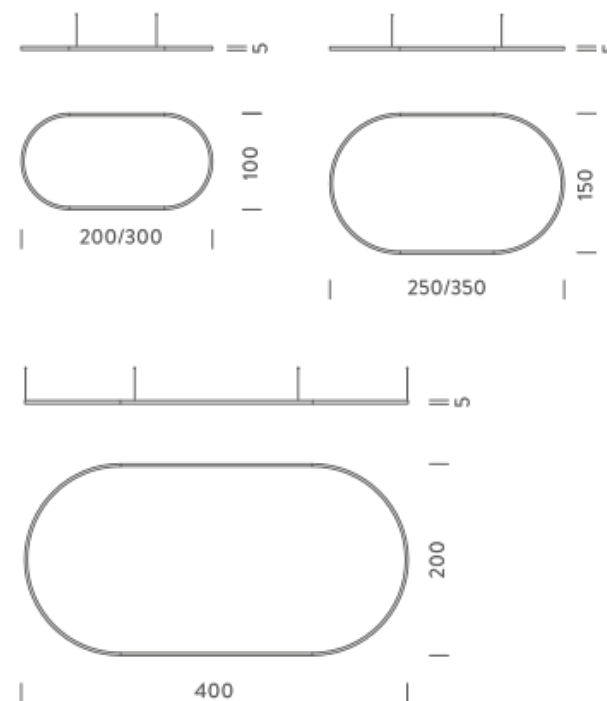

3X1M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 103W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 6997lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16A30G15NBO
BZRO16A30G15NNE
BZRO16A30G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 310x100x15 cm

Certificazioni

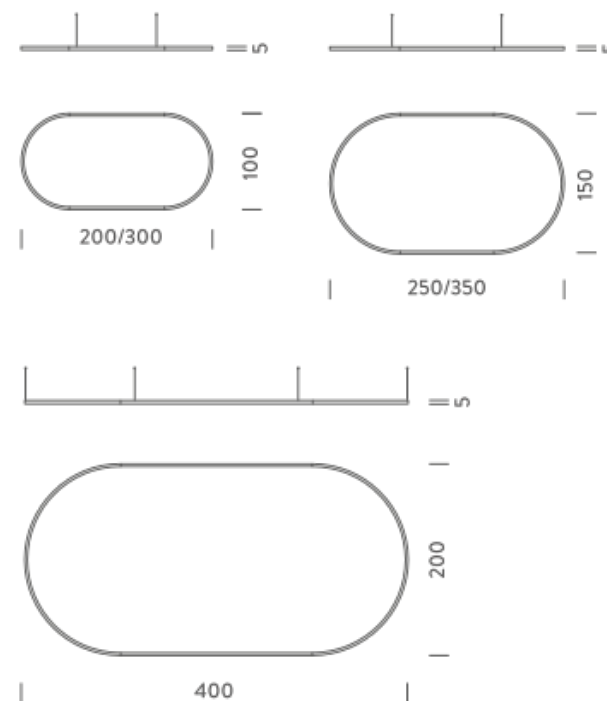

3X1M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 206W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 13994lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 300x100x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 2 electrical cables Ceiling plate, for false ceiling |

Codes

BZRO17A30G15NBO
BZRO17A30G15NNE
BZRO17A30G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

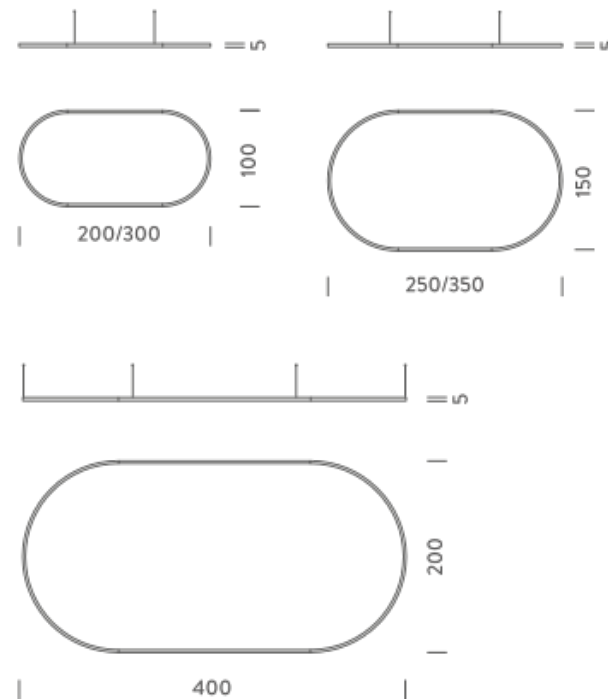

2,5X1,5M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 97W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 5589lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B25G15DBO
BZRO16B25G15DNE
BZRO16B25G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

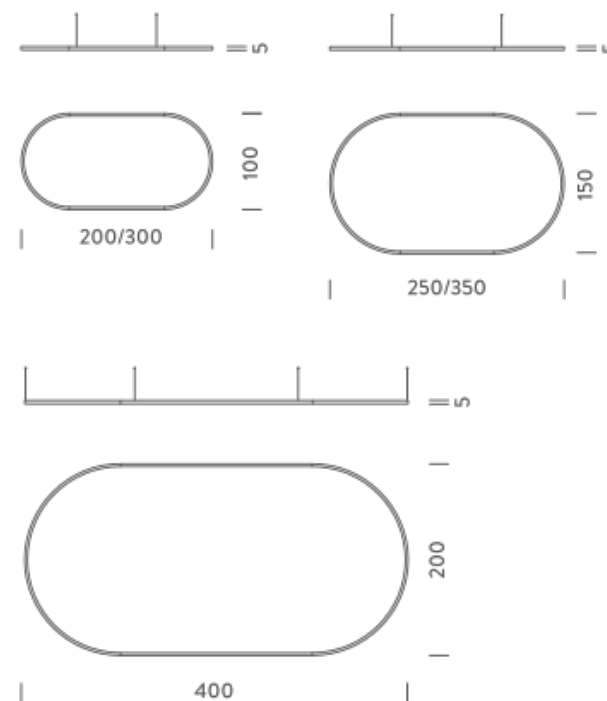

2,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 193W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 11179lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B25G15DBO
BZRO17B25G15DNE
BZRO17B25G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

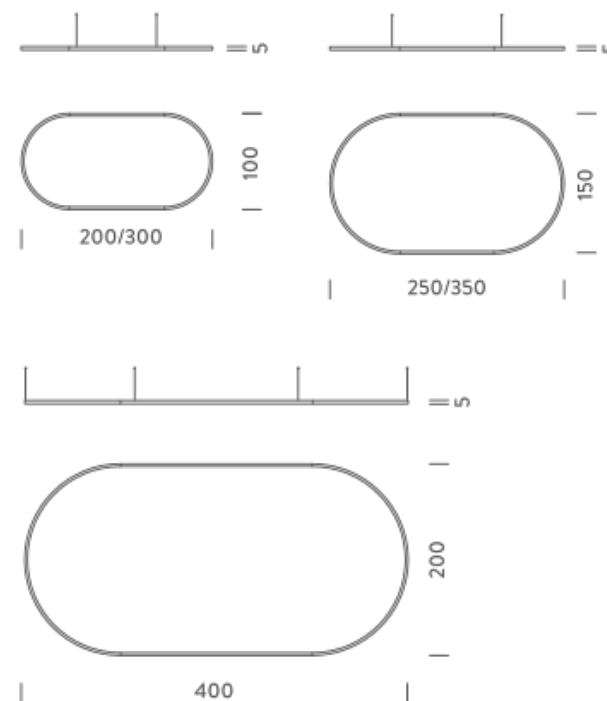

2,5X1,5M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 97W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 5918lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B25G15WBO
BZRO16B25G15WNE
BZRO16B25G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

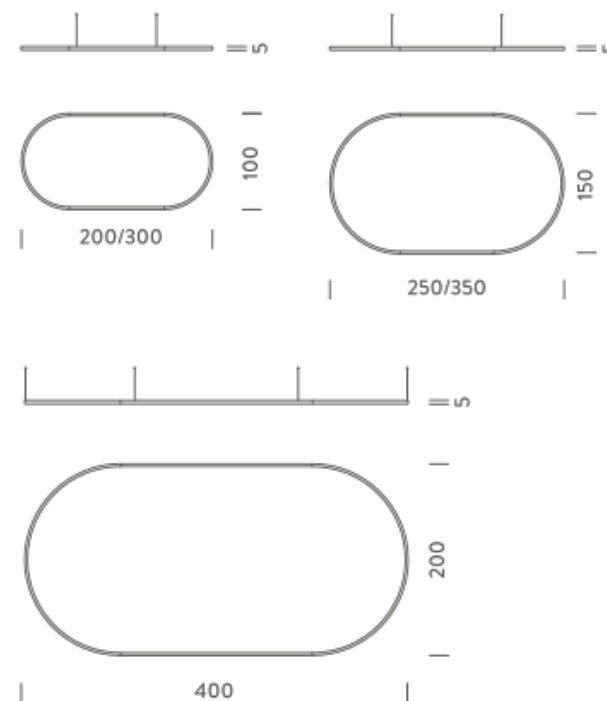

2,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 193W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 11836lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B25G15WBO
BZRO17B25G15WNE
BZRO17B25G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

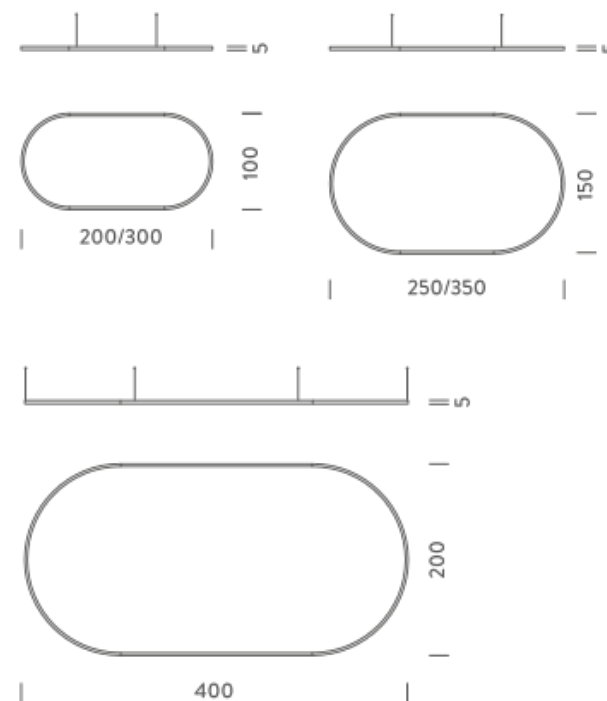

2,5X1,5M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 97W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 6576lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B25G15NBO
BZRO16B25G15NNE
BZRO16B25G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

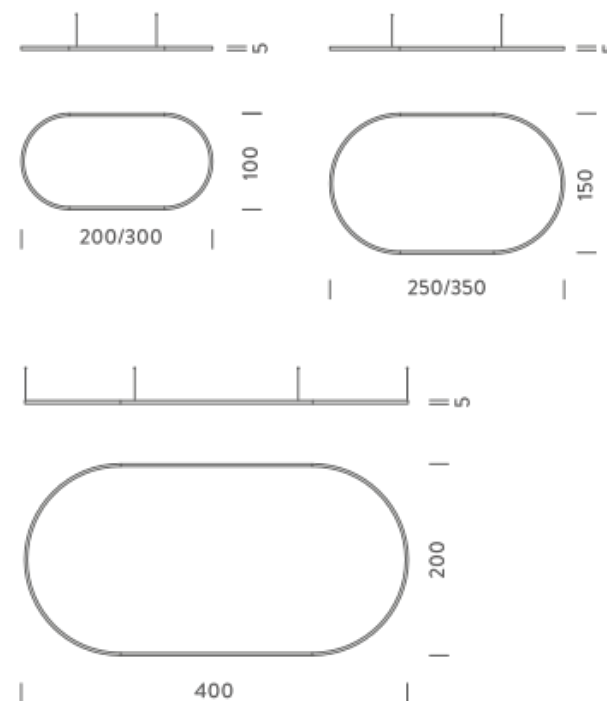

2,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 193W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 13152lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 250x250x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B25G15NBO
BZRO17B25G15NNE
BZRO17B25G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

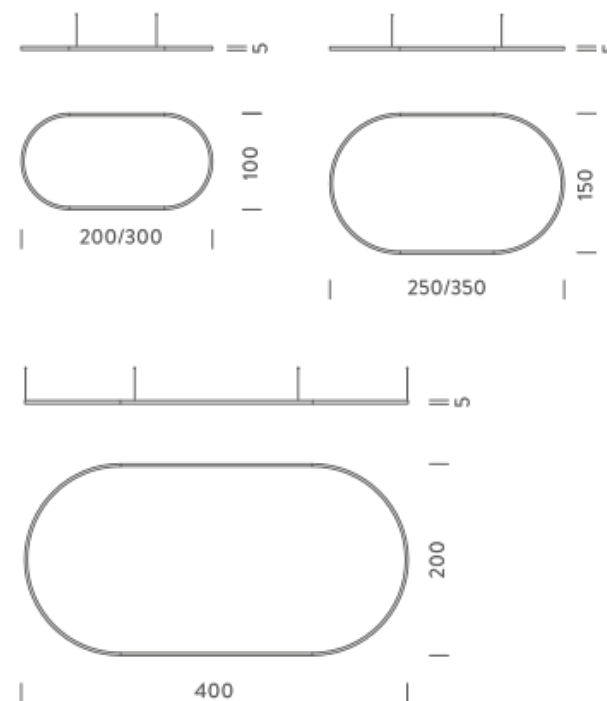

3,5X1,5M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 125W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 7255lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B35G15DBO
BZRO16B35G15DNE
BZRO16B35G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

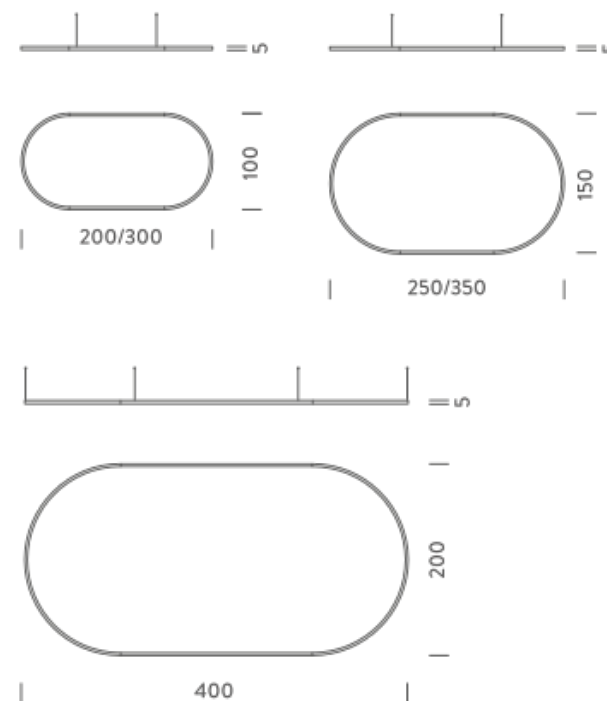

3,5X1,5M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 251W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 1451lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B35G15DBO
BZRO17B35G15DNE
BZRO17B35G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

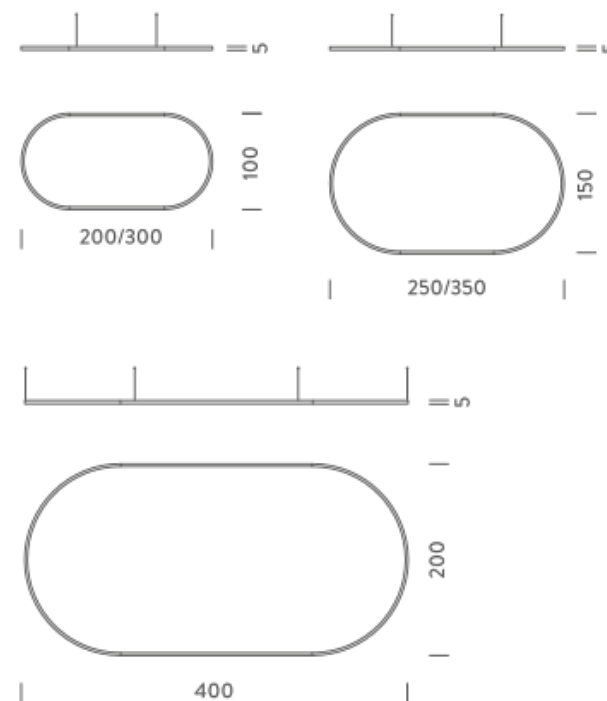

3,5X1,5M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 125W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 7682lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B35G15WBO
BZRO16B35G15WNE
BZRO16B35G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

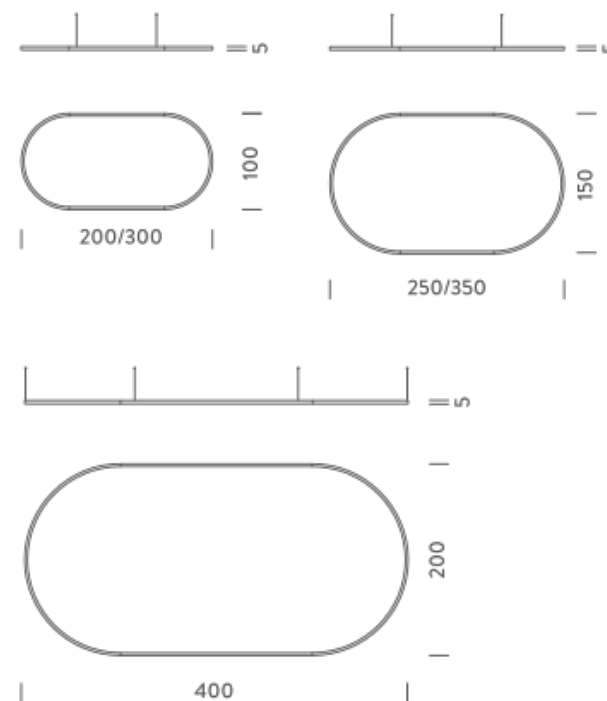

3,5X1,5M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 251W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 15364lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B35G15WBO
BZRO17B35G15WNE
BZRO17B35G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

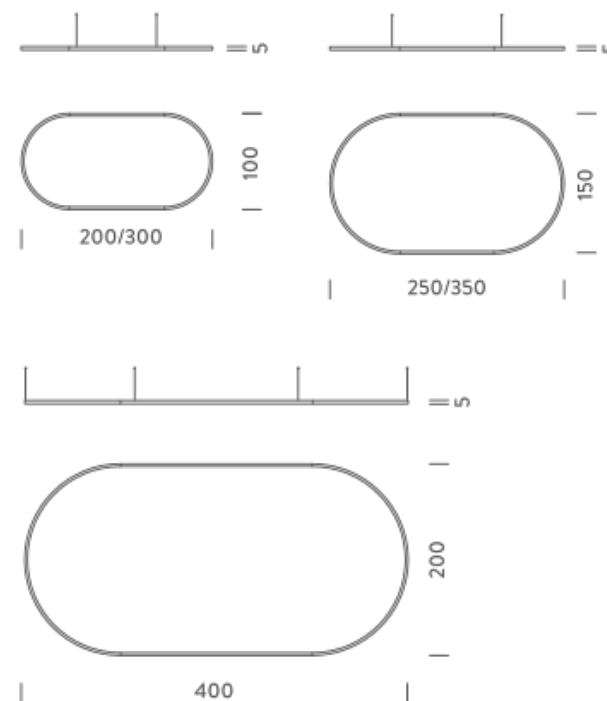

3,5X1,5M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|---|
| Source | Linear LED |
| Total power | 125W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 8536lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Canopy box, 1 driver, 1 electrical cable Ceiling plate, for false ceiling |

Codes

BZRO16B35G15NBO
BZRO16B35G15NNE
BZRO16B35G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

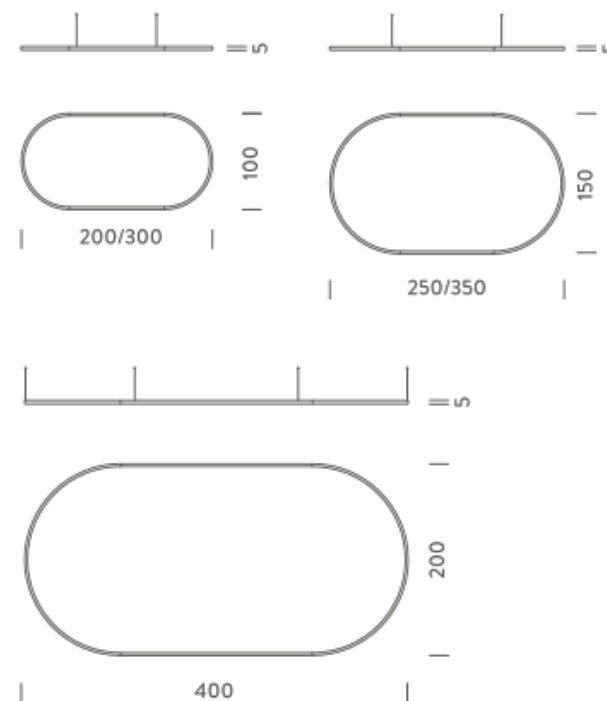

3,5X1,5M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 251W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 17072lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 350x150x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17B35G15NBO
BZRO17B35G15NNE
BZRO17B35G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

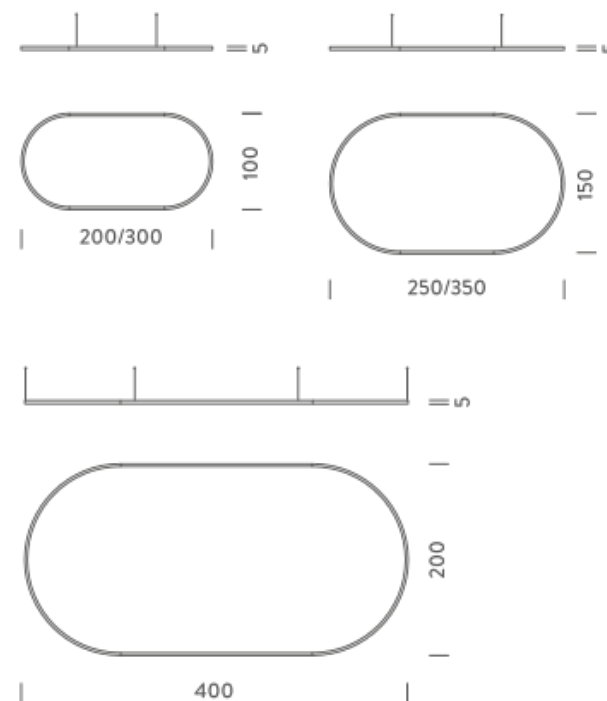

4X2M | DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 8536lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO16C40G15DBO
BZRO16C40G15DNE
BZRO16C40G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

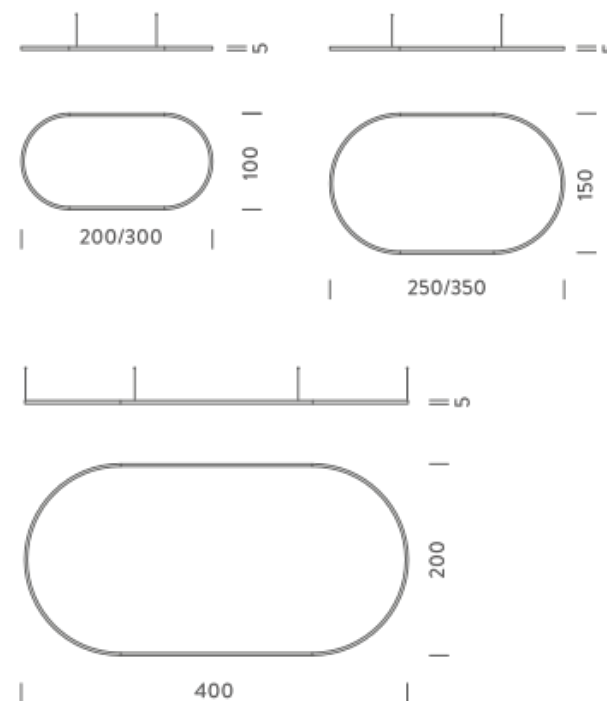

4X2M | UP - DOWNLIGHT - 2700K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 296W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 2700K |
| Luminous flux | 17126lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17C40G15DBO
BZRO17C40G15DNE
BZRO17C40G15DOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

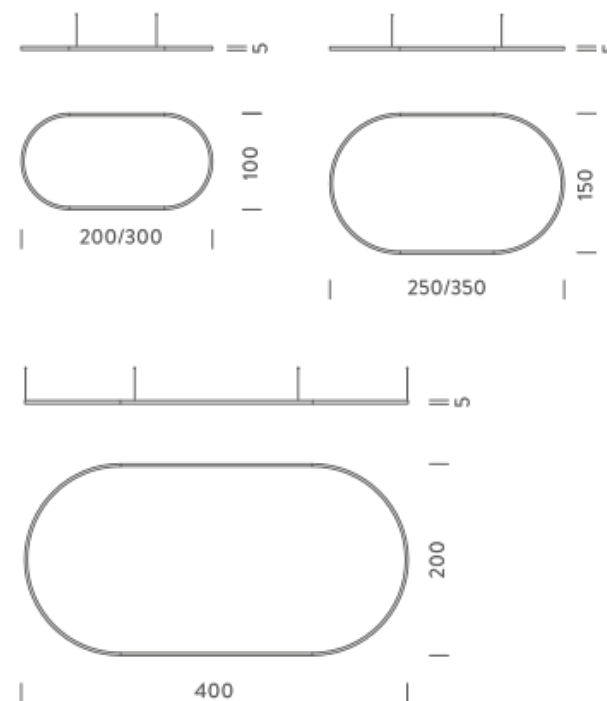

4X2M | DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 9067lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO16C40G15WBO
BZRO16C40G15WNE
BZRO16C40G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

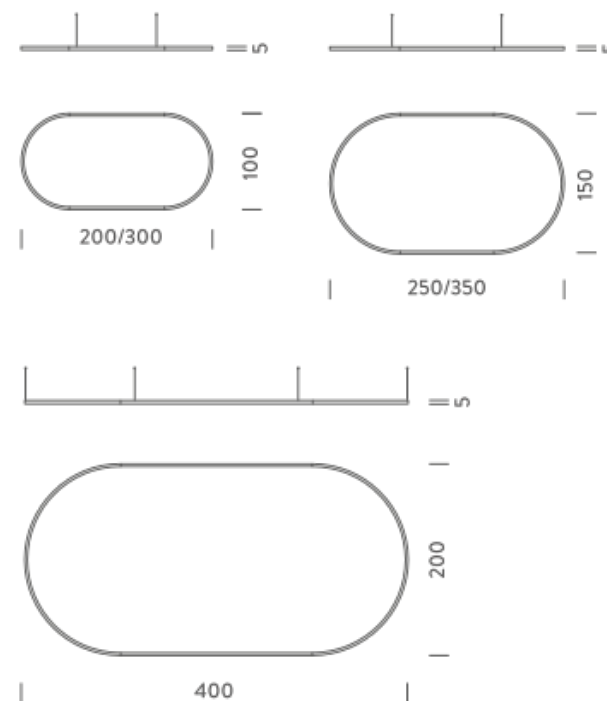

4X2M | UP - DOWNLIGHT - 3000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 296W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 3000K |
| Luminous flux | 18134lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17C40G15WBO
BZRO17C40G15WNE
BZRO17C40G15WOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

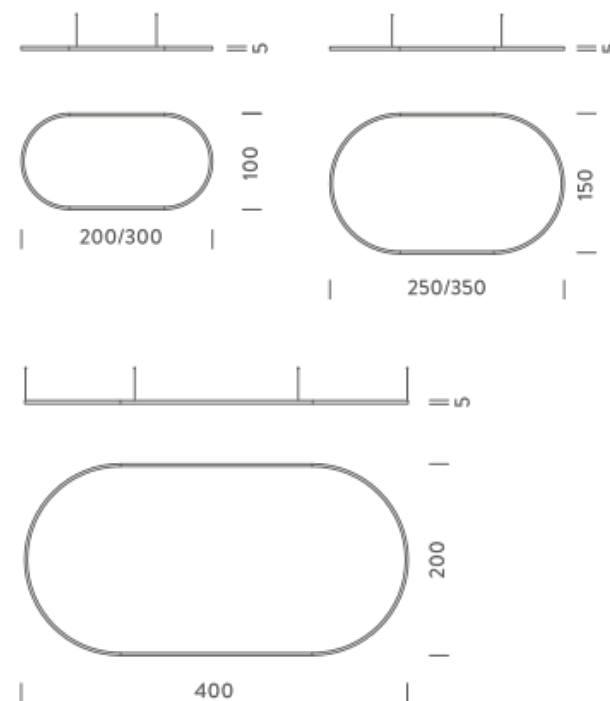

4X2M | DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 148W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 10074lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO16C40G15NBO
BZRO16C40G15NNE
BZRO16C40G15NOR


Structure

white
black
gold

PACKAGE

Package 01 Dimension: 210x110x15 cm

Certificazioni

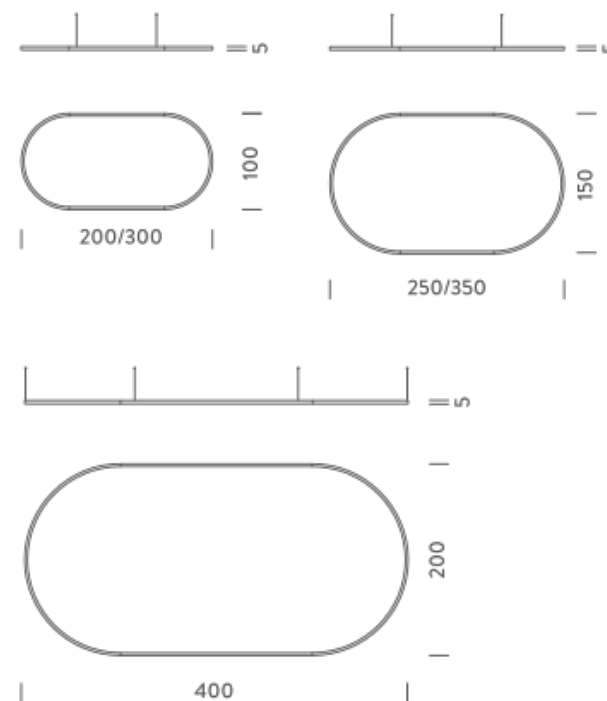

4X2M | UP - DOWNLIGHT - 4000K

LAMPING

| | |
|-----------------------|--|
| Source | Linear LED |
| Total power | 296W |
| Emission | Diffused orientable |
| Switching | DALI |
| Tension | 220V |
| Color temperature | 4000K |
| Luminous flux | 20149lm |
| Typ cri | 90 |
| Energy class | A+ |
| Ip class | 40 |
| Dimensions | 400x200x5cm |
| Materials | Aluminium |
| Notes | Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces |
| Customization options | Shapes, sizes |
| Accessories | Canopy, for concrete ceiling Ceiling plate, for false ceiling |

Codes

BZRO17C40G15NBO
BZRO17C40G15NNE
BZRO17C40G15NOR

Structure

white
black
gold

PACKAGE

Package 01 Dimension: 160x160x15 cm

Certificazioni

