

# ZIRKOL – O

ZIRKOL -O is a family of oval suspension lamps suitable for general and decorative lighting.

Anodized aluminium body and opal screen for a homogeneous lighting.

Available as single direct light emission version or with double light emission with high flux and different colour temperatures.

Remote driver included



## 2X1M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	2700K
Luminous flux	4282lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A20G15DBO  
BZRO16A20G15DNE  
BZRO16A20G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

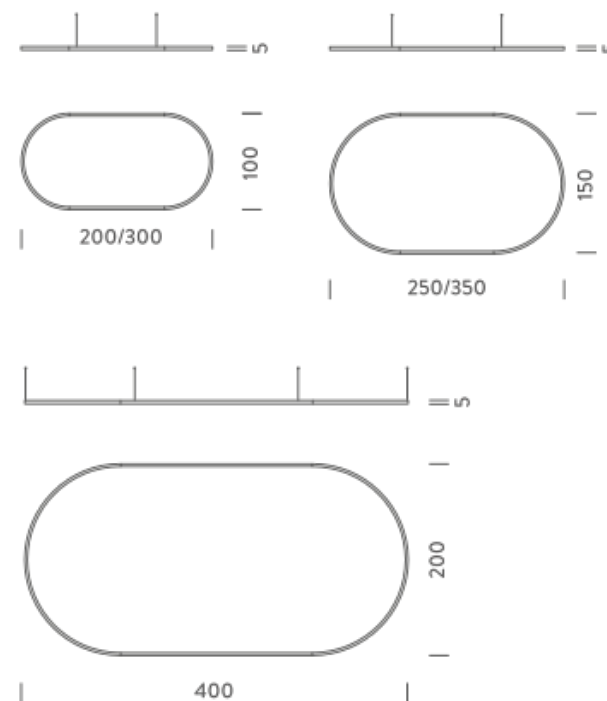

## 2X1M | UP - DOWNLIGHT -2700K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	8563lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A20G15DBO  
BZRO17A20G15DNE  
BZRO17A20G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

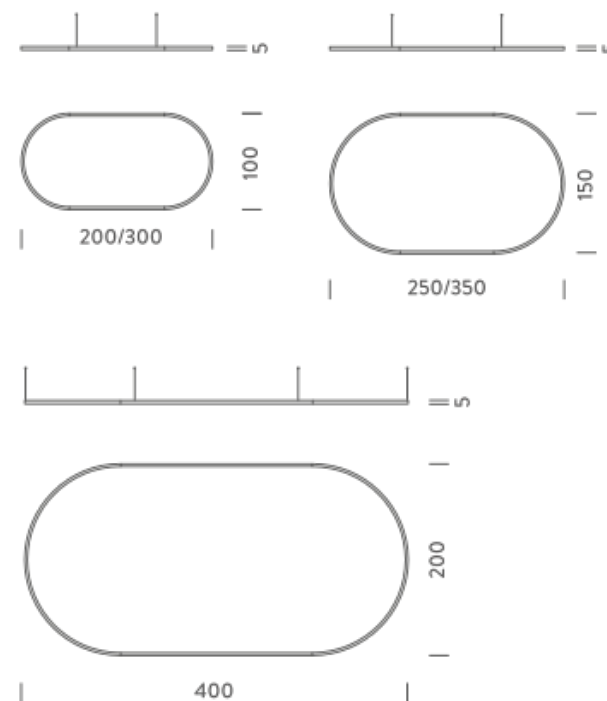

## 2X1M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	3000K
Luminous flux	4533lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A20G15WBO  
BZRO16A20G15WNE  
BZRO16A20G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

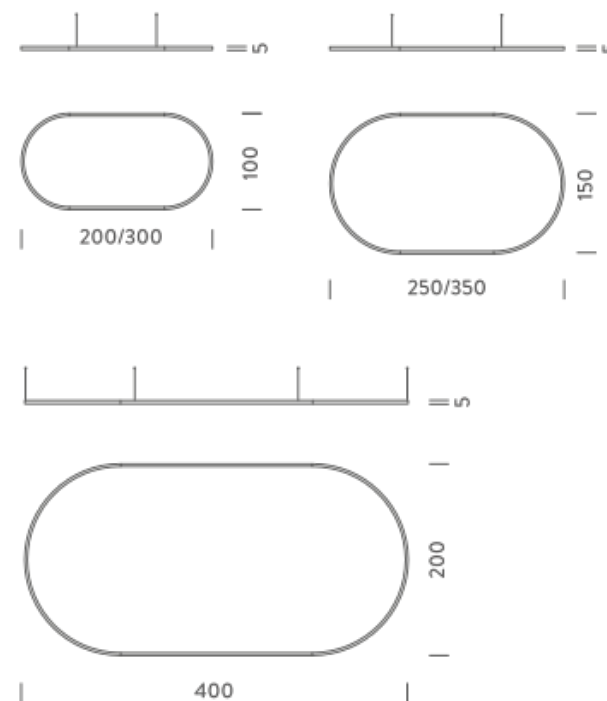

## 2X1M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	9067lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A20G15WBO  
BZRO17A20G15WNE  
BZRO17A20G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

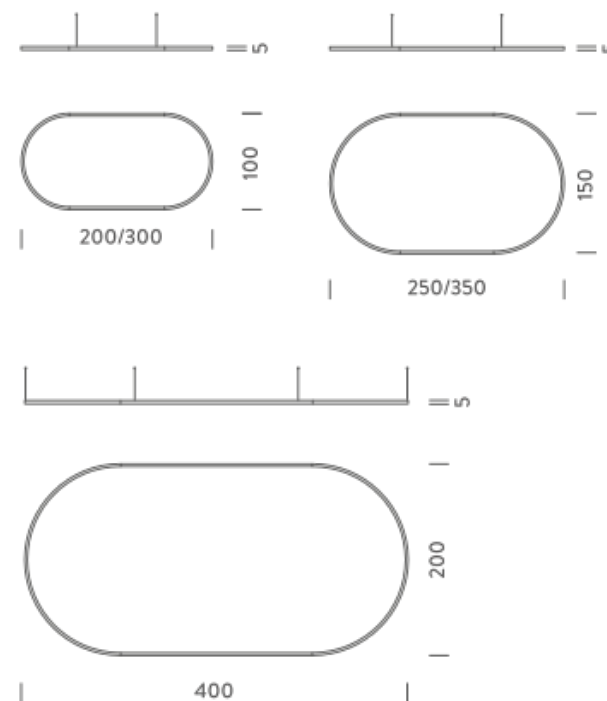

## 2X1M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	74W
Emission	Diffused orientable
Switching	DALI
Tension	110/240V
Color temperature	4000K
Luminous flux	5037lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 100/305V included, 1 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A20G15NBO  
BZRO16A20G15NNE  
BZRO16A20G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

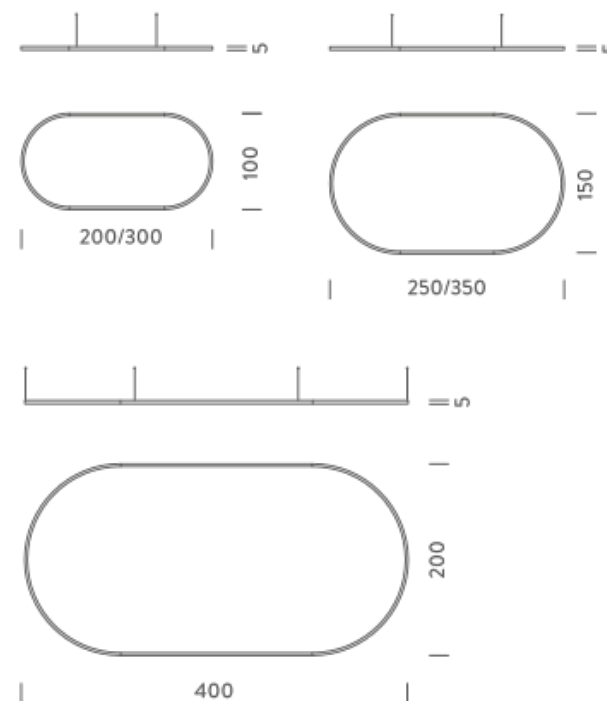

## 2X1M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	10074lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	200x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A20G15NBO  
BZRO17A20G15NNE  
BZRO17A20G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x100x15 cm

### Certificazioni

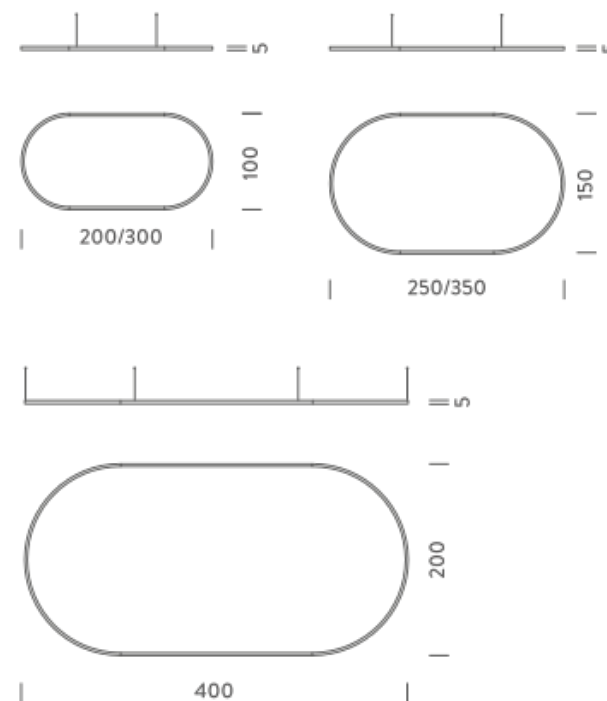

## 3X1M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	5948lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A30G15DBO  
BZRO16A30G15DNE  
BZRO16A30G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x100x15 cm

### Certificazioni

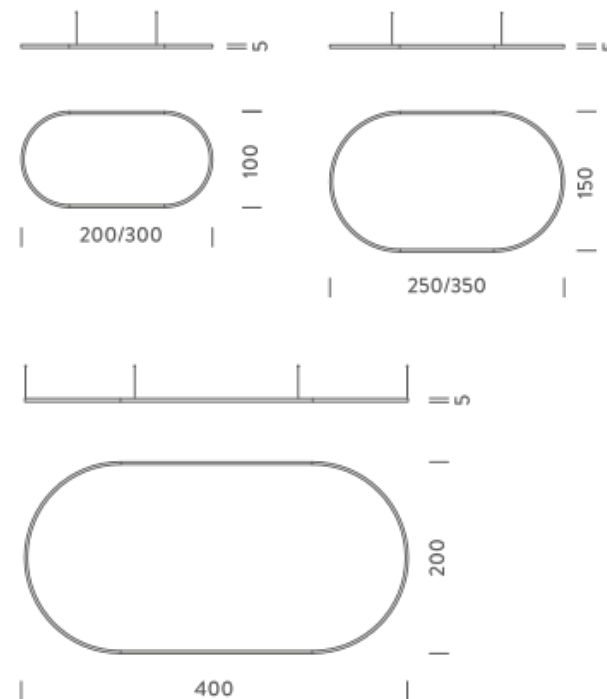



## 3X1M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	11895lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A30G15DBO  
BZRO17A30G15DNE  
BZRO17A30G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 310x100x15 cm

### Certificazioni

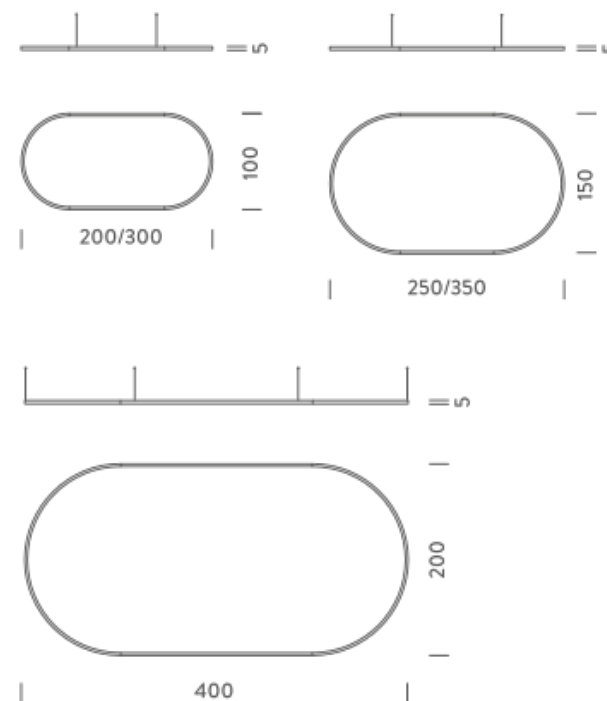

## 3X1M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	6297lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A30G15WBO  
BZRO16A30G15WNE  
BZRO16A30G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x100x15 cm

### Certificazioni

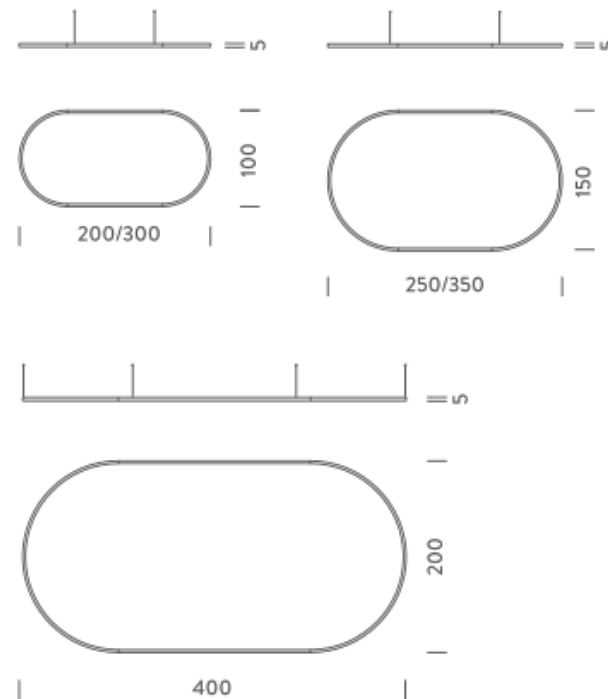

## 3X1M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	12595lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled Shapes, sizes
Customization options	
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A30G15WBO  
BZRO17A30G15WNE  
BZRO17A30G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 310x100x15 cm

### Certificazioni

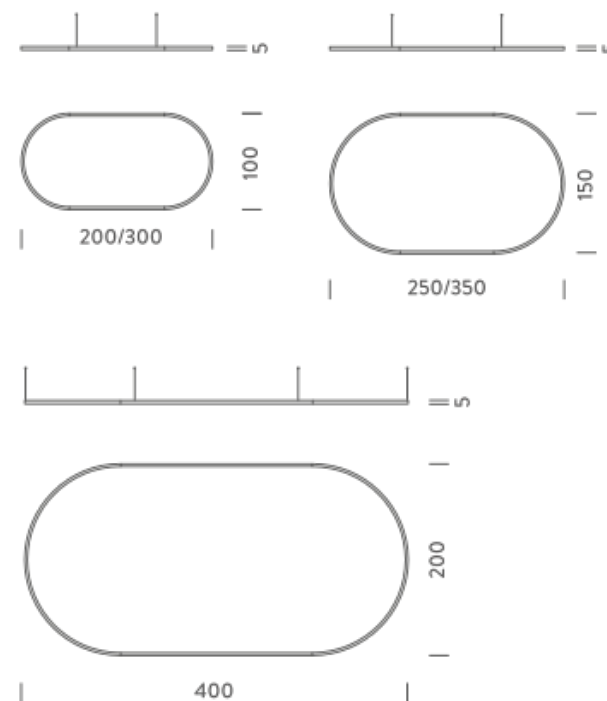

## 3X1M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	103W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	6997lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16A30G15NBO  
BZRO16A30G15NNE  
BZRO16A30G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 310x100x15 cm

### Certificazioni

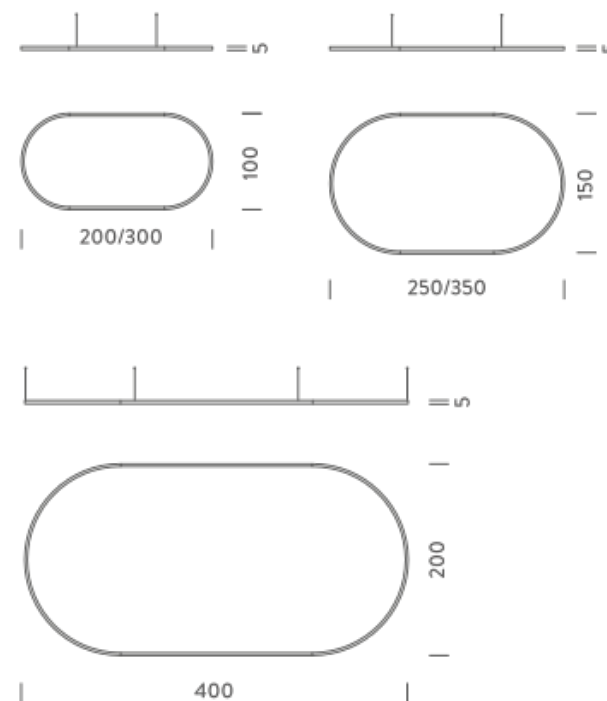

## 3X1M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	206W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	13994lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	300x100x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 2 electrical cables 5m, 4 adjustable metal cables length 3m, shipped assembled
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 2 electrical cables   Ceiling plate, for false ceiling

### Codes

BZRO17A30G15NBO  
BZRO17A30G15NNE  
BZRO17A30G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

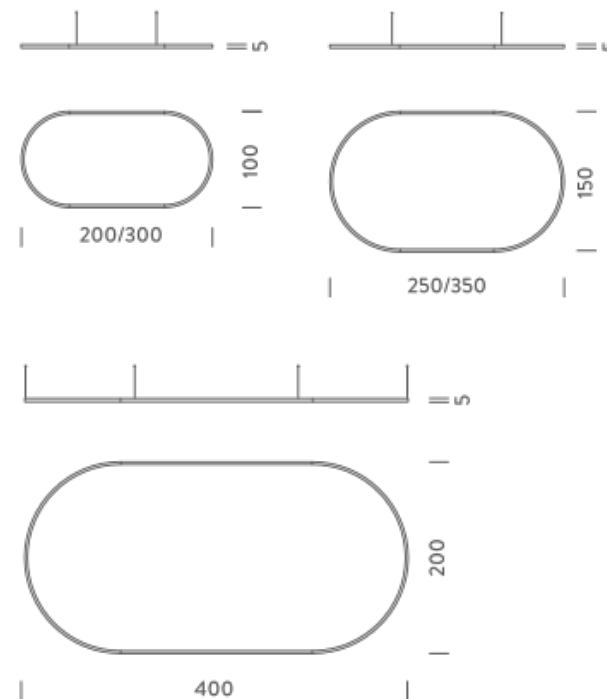

## 2,5X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	5589lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B25G15DBO  
BZRO16B25G15DNE  
BZRO16B25G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

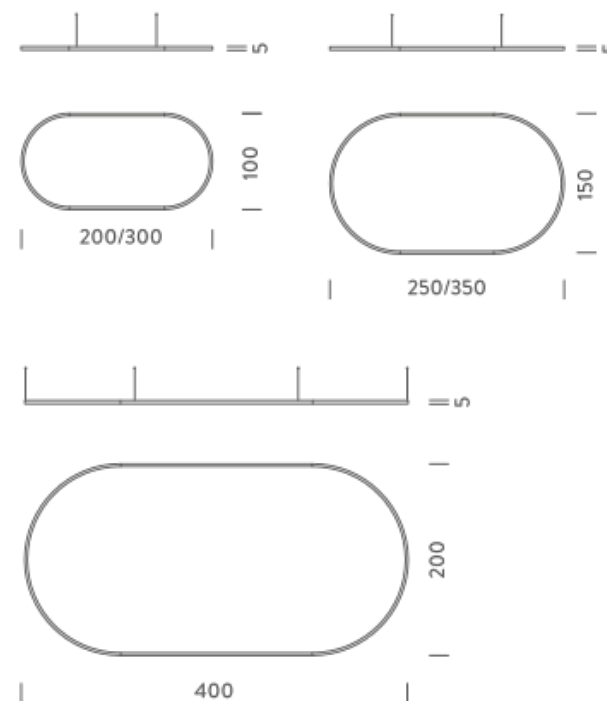

## 2,5X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	11179lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B25G15DBO  
BZRO17B25G15DNE  
BZRO17B25G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 160x160x15 cm

### Certificazioni

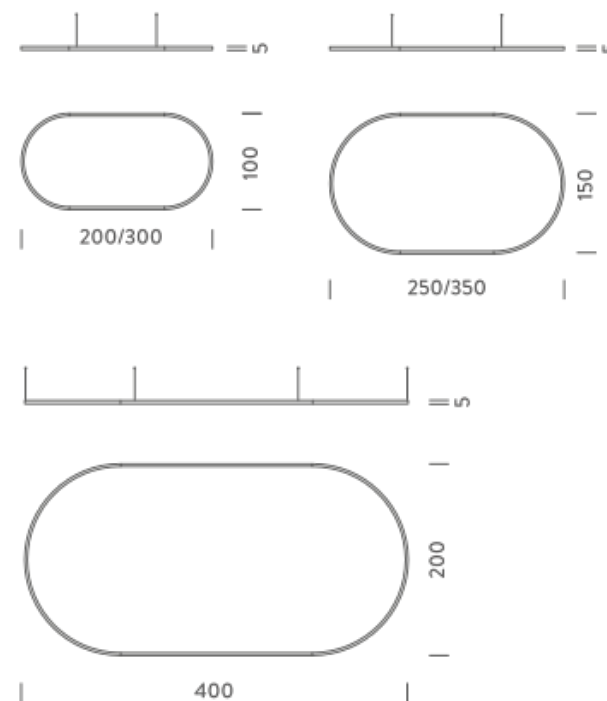

## 2,5X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	5918lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B25G15WBO  
BZRO16B25G15WNE  
BZRO16B25G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

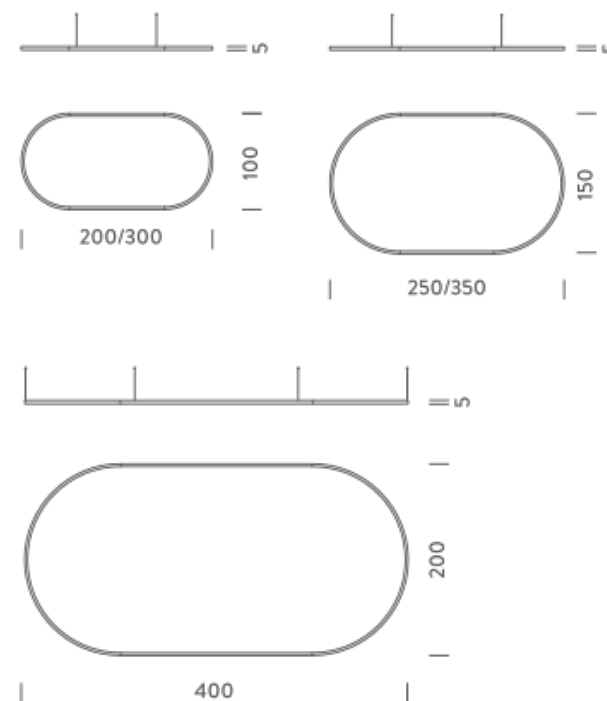



## 2,5X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	11836lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B25G15WBO  
BZRO17B25G15WNE  
BZRO17B25G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 160x160x15 cm

### Certificazioni

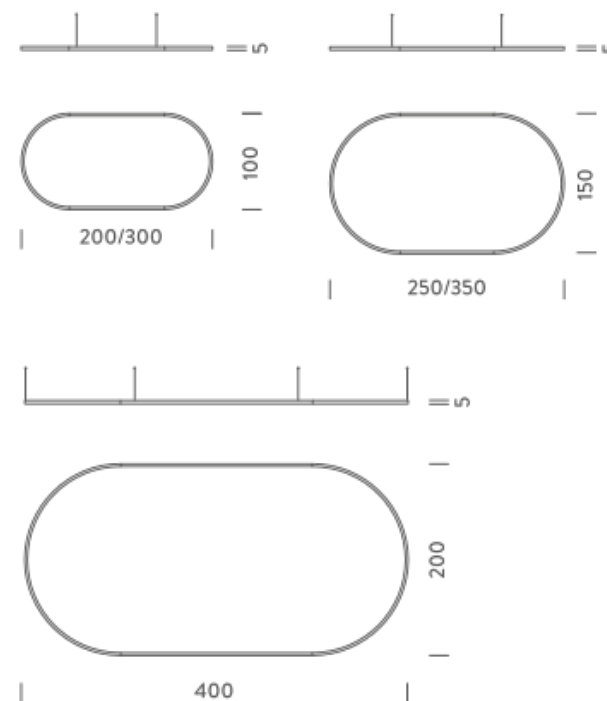

## 2,5X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	97W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	6576lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B25G15NBO  
BZRO16B25G15NNE  
BZRO16B25G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 160x160x15 cm

### Certificazioni

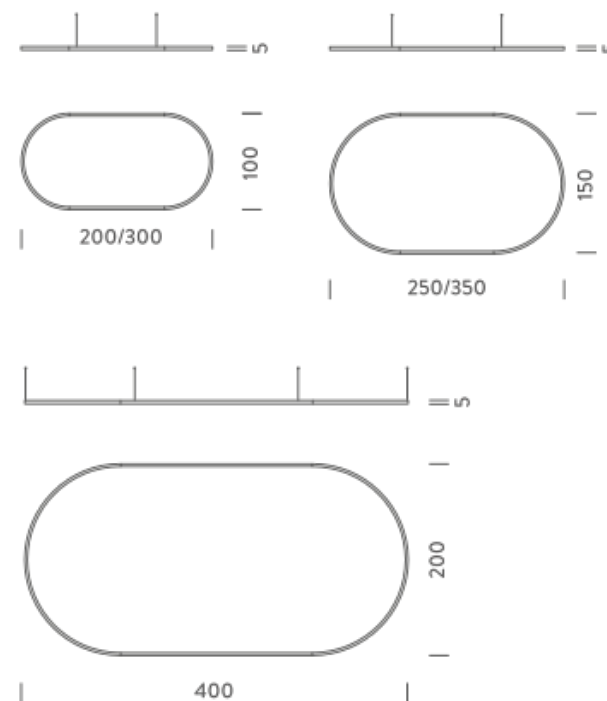

## 2,5X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	193W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	13152lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	250x250x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B25G15NBO  
BZRO17B25G15NNE  
BZRO17B25G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

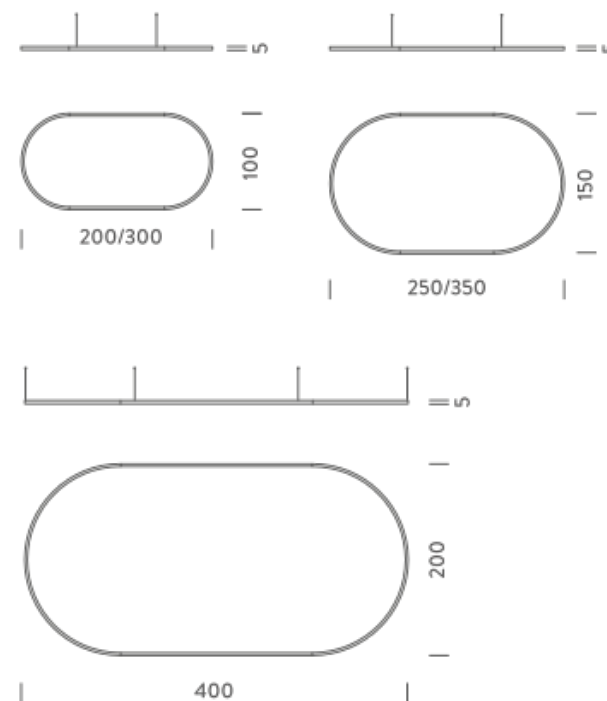

## 3,5X1,5M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	7255lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B35G15DBO  
BZRO16B35G15DNE  
BZRO16B35G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

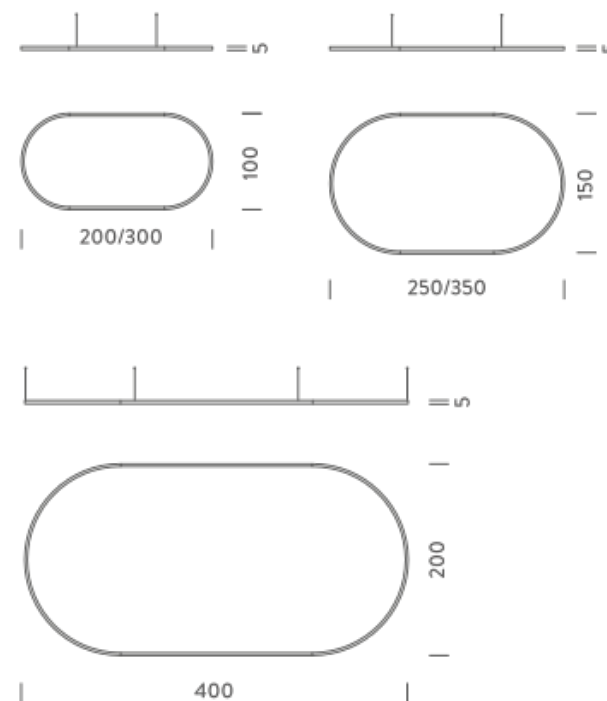

## 3,5X1,5M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	1451lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B35G15DBO  
BZRO17B35G15DNE  
BZRO17B35G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

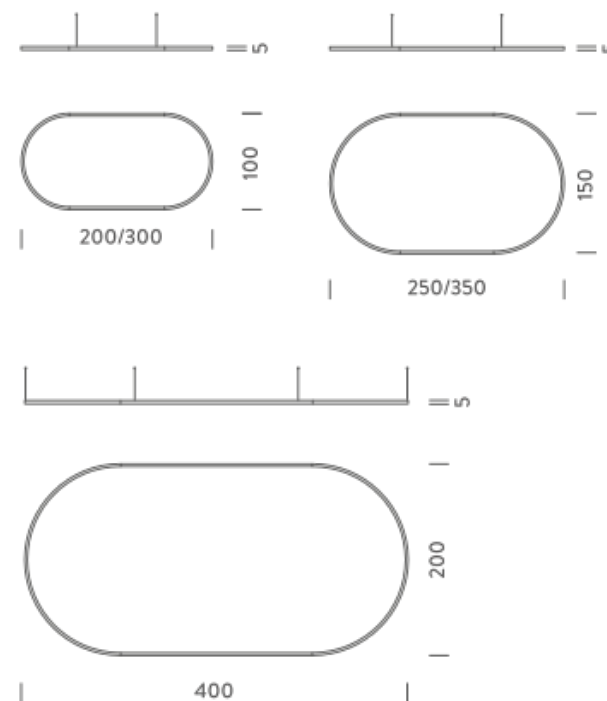

## 3,5X1,5M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	7682lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B35G15WBO  
BZRO16B35G15WNE  
BZRO16B35G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

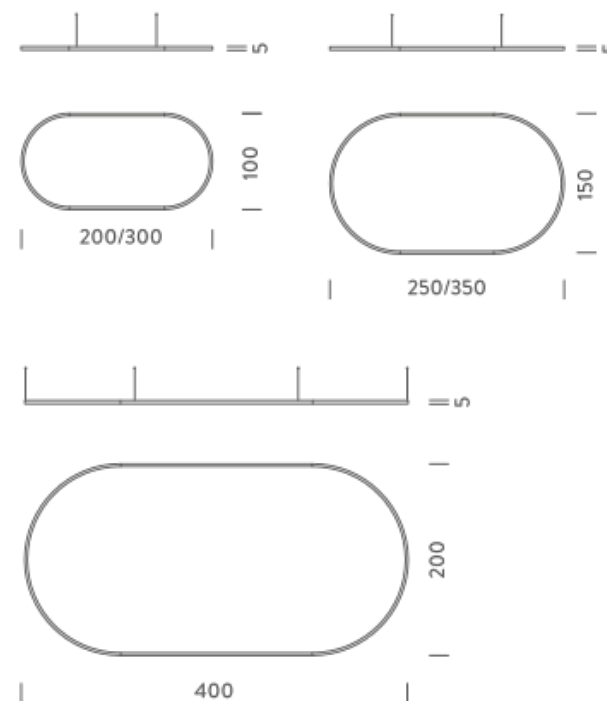

## 3,5X1,5M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	15364lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B35G15WBO  
BZRO17B35G15WNE  
BZRO17B35G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

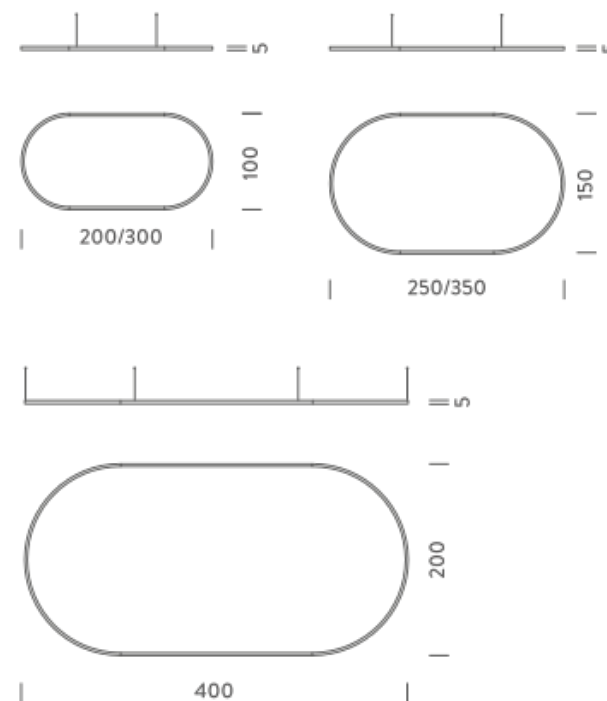

## 3,5X1,5M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	125W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	8536lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 1 electrical cable 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Canopy box, 1 driver, 1 electrical cable   Ceiling plate, for false ceiling

### Codes

BZRO16B35G15NBO  
BZRO16B35G15NNE  
BZRO16B35G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01 Dimension: 210x110x15 cm

### Certificazioni

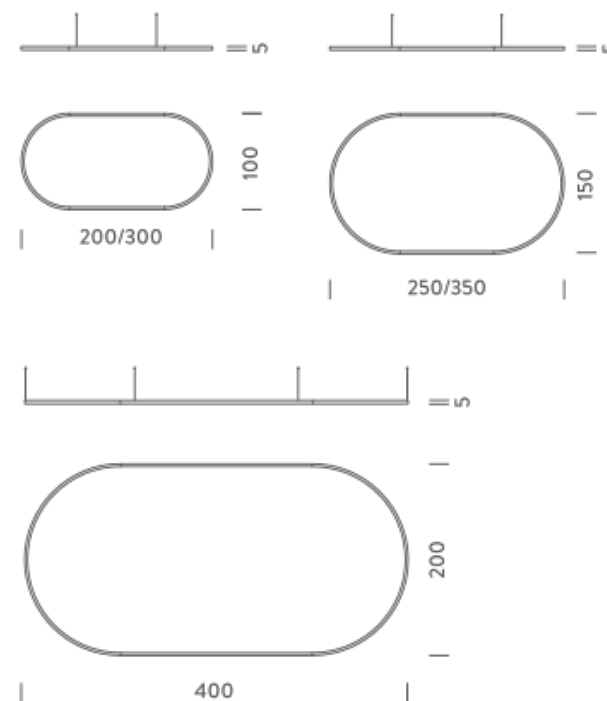



## 3,5X1,5M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	251W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	17072lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	350x150x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17B35G15NBO  
BZRO17B35G15NNE  
BZRO17B35G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

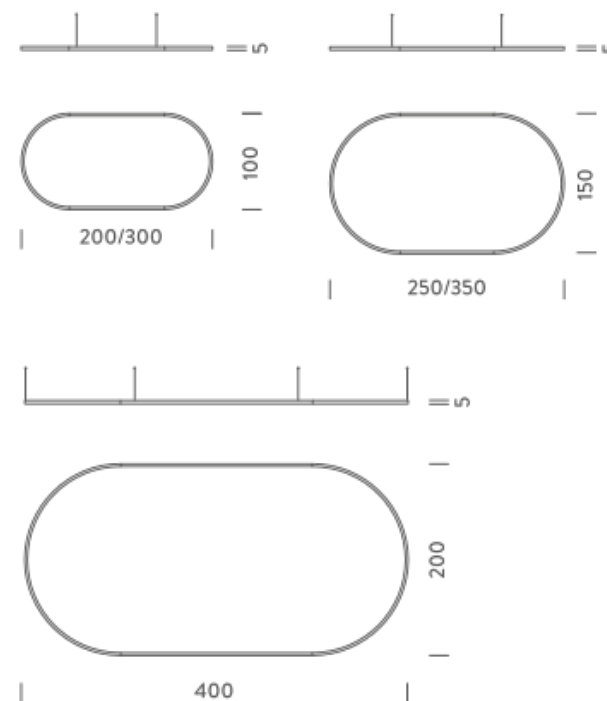

## 4X2M | DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	8536lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO16C40G15DBO  
BZRO16C40G15DNE  
BZRO16C40G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

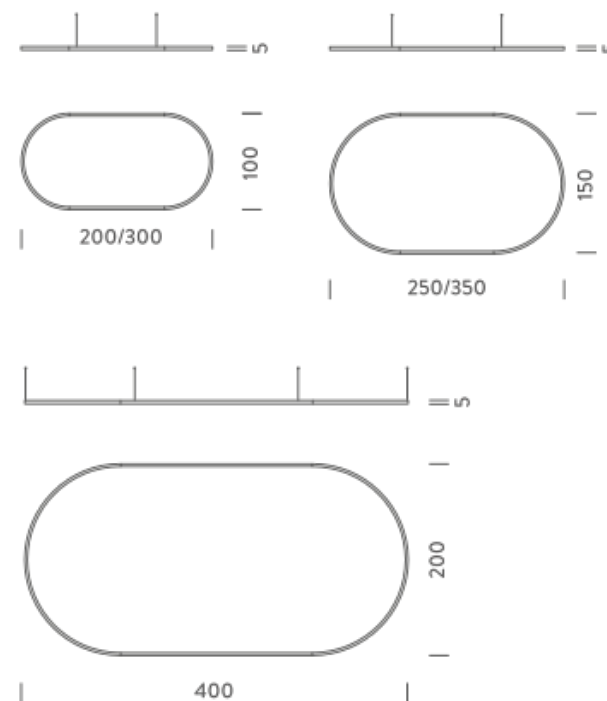

## 4X2M | UP - DOWNLIGHT - 2700K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	2700K
Luminous flux	17126lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17C40G15DBO  
BZRO17C40G15DNE  
BZRO17C40G15DOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

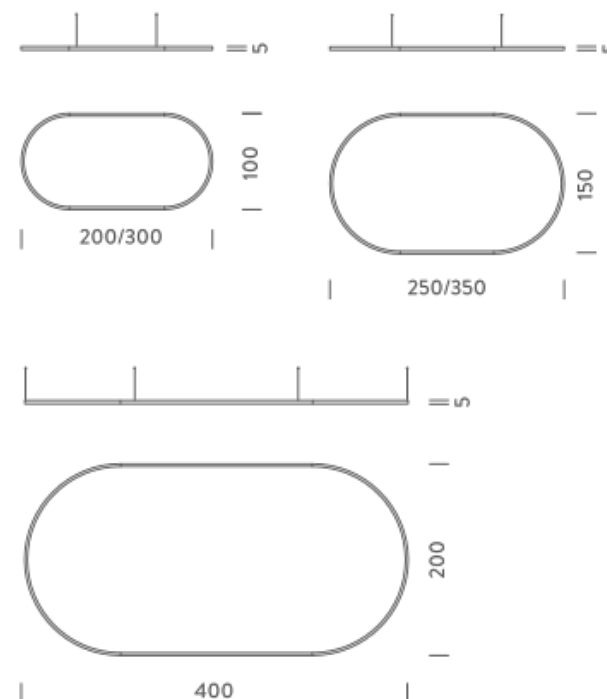

## 4X2M | DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	9067lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO16C40G15WBO  
BZRO16C40G15WNE  
BZRO16C40G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

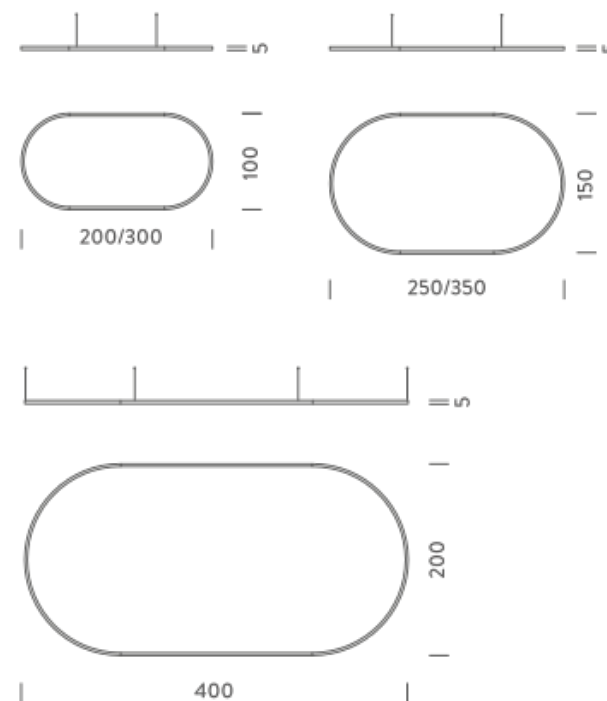

## 4X2M | UP - DOWNLIGHT - 3000K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	3000K
Luminous flux	18134lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17C40G15WBO  
BZRO17C40G15WNE  
BZRO17C40G15WOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

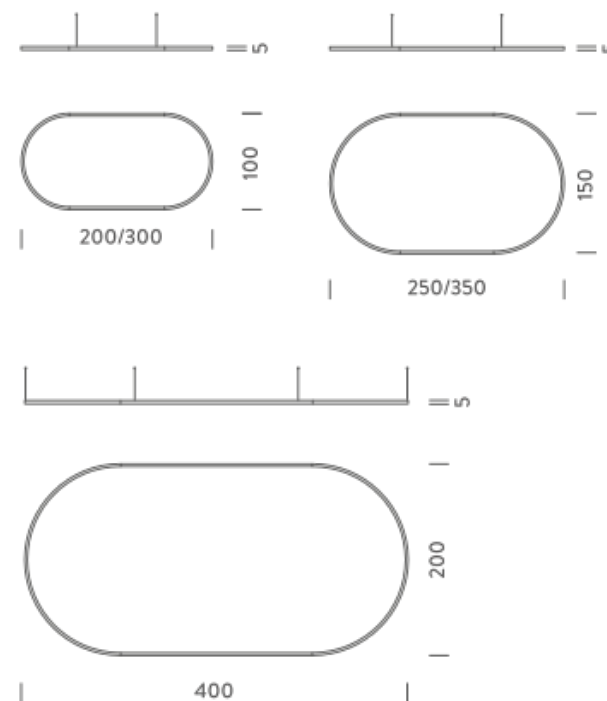

## 4X2M | DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	148W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	10074lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 electrical cables 5m, 6 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO16C40G15NBO  
BZRO16C40G15NNE  
BZRO16C40G15NOR


### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 210x110x15 cm

### Certificazioni

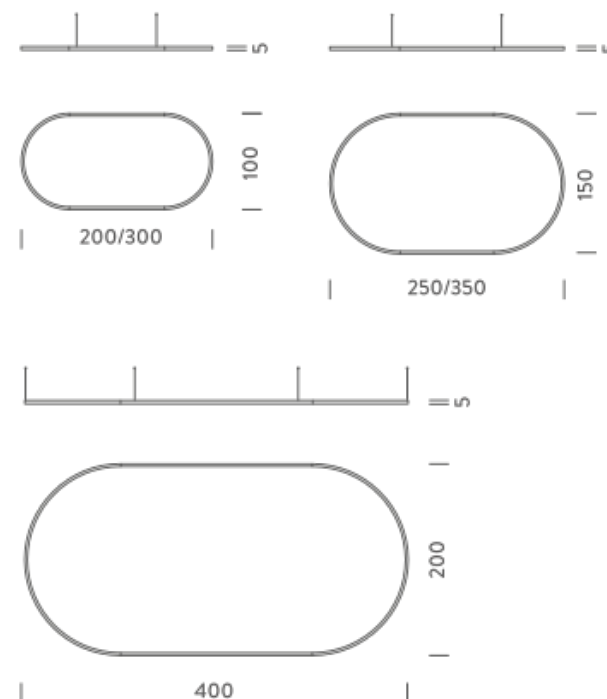

## 4X2M | UP - DOWNLIGHT - 4000K

### LAMPING

Source	Linear LED
Total power	296W
Emission	Diffused orientable
Switching	DALI
Tension	220V
Color temperature	4000K
Luminous flux	20149lm
Typ cri	90
Energy class	A+
Ip class	40
Dimensions	400x200x5cm
Materials	Aluminium
Notes	Driver 220/240V included, 4 adjustable metal cables length 3m, shipped into 4 pieces
Customization options	Shapes, sizes
Accessories	Canopy, for concrete ceiling   Ceiling plate, for false ceiling

### Codes

BZRO17C40G15NBO  
BZRO17C40G15NNE  
BZRO17C40G15NOR

### Structure

white  
black  
gold

### PACKAGE

Package 01      Dimension: 160x160x15 cm

### Certificazioni

