


LUX WALKWAY

Recessed LED spot for outdoor use suitable for decorative and signalization lighting. Sanded chromed brass body. 1 high-emission LED, with asymmetric beam, protective glass and cable gland. Fixing with recessed plastic installation box LUXCASSA1 (not included) or with the steel fixing springs (included).



3000K

LAMPING

Source	LED spot
Total power	1,2W
Emission	Asymmetric
Tension	350mA
Color temperature	3000K
Initial luminaire efficacy	<10lm/W
Initial chromaticity	SDCM < 3
Typ cri	70
Energy class	A+
Ip class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX02012170CS

Structure


grey

PACKAGE

Package 01

Dimension: 15x11x5 cm / Gross weight: 0,22 kg

Certificazioni

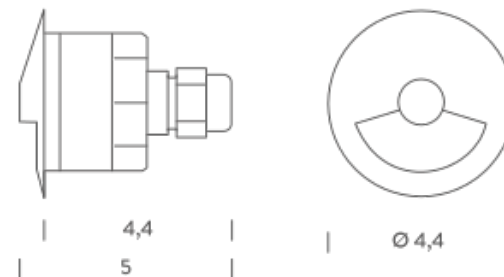

5000K

LAMPING

Source	LED spot
Total power	1,2W
Emission	Asymmetric
Tension	350mA
Color temperature	5000K
Initial luminaire efficacy	> 37lm/W
Initial chromaticity	SDCM < 3
Typ cri	90
Energy class	A+
Ip class	65
Dimensions	Ø4,4x5,0cm
Materials	Sanded chromed brass
Ambient temperature range	- 20°C / 35°
Performance ambient temperature	25°
Notes	compatible controls: 1-10V, DALI, DMX, Casambi; cable 1m; driver not included
Customization options	Colour temperatures, lengths
Accessories	Drivers 350mA, Recessed box, Recessed box cassa 1
Net lamp weight	0,22 kg

Codes

BLUX0201217WCS

Structure

grey

PACKAGE

Package 01 Dimension: 105x11x2,5 cm / Gross weight: 0,45 kg

Certificazioni

