

ANDES LED 2 FIXED DOWNLIGHT

TRUE COLOUR CRI 98 | IP65

DLD/ANDE2-R-F

DLD
ARCHITECTURAL




DETAILS

Type	Fixed
IP Rating	IP65
IP Zone	Zone 1 & 2
Class	I
Standards	CE
Fire Rated	60+ minutes
Material	Aluminium
Cable	2 Core 0.5mm ²
Cable Length	400mm
Warranty	5 Years


KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Simple access to the light engine for easy maintenance
- Dim to dark with our range of fully tested drivers

DIMENSIONS

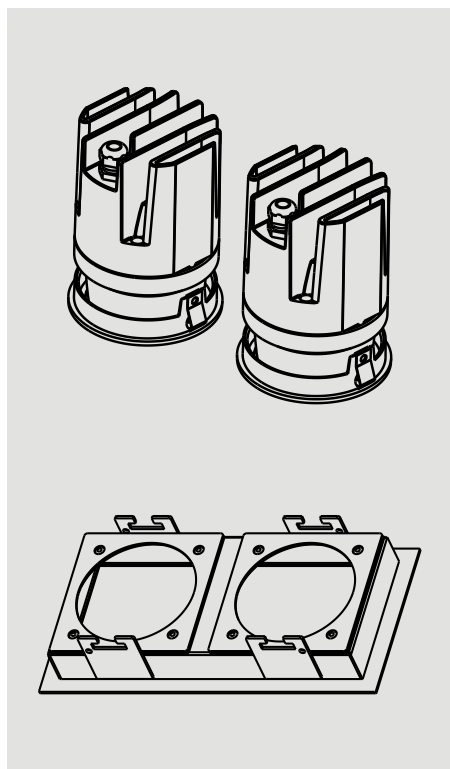

Light Engine:	Ø64mm, H.89mm
Aperture:	Ø35.5mm
Frame:	180mm x 90mm H.35.2mm
Total Height:	105mm
Cutout:	165mm x 80mm

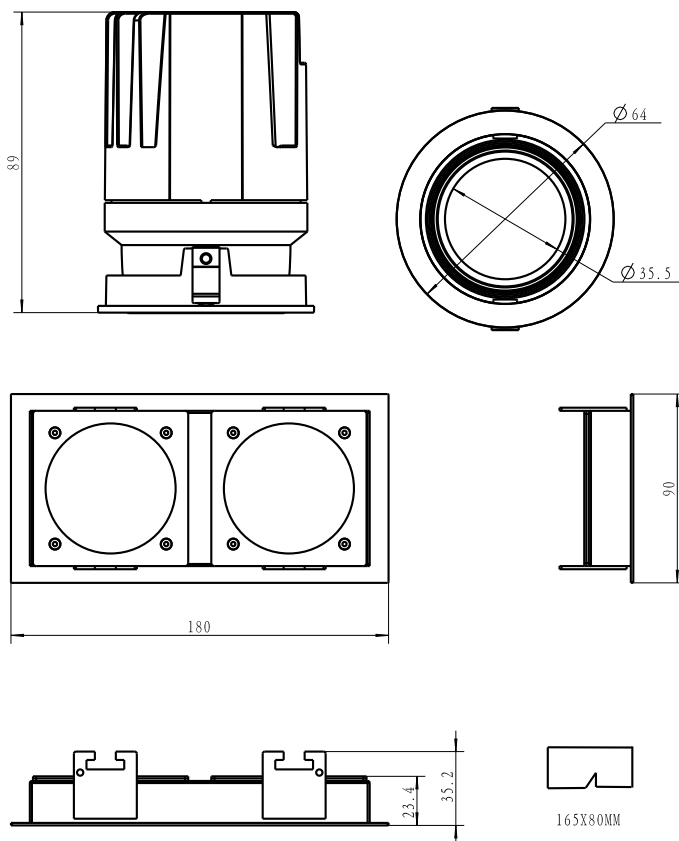

TRUE COLOUR 98 CRI

ANDES LED 2 FIXED DOWNLIGHT

TRUE COLOUR CRI 98 | IP65

DLD/ANDE2-R-F

DLD
ARCHITECTURAL

PRODUCT CODE CONSTRUCTION

PRODUCT CODE PREFIX	FINISH	BAFFLE	LIGHT TEMP. CCT	BEAM ANGLE	DRIVER
DLD/ANDE2-R-F	W	B	27K	24D	010
<i>APPLICATION</i> P Plaster In R Recessed	<i>VERSION</i> A Adj. F Fixed	W White B Black G Gold	27K 2700K 30K 3000K 40K 4000K	15D 15° 24D 24° 36D 36°	No driver TRIAC dim. 0-10V dim. DALI dim.
					MD 010 D

SPECIFICATION

	2700K			3000K			4000K		
BEAM ANGLE	15°	24°	36°	15°	24°	36°	15°	24°	36°
Delivered lumens*	1170 lm	1456 lm	1586 lm	1248 lm	1560 lm	1490 lm	Available On Request		
*(Tc 85°C, +/-7%)									
Efficacy Lm/W	90	112	122	96	120	130	Available On Request		
Binning SDCM (Hot)	2								
CRI	98								
R9	95								
TM30 Rf Rg	Rf 95 Rg 95								
LED Type	Luminus XNova™ Generation 2 CXM-9 COB LED								
LED Lifetime (Ave.)	50,000 hrs								
POWER									
Wattage	2 x 13W								
Voltage	220-240V								
Current	350mA								
DRIVER									
Supported Protocols	Mains Dim / TRIAC / 0-10V / DALI / Bluetooth								
Dim to Dark	0.1% Lux								
Distance from Luminaire	20m maximum								
Wiring	Series								
Emergency	Emergency packs available								

 **01189 889414**

 **sales@darklightdesign.com**

 **darklightdesign.com**

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH