




DIMENSIONS



ACCESSORIES

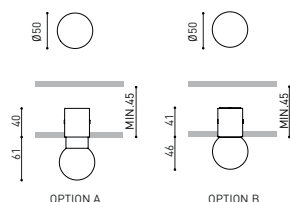

DRIVER OPTIONS


TRIMLESS ACCESSORY
(MANDATORY)

Name	ALASKA TRIMLESS 3000K N
Reference	A4010001N
Color	Matt black
RAL	Anodised, bath colour, looks alike RAL 9005
Category	CEILING RECESSED
PRODUCT	
LIGHTING INFORMATION	
Light source	LED
Gross luminous flux	500 Lm
Power	4,5 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	MacAdam Step 2
Light beam angle	21°
Lighting efficiency	30%
Efficacy	111 Lm/W
Current intensity	500 mA
Dimming	No Dim / DALI
Control through bluetooth	Please Consult
Driver	Excluded: Must be placed on remote
Electrical insulation class	III
Energy efficiency	A
LED lifespan	L80B10 (Tj=85°C) >60.000h
OTHER DATA	
Ingress Protection	IP20
Recess measurements	Ø38 mm.
Weight	240 g.
Packaged weight	280 g.
Packaging dimensions	129 x 79 x 64 mm
Units per package	1
Materials	Aluminium / Optical Glass




Alaska is the contemporary reinterpretation of the technology and design of the classical incandescent filament light bulb. Alaska is composed of a solid optical glass sphere that symbolically represents the glass bulb of a traditional light bulb. Its compact body is one single piece that is manually lathed and polished like a piece of jewellery. Each one of the luminaires is traditionally produced, thus acquiring the value of an unrepeatabe decorative work.

POLAR DIAGRAM

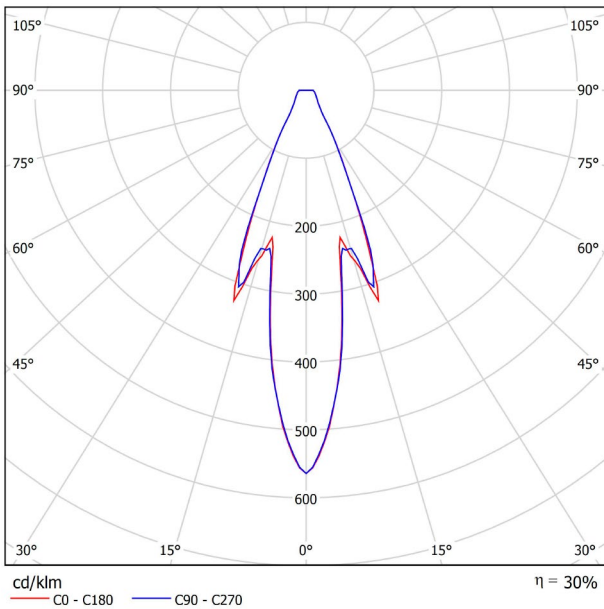


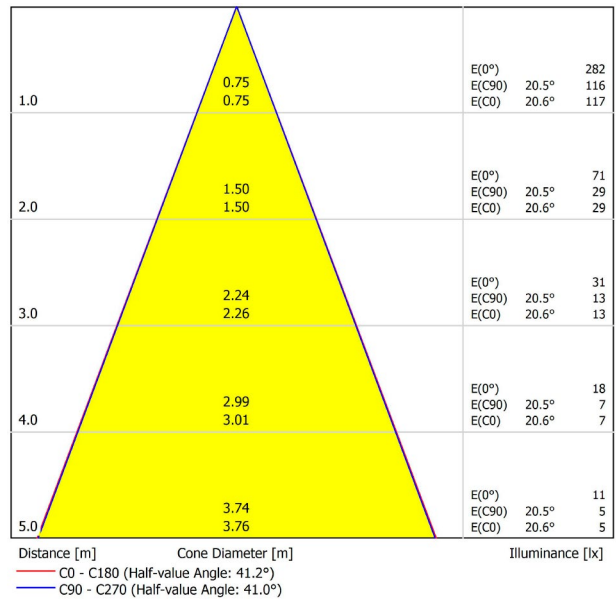

CONICAL DIAGRAM




UGR

Glare Evaluation According to UGR																	
ρ Ceiling	70	70	50	50	30	70	70	50	50	30							
ρ Walls	50	30	50	30	30	50	30	50	30	30							
ρ Floor	20	20	20	20	20	20	20	20	20	20							
Room Size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis										
X	Y	2H	2H	3H	4H	6H	8H	12H	4H	4H	6H	8H	12H	4H	6H	8H	12H
		16.4	17.4	16.7	17.6	17.8	16.4	17.4	16.7	17.6	17.8	16.4	17.4	16.7	17.6	17.8	16.4
		19.2	20.1	19.5	20.3	20.6	19.1	20.0	19.4	20.3	20.5	20.3	21.0	20.6	21.3	21.6	20.3
		20.7	21.5	21.0	21.8	22.1	20.6	21.5	20.9	21.7	22.0	22.0	22.6	22.2	23.0	23.3	22.0
		22.3	23.1	22.6	23.4	23.7	22.2	23.0	22.6	23.3	23.6	23.8	24.4	23.8	24.4	24.7	23.3
		23.2	23.9	23.5	24.2	24.6	23.1	23.9	23.5	24.2	24.5	24.8	25.3	24.8	25.3	25.7	24.2
		24.1	24.9	24.5	25.2	25.5	24.1	24.8	24.4	25.1	25.5	24.8	25.3	24.8	25.3	25.7	24.5
		17.3	18.1	17.6	18.4	18.7	17.3	18.1	17.6	18.4	18.7	20.3	21.0	20.6	21.3	21.6	18.7
		20.3	21.1	20.7	21.4	21.7	20.3	21.0	20.6	21.3	21.6	22.0	22.6	22.3	23.0	23.3	20.3
		22.0	22.7	22.4	23.0	23.4	22.0	22.6	22.3	23.0	23.3	23.8	24.4	24.2	24.7	25.1	22.0
		23.9	24.4	24.3	24.8	25.2	23.8	24.4	24.2	24.7	25.1	24.8	25.3	25.2	25.7	26.1	23.9
		24.8	25.4	25.3	25.7	26.2	24.8	25.3	25.2	25.7	26.1	25.9	26.3	26.3	26.8	27.2	24.8
		25.9	26.4	26.4	26.8	27.2	25.9	26.3	26.3	26.8	27.2	22.7	23.2	23.1	23.6	24.0	25.9
		22.7	23.3	23.2	23.7	24.1	22.7	23.2	23.1	23.6	24.0	24.8	25.2	25.2	25.6	26.1	22.7
		24.8	25.3	25.3	25.7	26.2	24.8	25.2	25.2	25.6	26.1	26.0	26.3	26.4	26.8	27.3	24.8
		26.0	26.4	26.5	26.8	27.3	26.0	26.3	26.4	26.8	27.3	27.3	27.6	27.8	28.1	28.6	26.0
		27.3	27.6	27.8	28.1	28.6	27.3	27.6	27.8	28.1	28.6	22.9	23.4	23.3	23.8	24.2	27.3
		22.9	23.4	23.4	23.8	24.2	22.9	23.4	23.3	23.8	24.2	25.1	25.5	25.6	25.9	26.4	22.9
		25.1	25.5	25.6	26.0	26.4	25.1	25.5	25.6	25.9	26.4	26.4	26.7	26.9	27.2	27.7	25.1
		26.4	26.7	26.9	27.2	27.7	26.4	26.7	26.9	27.2	27.7						26.4
Variation of the observer position for the luminaire distances S																	
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1											
S = 1.5H	+0.3 / -0.3					+0.3 / -0.3											
S = 2.0H	+0.4 / -0.5					+0.4 / -0.5											
Standard table		BK12					BK12										
Correction Summand		8.3					8.3										
Corrected Glare Indices referring to 500lm Total Luminous Flux																	




DRIVER OPTIONS*		P	I	
 NO DIM	0434-00-42	4,5W	500mA	1 to 4 ALASKA
 DIM DALI	0434-00-44	4,5W	500mA	1 to 4 ALASKA

220
240 V~ | 50/60 Hz | 

Driver must be placed on remote

MANDATORY FOR INSTALLATION

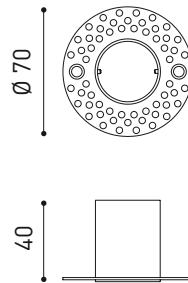

PRODUCT	
Model	Alaska Trimless accessory
Reference	A4011000
Category	Accessories



INSTALLATION OPTIONS

