

# TECHNICAL DATA SHEET


## 200CENT ROUND 2x750LM TWIN ADJ TRIMLESS IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Adjustable 0° - 25°

114x244 mm - h = 100 mm

Material: CALCYT® plaster

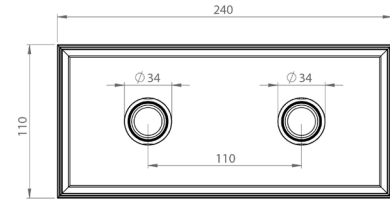

### Ref N° 200 BL CR



Black Chrome - Nero Cromo  
Schwarz Chrom - Zwart Chrom  
Noir Chrome - Negro Cromo

Ask for a bespoke solution or your favorite RAL color

*Chiedere una soluzione personalizzata con il vostro colore RAL preferito*

*Fragen Sie nach einer individuellen Lösung oder Ihrer Lieblings-RAL-Farbe*





*Vraag om een niet standaard afwerking of je favoriete RAL kleur*


*Demandez une solution sur mesure ou votre couleur RAL préférée*

*Solicite una solución a medida o su color favorito de la carta RAL*

### 200CENT ROUND TWIN ADJ 2x750LM CRI 92

2400°K	2700°K	3000°K	4000°K
REF N° 532 29 530	REF N° 532 29 930	REF N° 532 29 830	REF N° 532 29 730

2x6,2W - 2x750LM - 2stepMacAdam - **A+**  
Serial wiring -  -  -  -   
Requires remote LED driver - 250mA  
Standard beam angle 36°

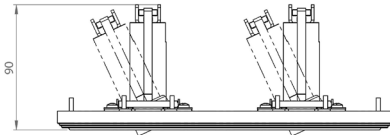

### Ref N° 200 BL BL



Black Black - Nero Nero  
Schwarz Schwarz - Zwart Zwart  
Noir Noir - Negro Negro

### Ref N° 200 WH BL



White Black - Bianco Nero  
Weiß Schwarz - Wit Zwart  
Blanc Noir - Bianco Negro

### Ref N° 200 BL WH



Black White - Nero Bianco  
Schwarz Weiß - Zwart Wit  
Noir Blanc - Negro Bianco

### Ref N° 200 WH WH





White White - Bianco Bianco  
Weiß Weiß - Wit Wit  
Blanc Blanc - Bianco Bianco

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min.2W max. 30W

REF N° 697 00 080 min.27W max. 67W

230V/50Hz -  - current controlled  
 -  - IP20 - 250mA - not dimmable

### Ref N° 200 BL GO



Black Gold - Nero Oro  
Schwarz Gold - Zwart Goud  
Noir Or - Negro Oro

### Ref N° 200 WH GO



White Gold - Bianco Oro  
Weiß Gold - Wit Goud  
Blanc Or - Bianco Oro

### REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 30W

1-10V DALI PUSH

REF N° 697 30 070 min 33W max 65W DALI

REF N° 697 60 080 min 27W max 67W 1-10V PUSH

REF N° 697 72 020 min 6W max 12,5W PHASE DIM

230V/50Hz -  - current controlled  
 -  - IP20 - 250mA - dimmable

### Ref N° 200 BL CO




Black Copper - Nero Rame  
Schwarz Kupfer - Zwart Koper  
Noir Cuivre - Negro Cobre

### Ref N° 200 WH CO




White Copper - Bianco Rame  
Weiß Kupfer - Wit Koper  
Blanc Cuivre - Bianco Cobre

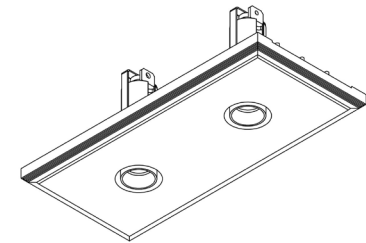

### INSTALLATION KIT

**STANDARD** (included) installation system for ceiling 9 - 12 - 15 mm  
REF N° 200 99 025 installation system for gypsum ceiling 25 mm  
REF N° 200 99 030 installation system for gypsum ceiling 30 mm  
REF N° 856 00 000 Concrete box 200Cent Twin- Galvanized steel



### BEAM ANGLES

**STANDARD** (included) beam angle 36°