

TECHNICAL DATA SHEET




200CENT ROUND 2x250LM TWIN FIX TRIMLESS IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

114x244 mm - h = 90 mm

Material: CALCYT® plaster

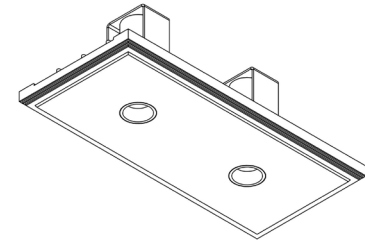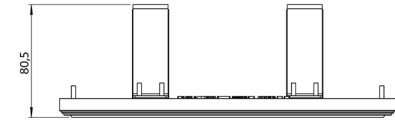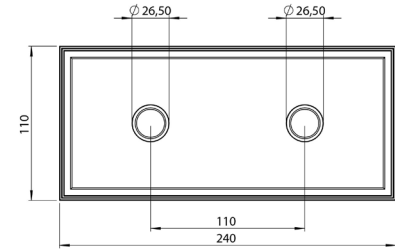

Ref N° 200 BLACK

Black
Nero
Schwarz
Zwart
Noir
Negro



Ref N° 200 WHITE

White
Bianco
Weiß
Wit
Blanc
Blanco



Ref N° 200 CHROME

Chrome
Cromo
Chrom
Chroom
Chrome
Cromo



Ref N° 200 GOLD

Gold
Oro
Gold
Goud
Or
Oro



Ref N° 200 COPPER

Copper
Rame
Kupfer
Koper
Cuivre
Cobre

200CENT ROUND TWIN IP20 2x250LM CRI 92

2200°K	2700°K	3000°K	4000°K
REF N° 514 27 530	REF N° 514 27 930	REF N° 514 27 830	REF N° 514 27 730

2x3 W - 2x250LM - 2 step MacAdam - **A+**
Serial wiring - - - -
Requires remote LED driver - 1050mA
Standard narrowbeam 12° - Optional 8° beam
Ultra low glare (UGR < 13)

REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 39W

REF N° 697 00 025 min.2W max. 50W

230V/50Hz - - current controlled
 - - IP20 - 1050mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 025 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 70 050 min 2W max 45W PHASE DIM

230V/50Hz - - current controlled
 - - IP20 - 1050mA - dimmable


INSTALLATION KIT

STANDARD (included) installation system for ceiling 9 - 12 - 15 mm

REF N° 200 99 025 installation system for gypsum ceiling 25 mm

REF N° 200 99 030 installation system for gypsum ceiling 30 mm

REF N° 856 00 000 Concrete box 200Cent Twin - Galvanized steel

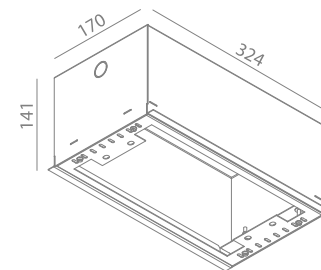

BEAM ANGLES

STANDARD (included) beam angle 12°
REF N° 203 20 008 (option) beam angle 8°

Ask for a bespoke solution or your favorite RAL color
Chiedere una soluzione personalizzata con il vostro colore RAL preferito
Fragen Sie nach einer individuellen Lösung oder Ihrer Lieblings-RAL-Farbe
Vraag om een niet standaard afwerking of je favoriete RAL kleur
Demandez une solution sur mesure ou votre couleur RAL préférée
Solicite una solución a medida o su color favorito de la carta RAL