

# TECHNICAL DATA SHEET


## 200CENT ROUND 250LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Pendant

Material: Aluminium



### 200CENT ROUND PENDANT 250LM CRI 92



2200°K	2700°K	3000°K	4000°K
REF N° 518 27 530	REF N° 518 27 930	REF N° 518 27 830	REF N° 518 27 730

3 W - 250LM - 2 step MacAdam - **A+**  
Serial wiring -  -  -  -   
Requires remote LED driver - 1050mA  
Standard narrowbeam 12° - Optional 8° beam  
Ultra low glare (UGR < 13)

### REMOTE LED DRIVER ON/OFF

REF N° 697 00 015 min.2W max. 39W

REF N° 697 00 025 min.2W max. 50W


230V/50Hz -  - current controlled  
 -  - IP20 - 1050mA - not dimmable


### REMOTE LED DRIVER DIM

REF N° 697 60 025 min.3W max. 60W

1-10V DALI PUSH

REF N° 697 70 050 min 2W max 45W PHASE DIM

230V/50Hz -  - current controlled  
 -  - IP20 - 1050mA - dimmable

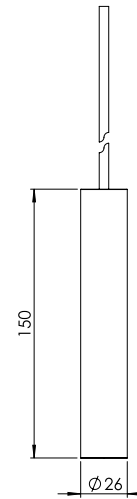

### INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

### BEAM ANGLES

**STANDARD** (included) beam angle 12°  
REF N° 203 20 008 (option) beam angle 8°