

TECHNICAL DATA SHEET


200CENT ROUND 750LM PENDANT IP20

INDOOR - INTERNO - INNERBEREICH - INTERIEUR - INTÉRIEUR - INTERIOR

Fix (not adjustable) 0° - 0°

Pendant

Material: Aluminium



200CENT ROUND PENDANT 750LM CRI 92




2400°K	2700°K	3000°K	4000°K
REF N° 518 29 530	REF N° 518 29 930	REF N° 518 29 830	REF N° 518 29 730

6,2 W - 750LM - 2 step MacAdam - **A+**
Serial wiring -  -  -  - 
Requires remote LED driver - 250mA
Standard beam angle 36°

REMOTE LED DRIVER ON/OFF

REF N° 697 00 040 min.2W max. 30W

REF N° 697 00 080 min.27W max. 67W

230V/50Hz -  - current controlled
 -  - IP20 - 250mA - not dimmable

REMOTE LED DRIVER DIM

REF N° 697 60 040 min.3W max. 30W


1-10V DALI PUSH

REF N° 697 30 070 min 33W max 65W DALI

REF N° 697 60 080 min 27W max 67W 1-10V PUSH

REF N° 697 72 020 min 6W max 12,5W PHASE DIM

230V/50Hz -  - current controlled
 -  - IP20 - 250mA - dimmable

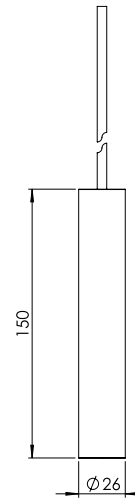

INSTALLATION KIT

REF N° 681 01 003 200Cent pendant cable black 3m

REF N° 681 02 003 200Cent pendant cable white 3m

REF N° 681 01 006 200Cent pendant cable black 6m

REF N° 681 02 006 200Cent pendant cable white 6m

BEAM ANGLES

STANDARD (included) beam angle 36°