


**General**

Location: Interior  
 Class: CE (Class I)  
 IP-rating: IP20  
 Driver included: Yes  
 Installation orientation: Only compatible with one of the Slot profiles + magnetic rail

Lamp included: Yes  
 Dimmable: Yes  
 Dimming method: Mains dimmable, 1-10V, DALI

Dimensions (mm): Ø: 38mm L: 75mm

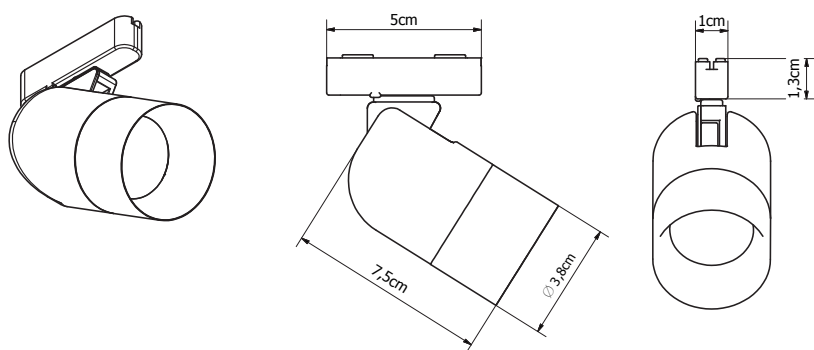

**Models**



**CODE USE THE CODE CONFIGURATOR**  
**Main material:** Aluminium powder coated / anodised

White Line Dotsi 38mm **2700K**

2700K - CRI>97  
 8W - 450lm - 24V



**CODE USE THE CODE CONFIGURATOR**  
**Main material:** Aluminium powder coated / anodised

White Line Dotsi 38mm **3000K**

3000K - CRI>97  
 8W - 480lm - 24V




**CODE USE THE CODE CONFIGURATOR**  
**Main material:** Aluminium powder coated / anodised

White Line Dotsi 38mm **4000K**


4000K - CRI>97  
 8W - 530lm - 24V

**Summary dotsi basic parts**

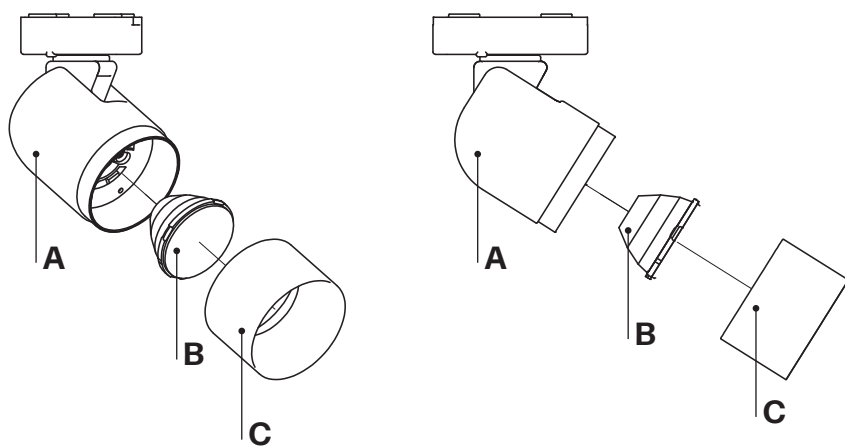

- A: Dotsi housing
- B: Dotsi lens
- C: Dotsi frontring

**Frontrings**

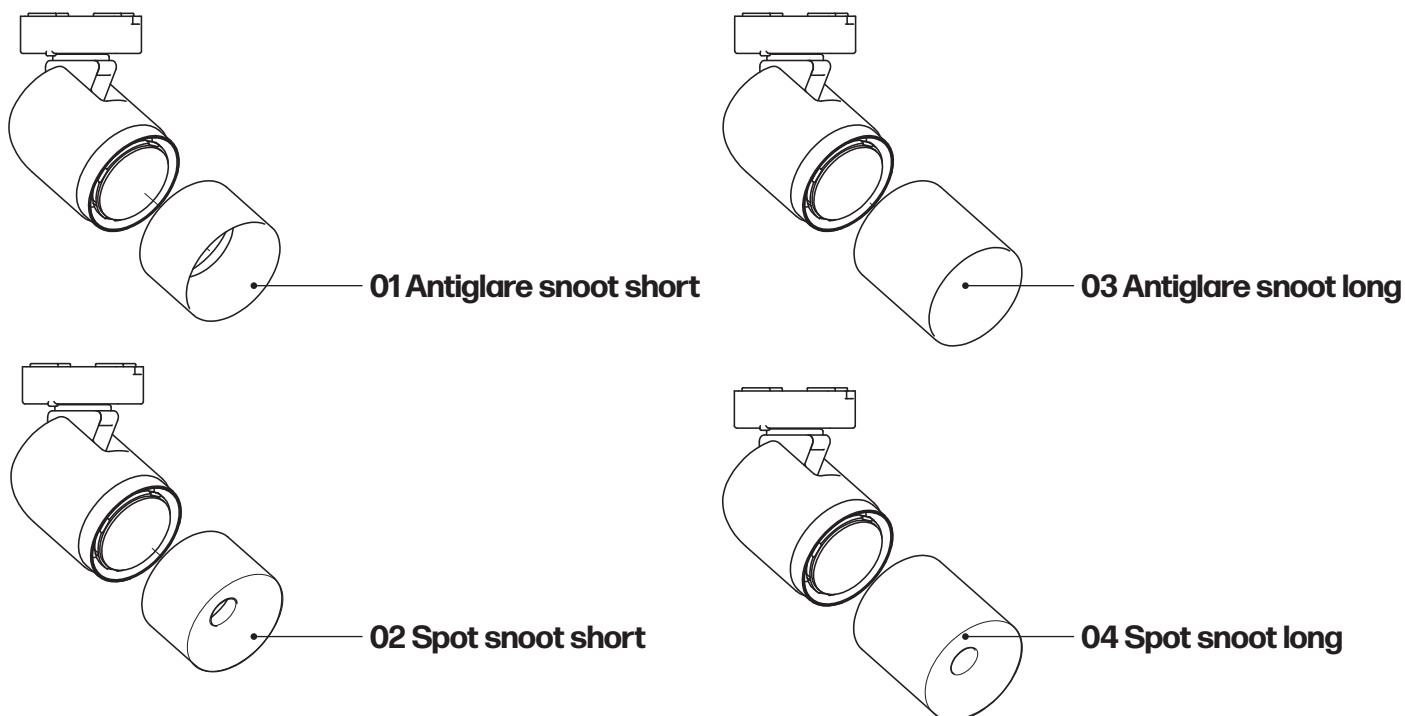

**Required option**

- |                   |                                   |
|-------------------|-----------------------------------|
| WL DOTSI 01LENS01 | Lens for Dotsi ø38mm - 15°        |
| WL DOTSI 01LENS02 | Lens for Dotsi ø38mm - 20°        |
| WL DOTSI 01LENS03 | Lens for Dotsi ø38mm - 30°        |
| WL DOTSI 01LENS04 | Lens for Dotsi ø38mm - 40°        |
| WL DOTSI 01LENS05 | Lens for Dotsi ø38mm - 45x20°     |
| WL DOTSI 01LENS06 | Lens for Dotsi ø38mm - Wallwasher |