

ALPS TELE ADJUSTABLE PULL OUT PLASTER IN SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER
DLD/ALPSTELEP62




DETAILS

Tilt	0-90°
Rotation	355°
IP Rating	IP20
Class	I
Standards	CE / ROHS
Fire Rated	60+ minutes
Material	Aluminium
Fixation	Plaster-in recessed
Warranty	5 Years


KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Dim to dark with our range of fully tested drivers

DIMENSIONS

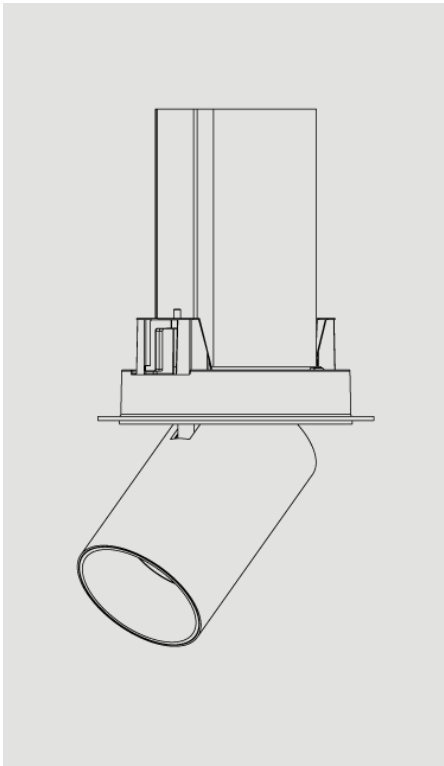

Light Engine: Ø62mm, H.100mm
Aperture: Ø62mm
Plaster Kit: Ø120mm H.137mm
Total Height: 234mm
Cutout: Ø100mm

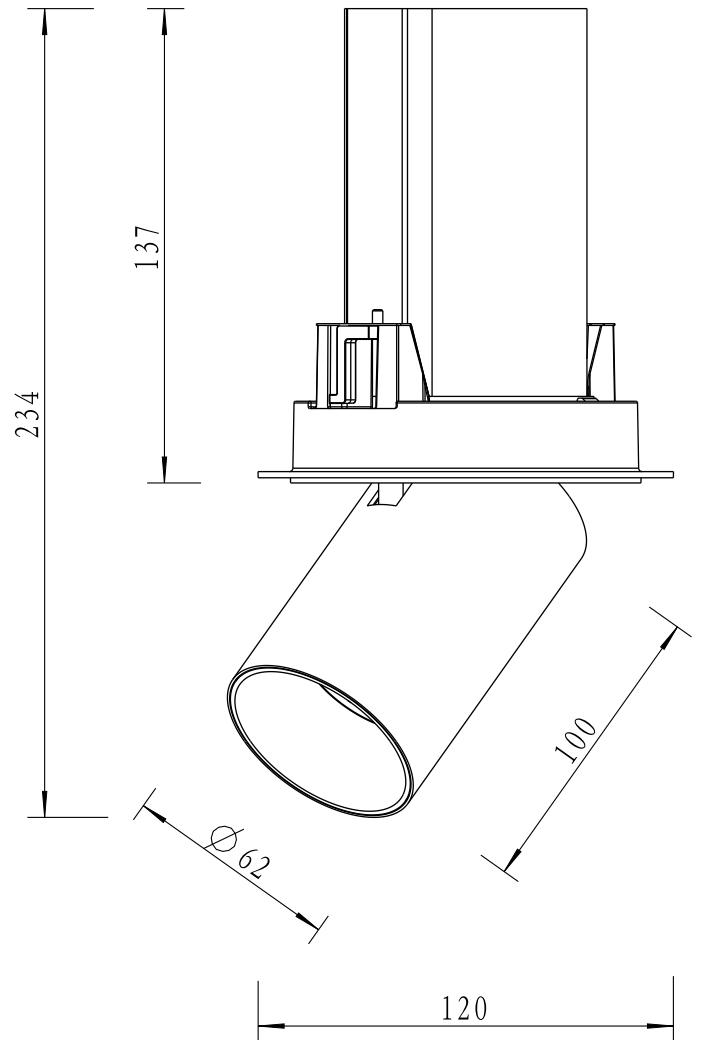

TRUE COLOUR 98 CRI

ALPS TELE ADJUSTABLE PULL OUT PLASTER IN SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER
DLD/ALPSTELEP62



PRODUCT CODE CONSTRUCTION

PRODUCT CODE PREFIX	FINISH	BEAM ANGLE	LIGHT TEMP. CCT	INTEGRATED DRIVER
DLD/ALPSTELEP62	W	36D	27K	TRI
<small>SIZE</small> P Plaster-in <small>SIZE</small> 62 Ø62mm R Recessed 75 Ø75mm 88 Ø88mm	W White B Black G Grey	15D 15° 24D 24° 36D 36°	27K 2700K 30K 3000K 40K 4000K	ND Non dim. MD Mains dim. 010 0-10V dim. D DALI dim.

SPECIFICATION

	2700K			3000K			4000K		
BEAM ANGLE	15°	24°	36°	15°	24°	36°	15°	24°	36°
System Lumen Output				1100 lm					
System Efficacy Lm/W				73 lm/W					
Binning SDCM				<3					
CRI				98					
R9				95					
TM30 Rf Rg				Rf 95 Rg 95					
UGR				11					
Cut-Off Angle				38°					
LED Type	Philips Lumileds COB LED								
LED Lifetime (Ave.)	50,000 hrs								
POWER									
Wattage	15W								
Voltage	220-240V								
Current	350mA								
DRIVER									
Supported Protocols	Mains Dim / 0-10V / DALI								
Dim to Dark	0.1% Lux								
Distance from Luminaire	20m maximum								
Wiring	-								
Emergency	Emergency packs available								

01189 889414

enquiries@dld-contract.co.uk

dld-contract.co.uk

DLD Contract Ltd
Unit 9 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH