

P100 PLEXI LED

SURFACE and PENDANT LUMINAIRES > P100

Technical Features

- Steel body with flat form, electrostatically painted in white colour.
- High efficient opal PMMA, aluminium louvre with direct or direct / indirect light distribution or aluminium WW reflector selection.
- UGR ≤ 19 for 2M Louvre versions.
- High efficient opal PMMA for plexi version and aluminium louvre with high efficient satin PMMA cover for louvre version.
- Last generation high efficient LED CHIP.
- Pure light without IR/UV radiation.
- Connection for operation on 230V-50/60Hz.

High Efficiency

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B10).

High Output

- Operation life: 50,000 hours with efficiency > 80% of the initial luminous flux (L80B50).

Upon request:

- Body and accessories in various colours (RAL)
- Connection for emergency lighting system, for one or three hours.

Product Code: P100_PLX_LED

Version

Dimmer

Νόρμες



Περιγραφή

- Steel body.
- High efficient opal PMMA.
- Suspension and power supply not included.
- CRI: min. 80 / SDCM: 3
- Luminous Efficacy:
- High Efficiency:
145 Lm/Watt 3000K
155 Lm/Watt 4000K
- High Output:
136 Lm/Watt 3000K
146 Lm/Watt 4000K


Χαρακτηριστικά

Γενικά



Catalogue Chapter	SURFACE and PENDANT LUMINAIRES
Product Family	P100
Lamp Category	LED
Fixation	SURFACE or PENDANT
IP	IP 40
Διαστάσεις	580mm - 1480mm

Σχέδια

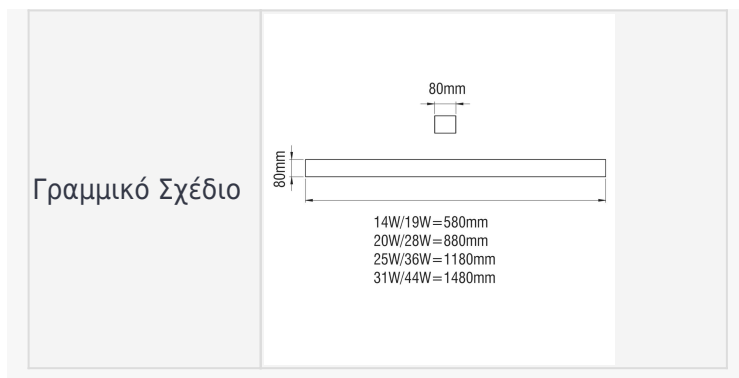




P100 PLEXI LED



1480mm VERSIONS

-  P101 Plexi LED 44W Warm 1480
-  P101 Plexi LED 44W Neutral 1480

SINGLE ADJUSTABLE SUSPENSION (2 pieces for up to 3m profile)

-  Single Suspension 500
-  Single Suspension 1000
-  Single Suspension 1500
-  Single Suspension 2000
-  Single Suspension 3000