


line.s^{new}

71


material	aluminium coated or anodised
voltage	48Vdc
circuits	1 circuit: 1x15A + databus 2 circuits: 2 x 15A
dimming	DALI, 0-10V, 1-10V, SwitchDIM, Casambi, Google Home & Amazon Alexa* *from Q3 2020

IP20    

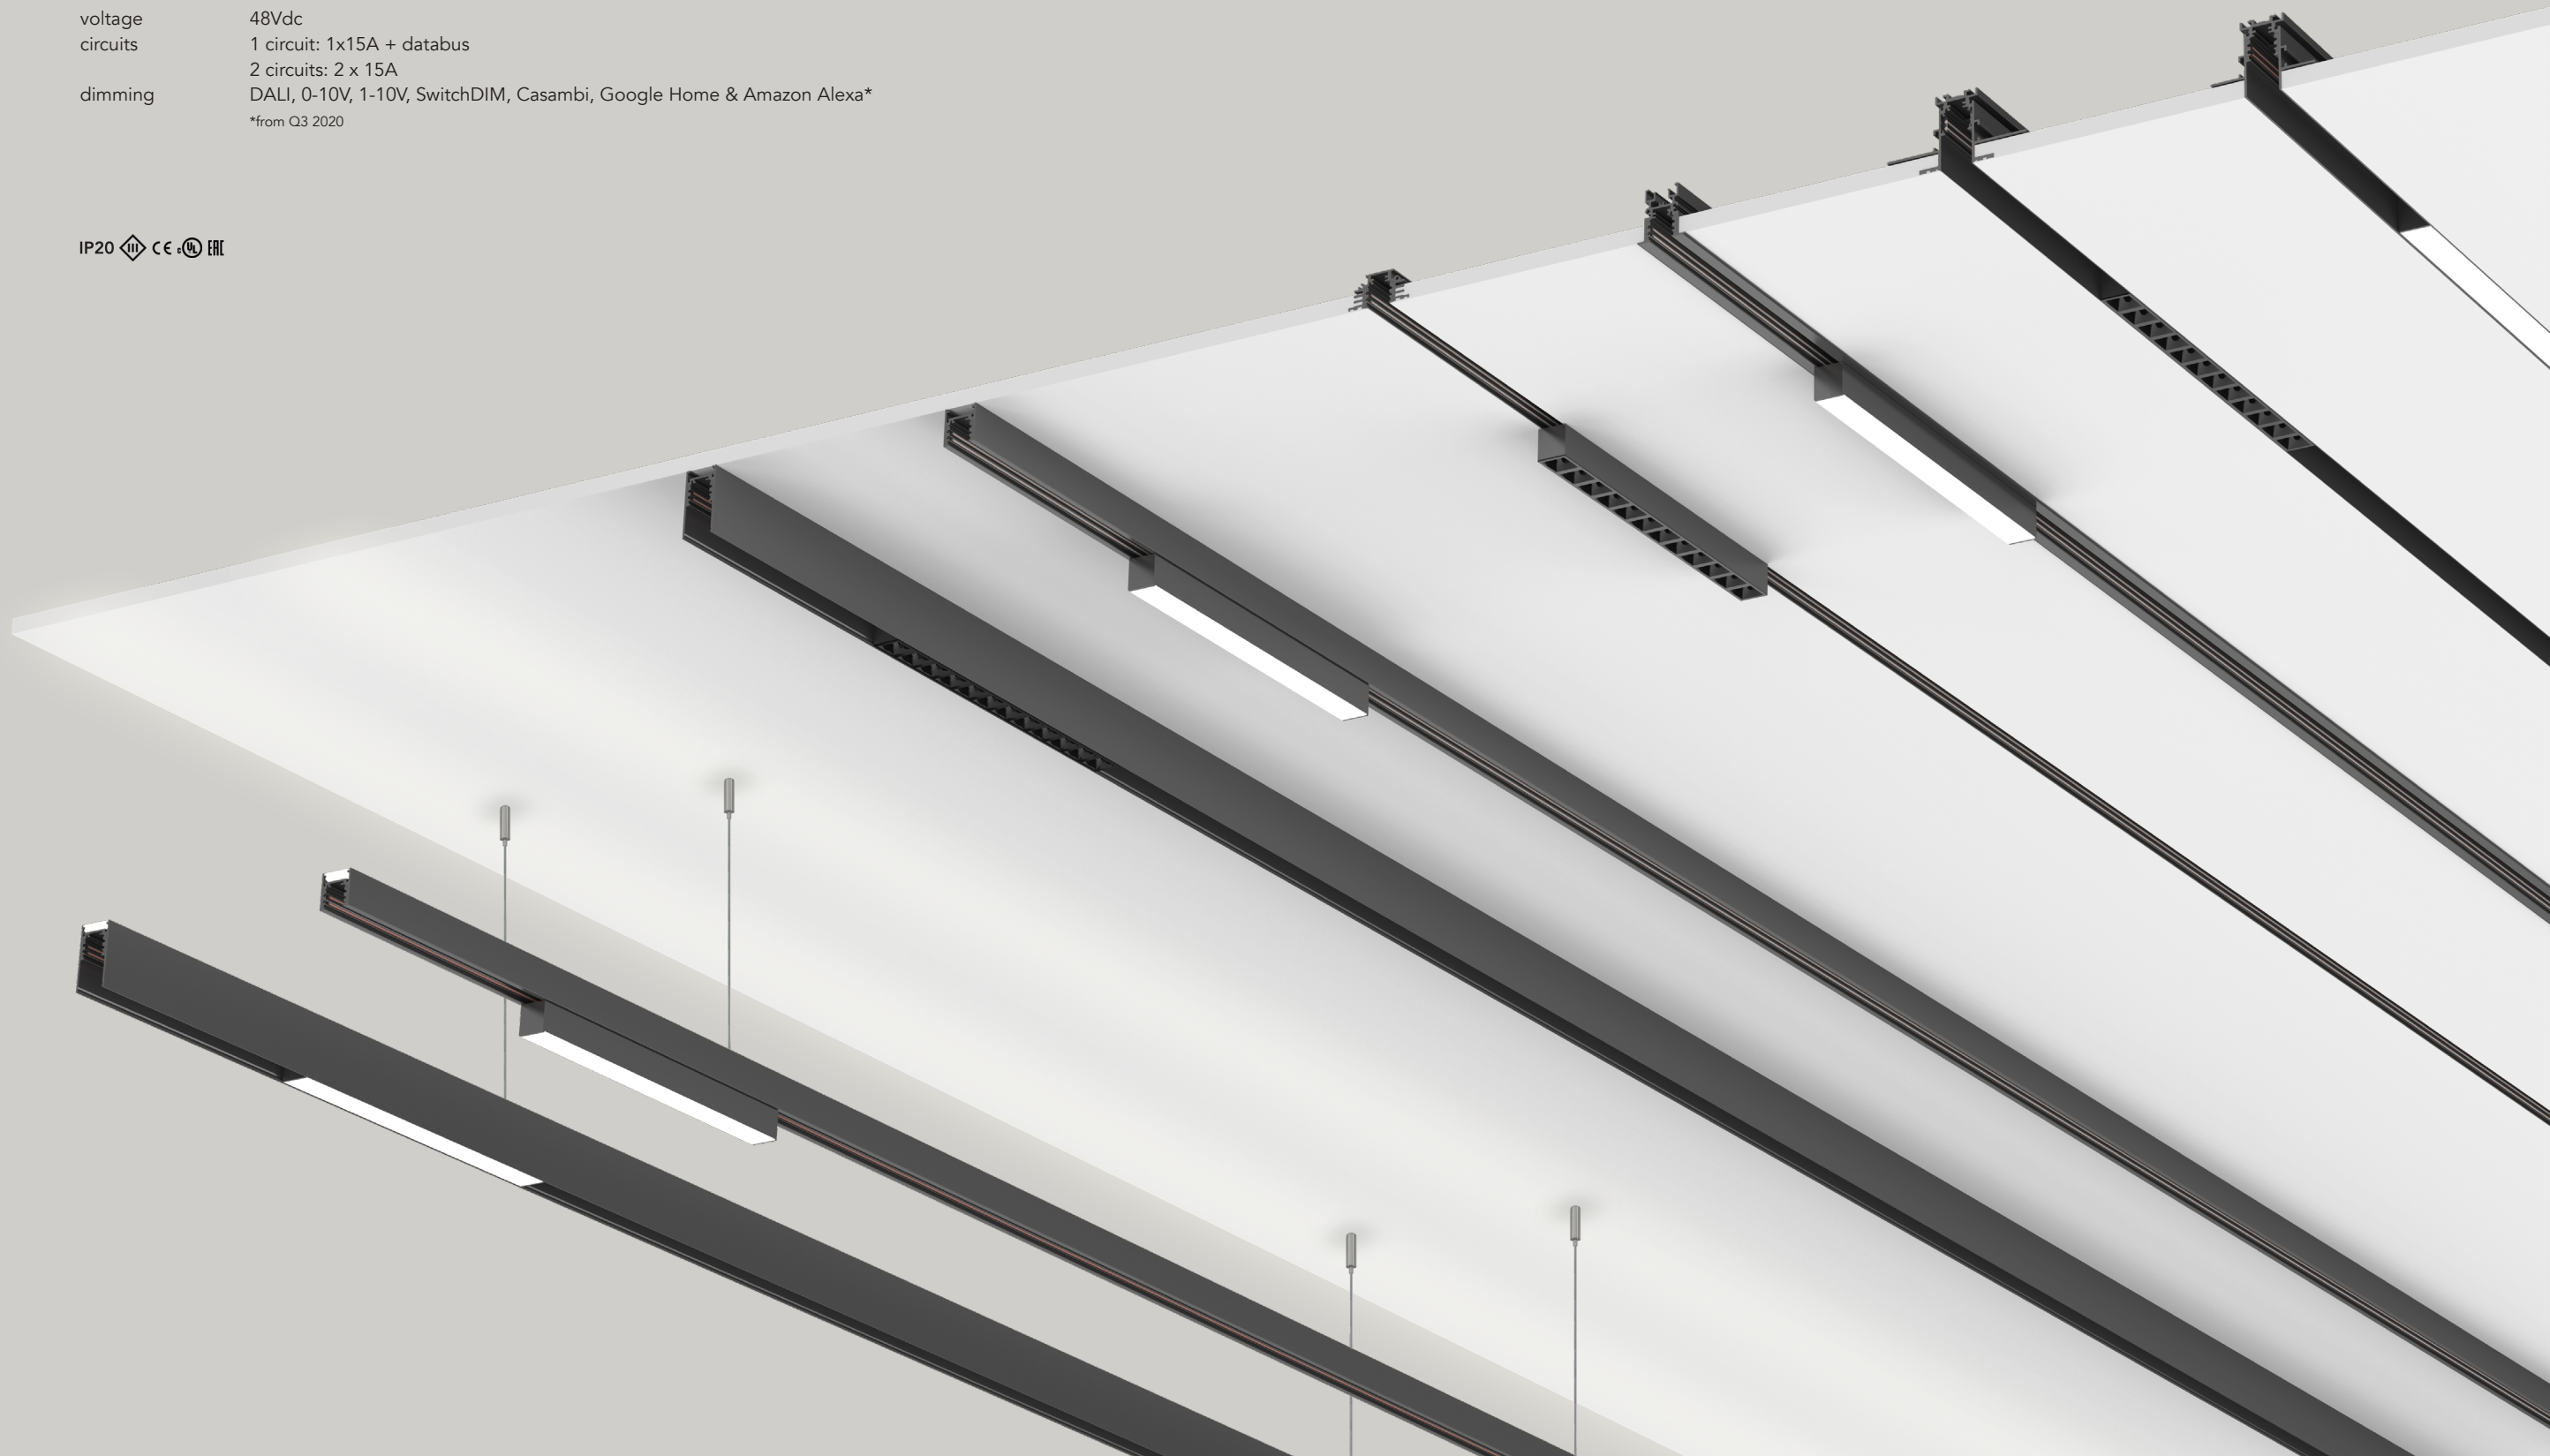


line.s^{new}


Surface mount

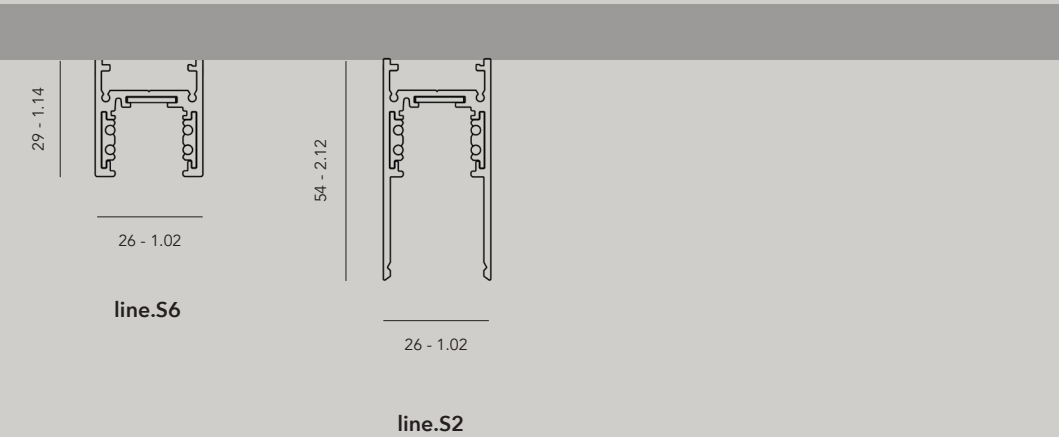

Pendant

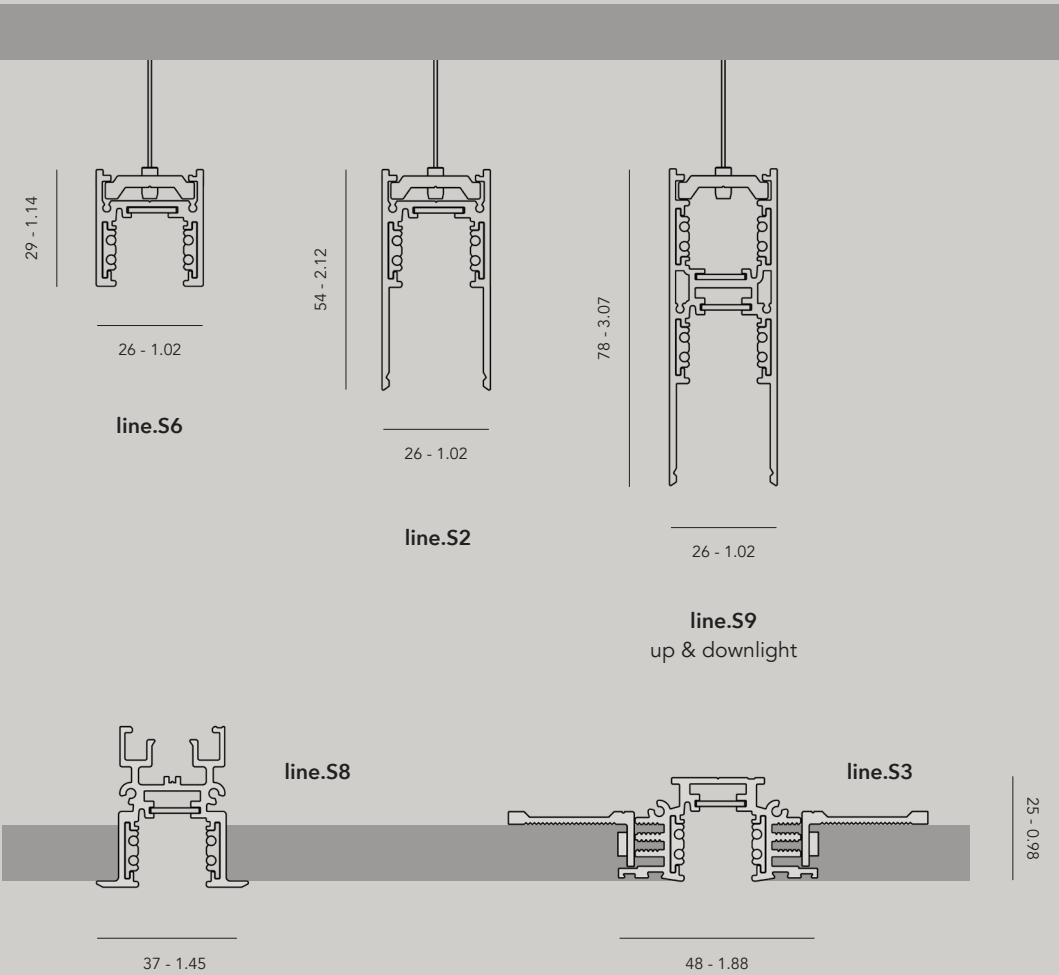


Recessed

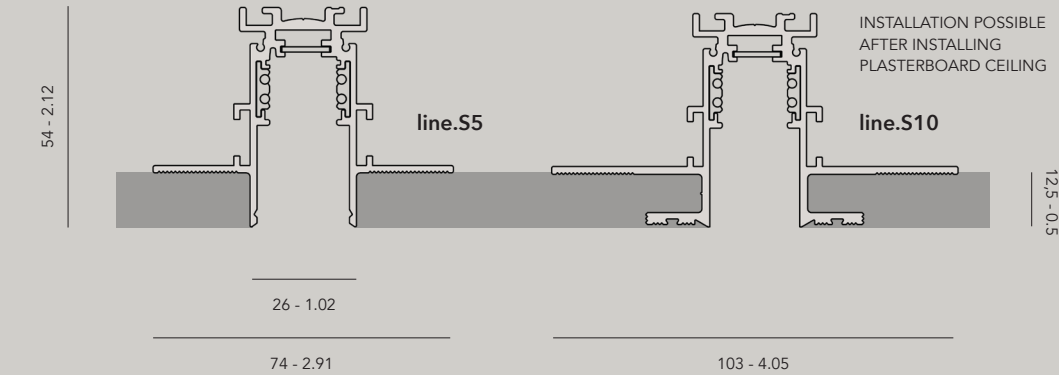


Order Code	AA	Finish
10002.AA00.BBBB line.S2	01	black
10003.AA00.BBBB line.S3	02	white
BBBB	Length	
10005.AA00.BBBB line.S5	0300	300 mm
10006.AA00.BBBB line.S6	0500	500 mm
10008.AA00.BBBB line.S8	1000	1000 mm
10009.AA00.BBBB line.S9 pendant	2000	2000 mm
10010.AA00.BBBB line.S10	3000	3000 mm
10052.AA00.BBBB line.S2 pendant	xxxx	xxxx mm (custom length)
10056.AA00.BBBB line.S6 pendant		
10062.AA00.BBBB line.S2 pendant uplight		


track set-up & accessories

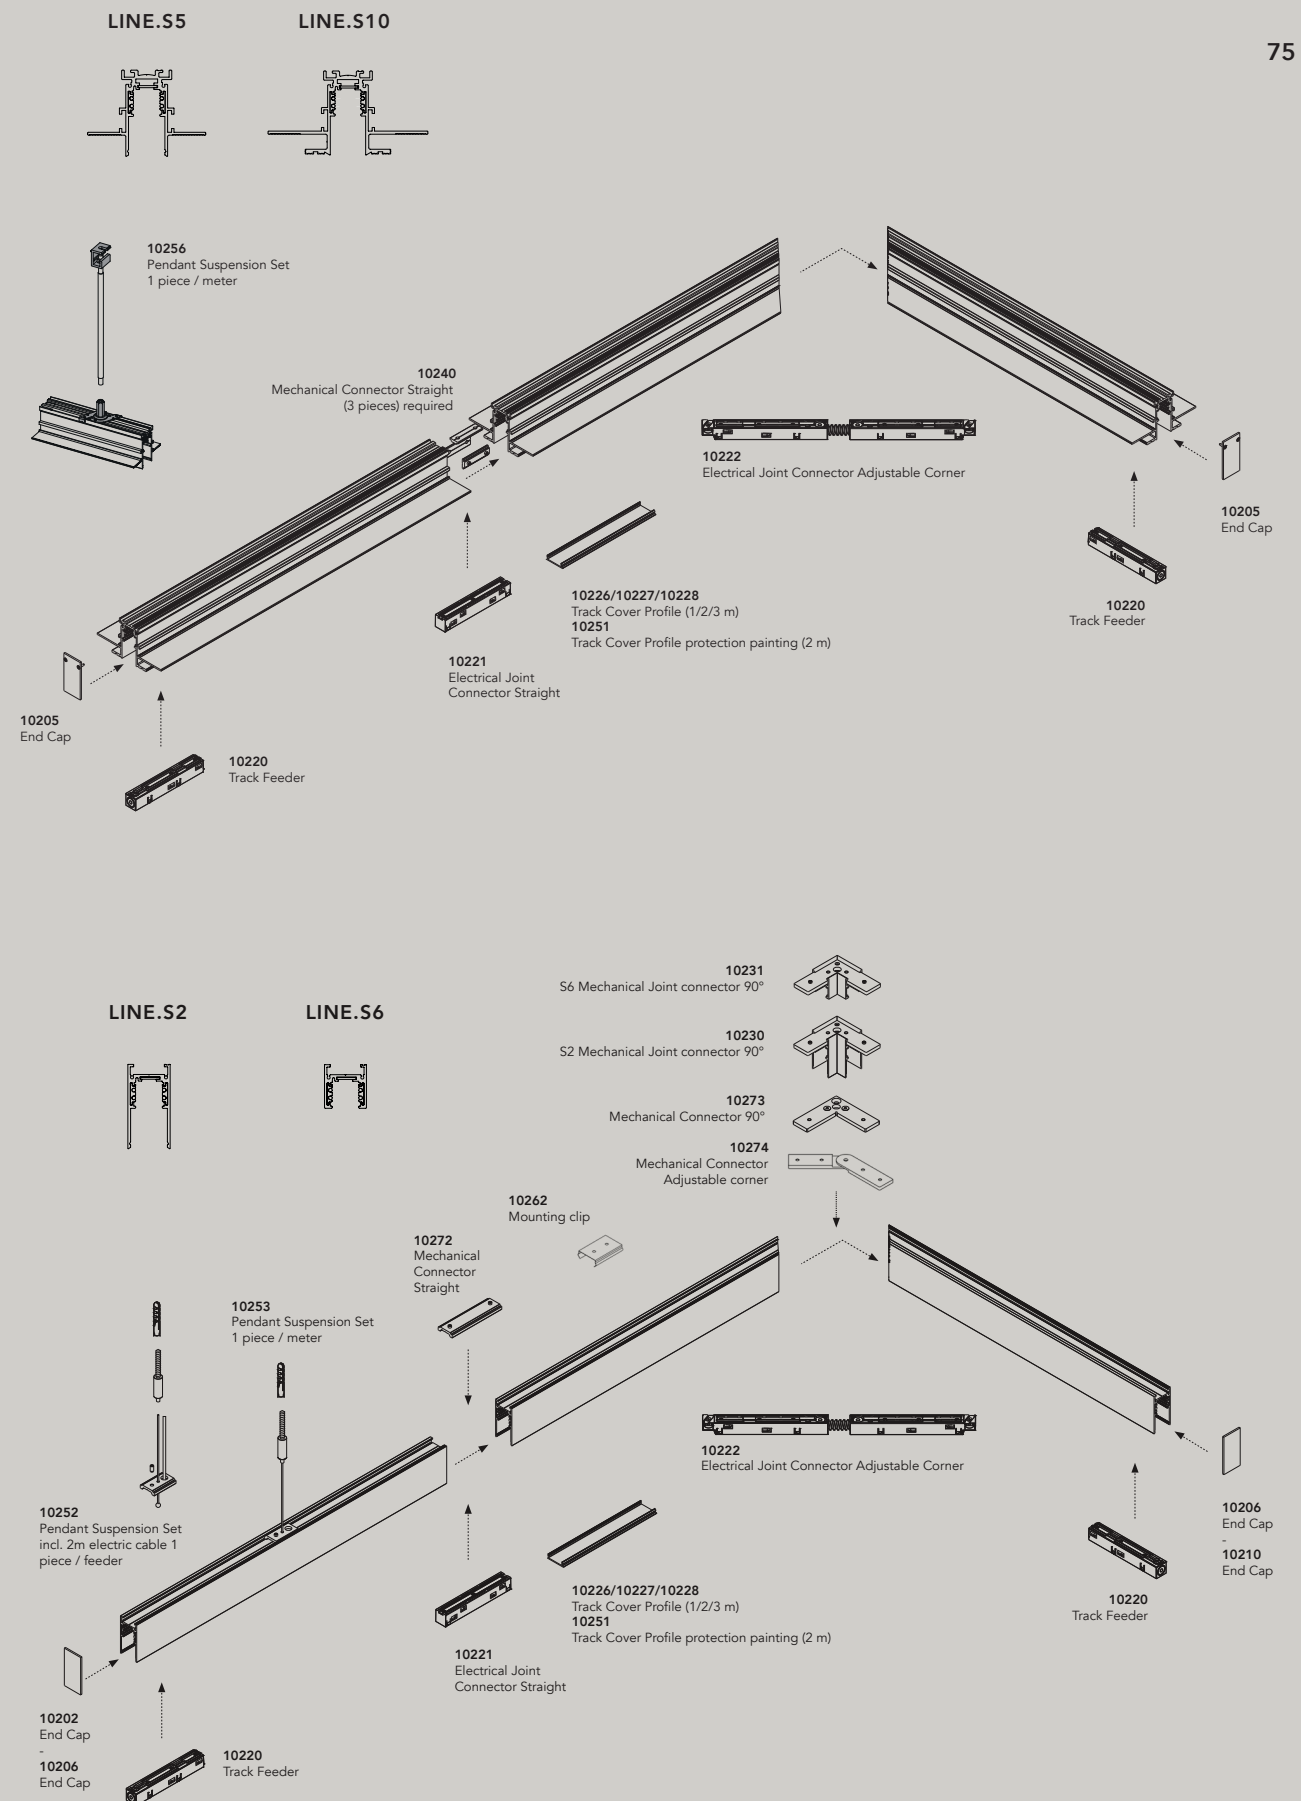



LINE.S8

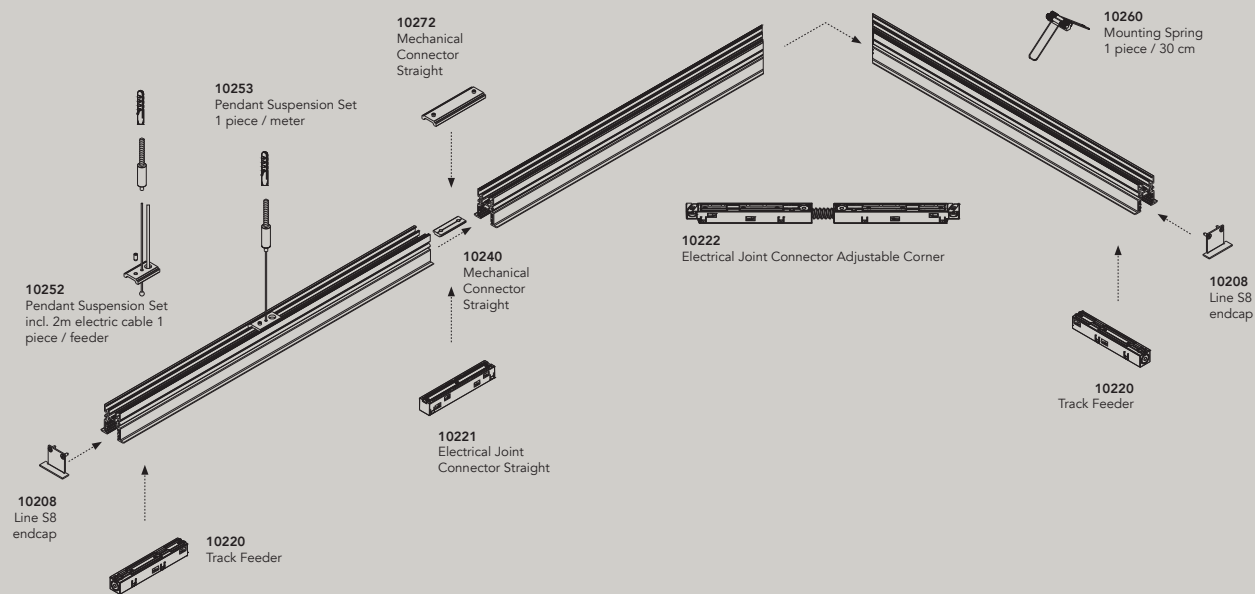

LINE.S3

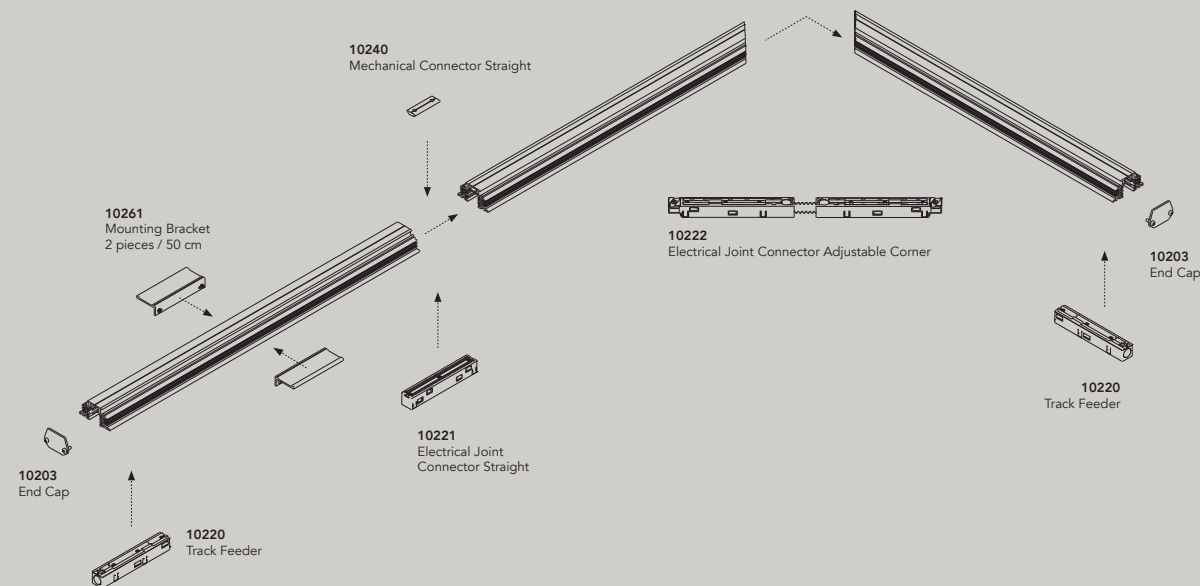

LINE.S9

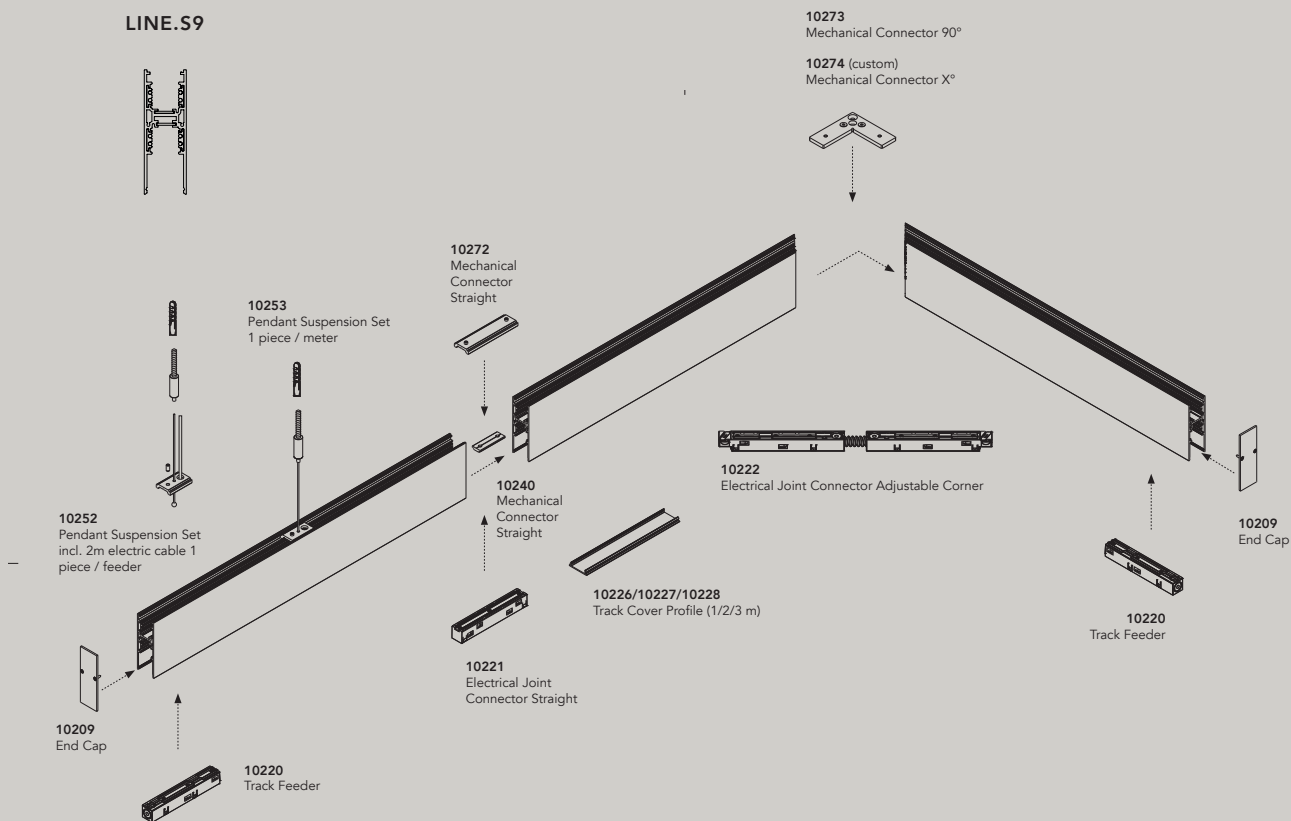

48V Power supplies & controls

Order Code

90101.0000
90102.0000
90103.0000
90104.0000



Power supply, 48VDC, 60W - 90-305 VAC/50-60Hz - CE - cUL certified
Power supply, 48VDC, 100W - 90-305 VAC/50-60Hz - CE - cUL certified
Power supply, 48VDC, 150W - 90-305 VAC/50-60Hz - CE - cUL certified
Power supply, 48VDC, 240W - 90-305 VAC/50-60Hz - CE - cUL certified

90110.0000
90111.0000

Power supply, 48VDC, 60W - 120-240VAC/50-60Hz - CE - cUL listed
(Slim size - fits in track Line S2, S5 & S10)
Power supply, 48VDC, 100W - 120-240VAC/50-60Hz - CE - cUL listed

90001.0000
90002.0000
90003.0000

0/1-10V to dali interface (up to 15 fixtures) 24vdc. *dali expander for more fixtures
Switch dim to dali interface (up to 64 fixtures) and DALI expander 200mA 100-240vac
Dali opto insulator for galvanic isolation


90010.0000
90011.0100
90011.0200
90012.0000
90013.0100
90013.0200

casambi to dali interface for remote installation 48Vdc (up to 4 groups, max 50 fixtures)
casambi to dali interface for track Line S installation 48Vdc (1 group , max 50 fixtures) black
casambi to dali interface for track Line S installation 48Vdc (1 group , max 50 fixtures) white
casambi push button interface (up to 4 push buttons) 110-240vac
casambi wall remote control wireless (up to 4 groups) black
casambi wall remote control wireless (up to 4 groups) white



°knick

materials	aluminium coated or anodised / PC
weight	1070gr / 2.35-lb
voltage	48 Vdc
wattage	8,2W - 16,8W (high output)
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
	*from Q3 2020

IP20    ENEC

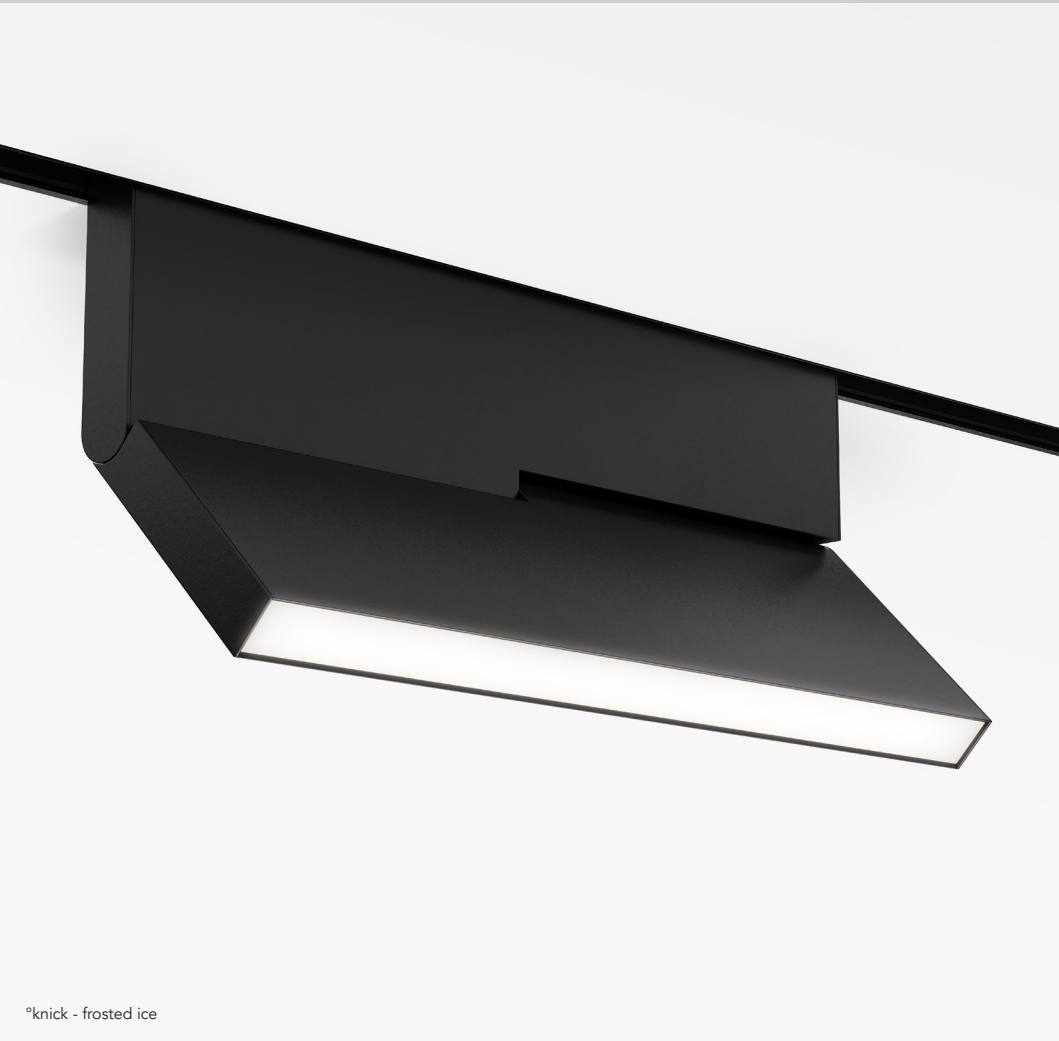

°knick - frosted ice

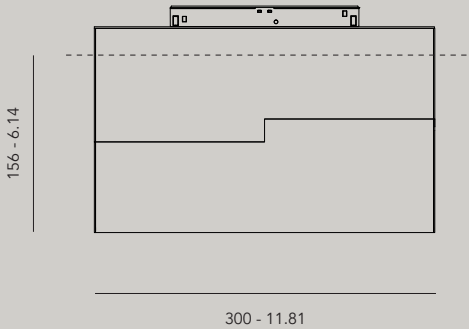

°knick - frosted ice



°knick - monopoint - frosted ice

Order Code

- 10500.AA00.BBBB.CCC.DD** knick
- 10501.AA00.BBBB.CCC.DD** knick high output
- 10503.AA00.BBBB.CCC.DD** knick monopoint
- 10504.AA00.BBBB.CCC.DD** knick monopoint high output

AA	Finish
01	black
02	white
22	aluminum anodised
23	brass anodised
25	bronze anodised
26	dark bronze anodised

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories



- 10101 line S plasterkit knick/out

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°knick medium

materials aluminium coated or anodised / PC
weight 718 gr / 1.58 lb
voltage 48 Vdc
wattage 19W
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20    ENEC

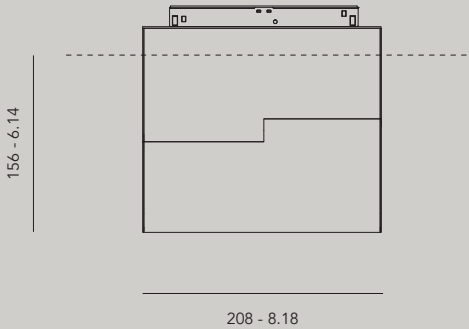

Order Code
10510.AA00.BBBB.CCC.DD knick medium
10513.AA00.BBBB.CCC.DD knick medium monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	
23	brass anodised	
25	bronze anodised	
26	dark bronze anodised	
BBBB	Light	
9527	cri >95, 2700K	
9530	cri >95, 3000K	
9540	cri >95, 4000K - on request	
CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
250	25° black glossy louvre	1800 lm
350	35° black glossy louvre	1800 lm
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	


Accessories
10113 line S plasterkit knick m & out m

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°knick small^{new}

materials	aluminium coated or anodised / PC
weight	260gr / 0.57lb
voltage	48 Vdc
wattage	9,6 W
ugr	louvre <19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
	*from Q3 2020


IP20    ENEC

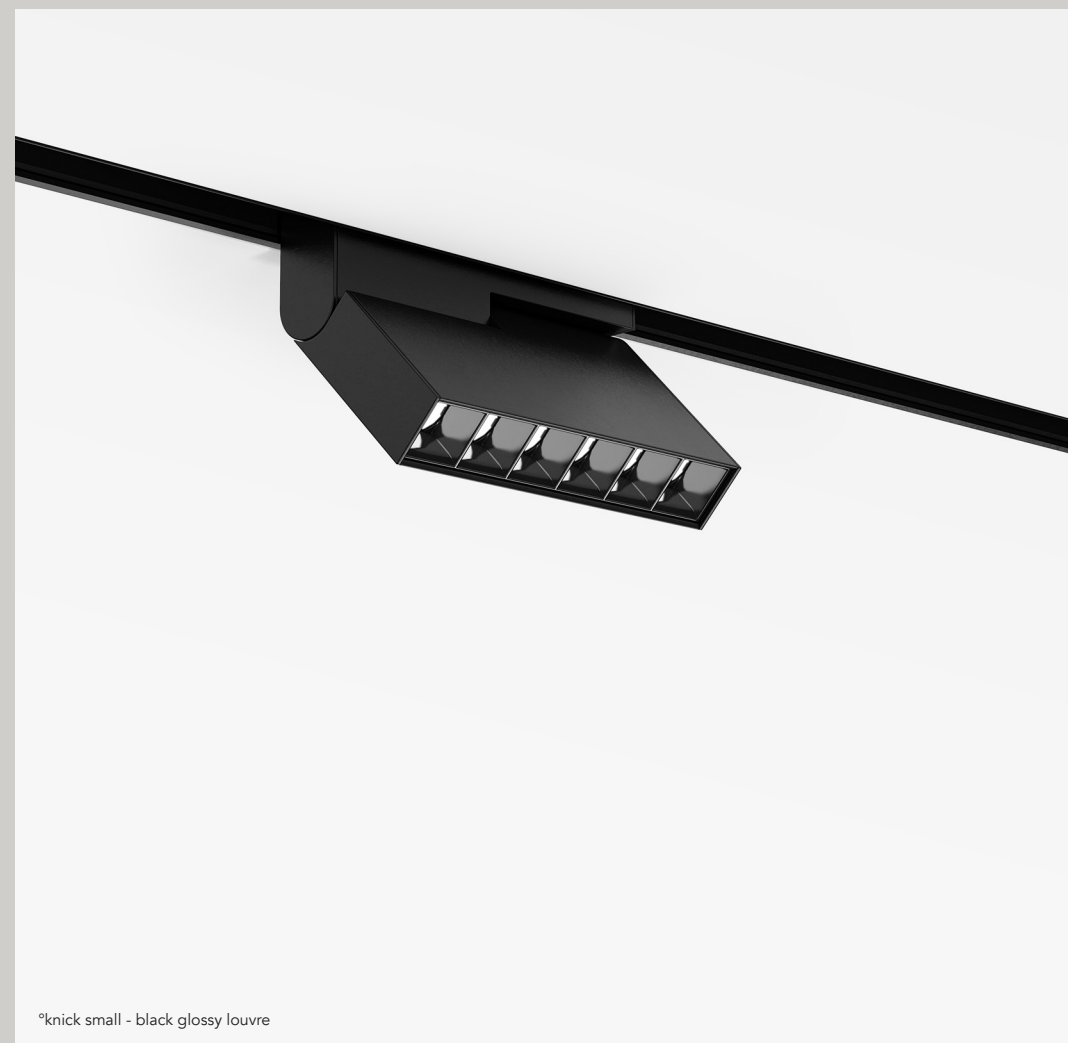

°knick small - black glossy louvre

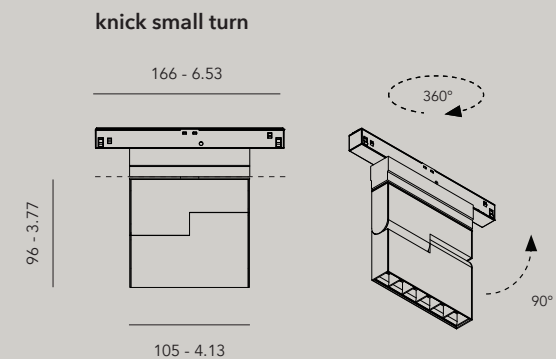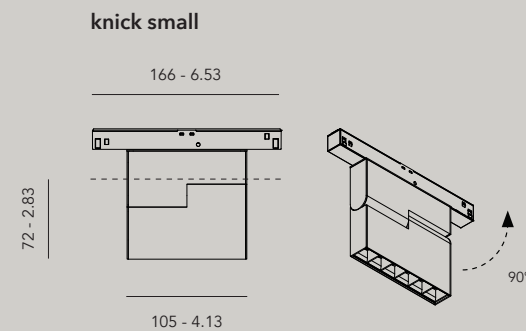

°knick small - frosted ice

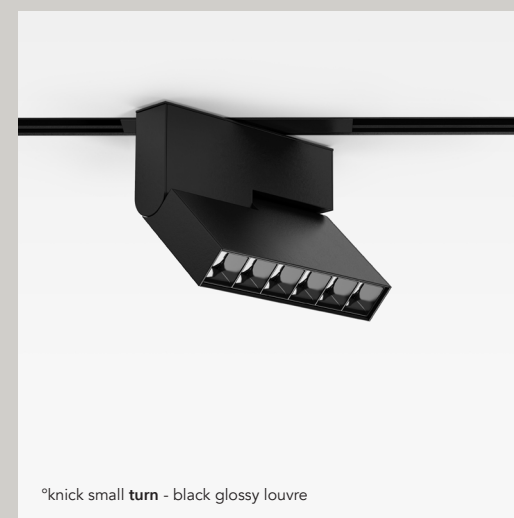

°knick small **turn** - black glossy louvre

Order Code

- 10600**.AA00.BBBB.CCC.DD knick small
10603.AA00.BBBB.CCC.DD knick small monopoint

10610.AA00.BBBB.CCC.DD knick small turn
10613.AA00.BBBB.CCC.DD knick small turn monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	
23	brass anodised	
25	bronze anodised	
26	dark bronze anodised	
BBBB	Light	
9527	cri >95, 2700K	
9530	cri >95, 3000K	
9540	cri >95, 4000K - on request	
CCC	Optic	Output*
001	frosted ice	500lm - 220cd
002	microprism	550lm - 330cd
251	25° + frosted ice	550lm - 460cd
252	25° + microprism	580lm - 760cd
105	10° black glossy louvre	895lm - 18340cd
250	25° black glossy louvre	680lm - 2660cd
350	35° black glossy louvre	680lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories

- 10102 line S plasterkit knick small (turn)

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.




°knick small - dark bronze anodised - black glossy louvre



°knick small - brass anodised - black glossy louvre



°knick small - bronze anodised - black glossy louvre

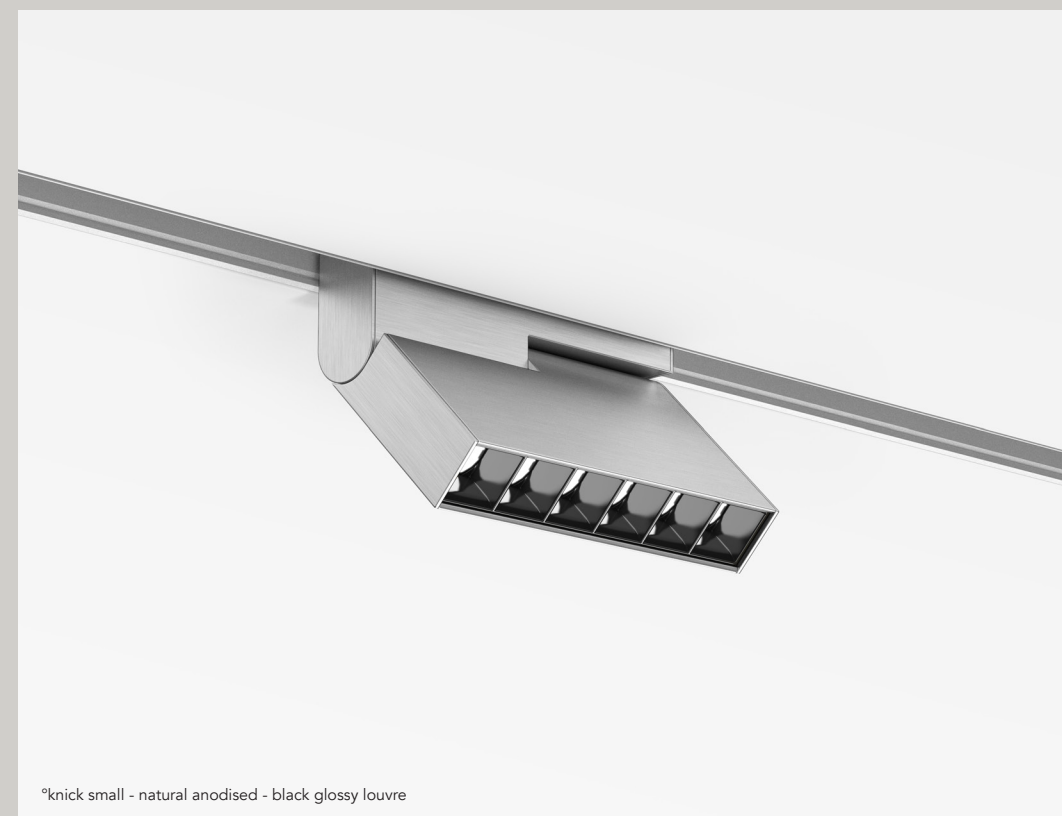

°knick small - natural anodised - black glossy louvre

°in

new

materials

weight

voltage

dimming

aluminium coated or anodised / PC

175gr - 0,38lb for 286 mm

48 Vdc

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020


IP20











ETL

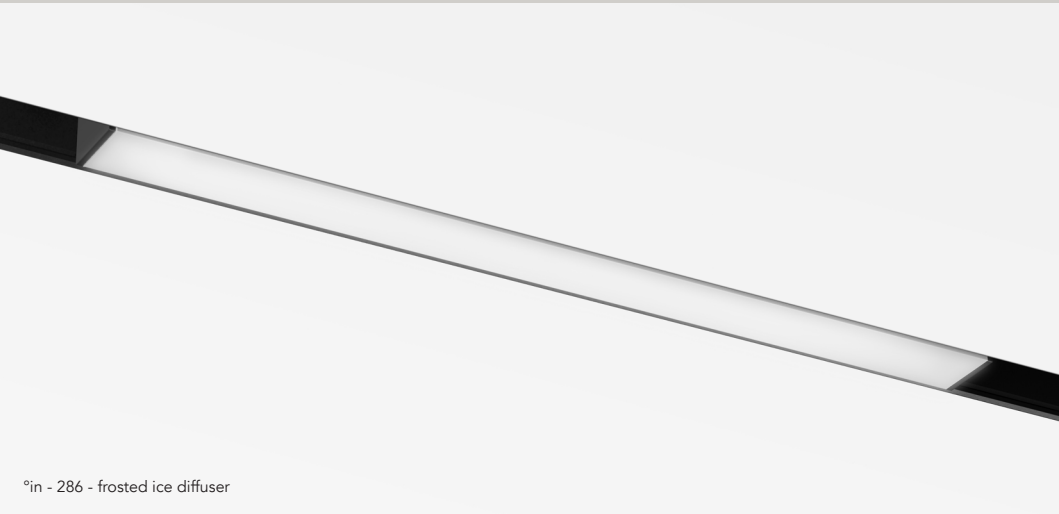

Length	
mm – inch	
1144 - 45.03	
858 - 33.77	
572 - 22.51	
286 - 11.25	
143 - 5.62	



length (mm)	beam °	color K	CRI ra	candela cd	lumen lm	power W	efficacy lm/W	glare UGR
frosted ice								
143	106	3000	95	125	342,5	4,1	84	<30
286	106	3000	95	250	685	8,2	84	<30
572	106	3000	95	500	1370	16,4	84	<30
858	106	3000	95	750	2055	24,6	84	<30
1144	106	3000	95	1000	2740	32,8	84	<30
microprism								
143	90	3000	95	200	425	4,1	104	<30
286	90	3000	95	400	850	8,2	104	<30
572	90	3000	95	800	1700	16,4	104	<30
858	90	3000	95	1200	2550	24,6	104	<30
1144	90	3000	95	1600	3400	32,8	104	<30
frosted ice high output								
143	106	3000	95	248	700	8,4	83	<31
286	106	3000	95	496	1400	16,8	83	<31
microprism high output								
143	90	3000	95	420	910	8,4	108	<31
286	90	3000	95	840	1820	16,8	108	<31
spot								
143	20	3000	>95	2210	390	6,2	63	<11
286	20	3000	>95	4350	850	13	65	<11
572	20	3000	>95	8700	1700	26	65	<11
858	20	3000	>95	13050	2550	39	65	<11
1144	20	3000	>95	17400	3400	52	65	<11
143	35	3000	>95	890	400	6,2	65	<15
286	35	3000	>95	2040	880	13	68	<15
572	35	3000	>95	4080	1760	26	68	<15
858	35	3000	>95	6120	2640	39	68	<15
1144	35	3000	>95	8160	3520	52	68	<15
143	60	3000	>95	510	340	6,2	55	<16
286	60	3000	>95	790	750	13	58	<16
572	60	3000	>95	1580	1500	26	58	<16
858	60	3000	>95	2370	2250	39	58	<16
1144	60	3000	>95	3160	3000	52	58	<16
spot high output								
143	20	3000	>95	3100	595	9	66	<11
286	20	3000	>95	6200	1190	18	66	<11
143	35	3000	>95	1420	550	9	61	<15
286	35	3000	>95	2840	1100	18	61	<15
143	60	3000	>95	735	550	9	61	<16
286	60	3000	>95	1470	1100	18	61	<16

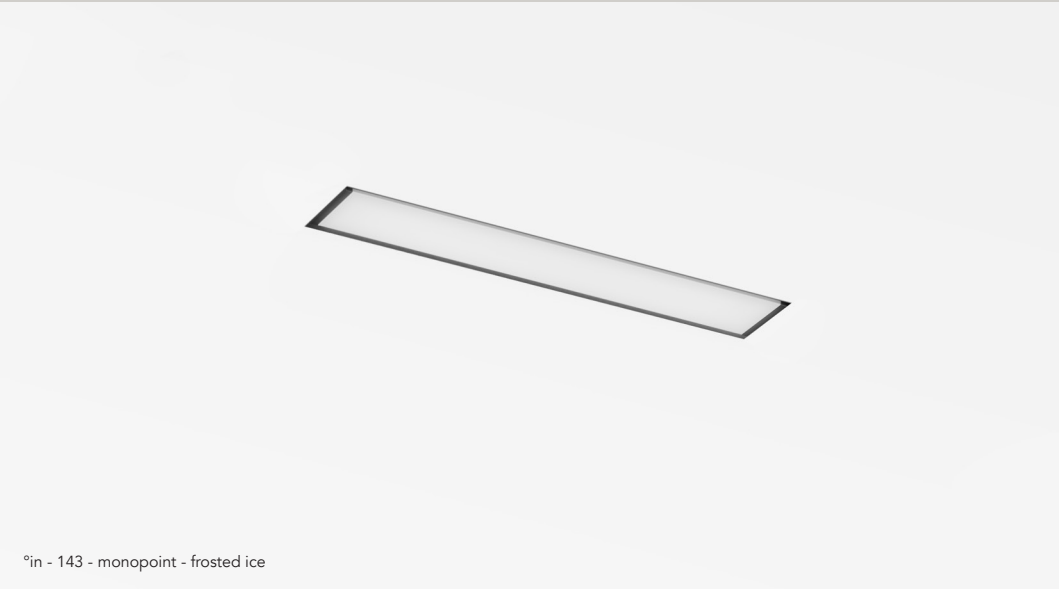

Order Code

- 10701.AA00.BBBB.CCC.DD in 143 mm
- 10702.AA00.BBBB.CCC.DD in 143 mm high output
- 10703.AA00.BBBB.CCC.DD in 143 mm monopoint
- 10704.AA00.BBBB.CCC.DD in 143 mm monopoint high output

- 10711.AA00.BBBB.CCC.DD in 286 mm
- 10712.AA00.BBBB.CCC.DD in 286 mm high output
- 10713.AA00.BBBB.CCC.DD in 286 mm monopoint
- 10714.AA00.BBBB.CCC.DD in 286 mm monopoint high output

- 10721.AA00.BBBB.CCC.DD in 572 mm
- 10722.AA00.BBBB.CCC.DD in 572 mm high output
- 10723.AA00.BBBB.CCC.DD in 572 mm monopoint
- 10724.AA00.BBBB.CCC.DD in 572 mm monopoint high output

- 10731.AA00.BBBB.CCC.DD in 858 mm
- 10732.AA00.BBBB.CCC.DD in 858 mm high output

- 10741.AA00.BBBB.CCC.DD in 1144 mm
- 10742.AA00.BBBB.CCC.DD in 1144 mm high output

Other lenghts on request (a multiple of 286 mm)

AA Finish

- 01 black
- 02 white

BBBB Light

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K
- 9540 cri >95, 4000K - on request
- 90TW cri >90, tunable white - on request only for frosted ice & microprism

CCC Optic

- 001 frosted ice
- 002 microprism
- 205 20° **black glossy** louvre
- 355 35° black glossy louvre
- 605 60° black glossy louvre
- 206 20° **black matt** louvre
- 356 35° black matt louvre
- 606 60° black matt louvre
- 207 20° **white matt** louvre
- 357 35° white matt louvre
- 607 60° white matt louvre

DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)

Accessories

- 10108 line S plasterkit in 143 mm
- 10109 line S plasterkit in 286 mm
- 10110 line S plasterkit in 572 mm

°turn

materials

weight

voltage

wattage

dimming

aluminium coated or anodised / PC

400gr / 0.88lb

48 Vdc

9,6 W

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*



*from Q3 2020

IP20

CE

RoHS

ErC

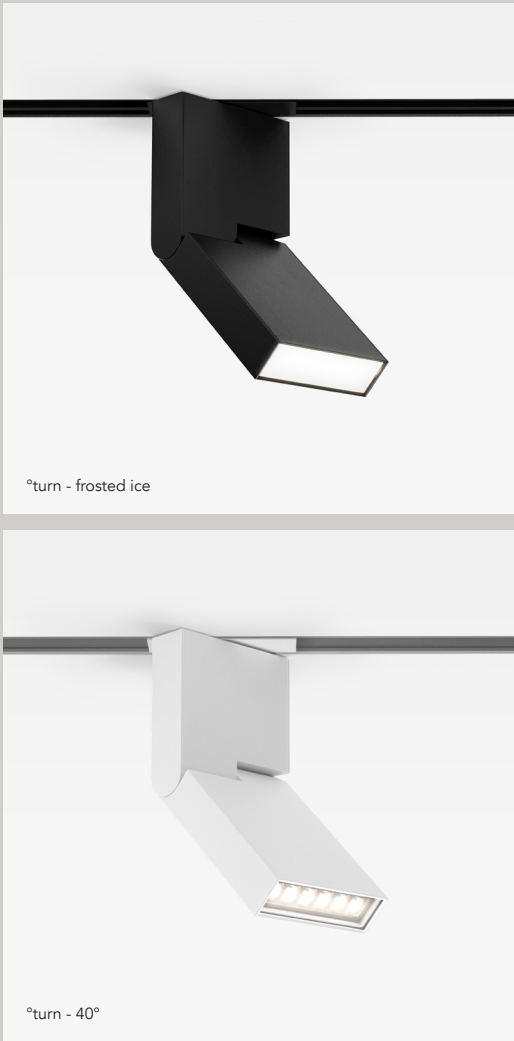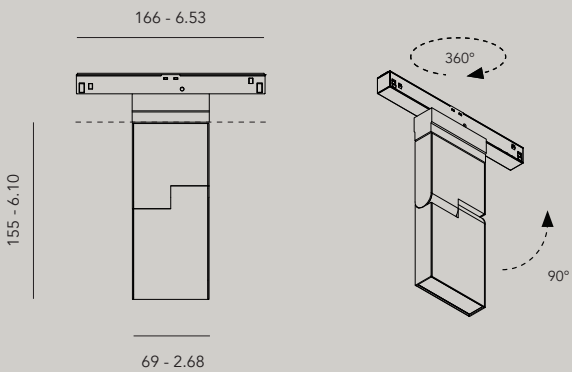

Order Code

10800.AA00.BBBB.CCC.DD turn

10803.AA00.BBBB.CCC.DD turn monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	
23	brass anodised	
25	bronze anodised	
26	dark bronze anodised	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
250	25°	790lm - 2820cd
400	40°	740lm - 1670cd
001	frosted ice	500lm - 220cd
002	microprism	490lm - 280cd
251	25° + frosted ice	640lm - 540cd
252	25° + microprism	590lm - 710cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories

10103 line S plasterkit turn

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°turn plus

materials

weight

voltage

wattage

ugr

dimming

aluminium coated or anodised / PC

465gr / 1.02lb

48 Vdc

13 W

louvre <19

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*



*from Q3 2020

IP20







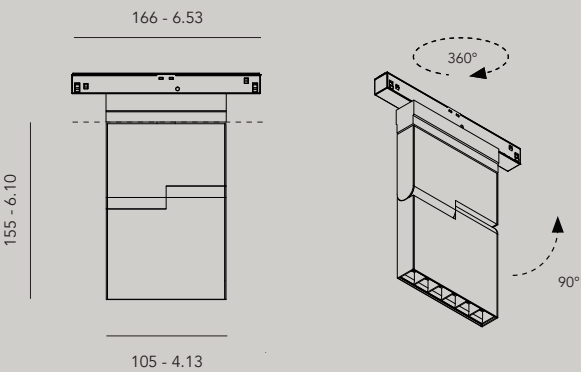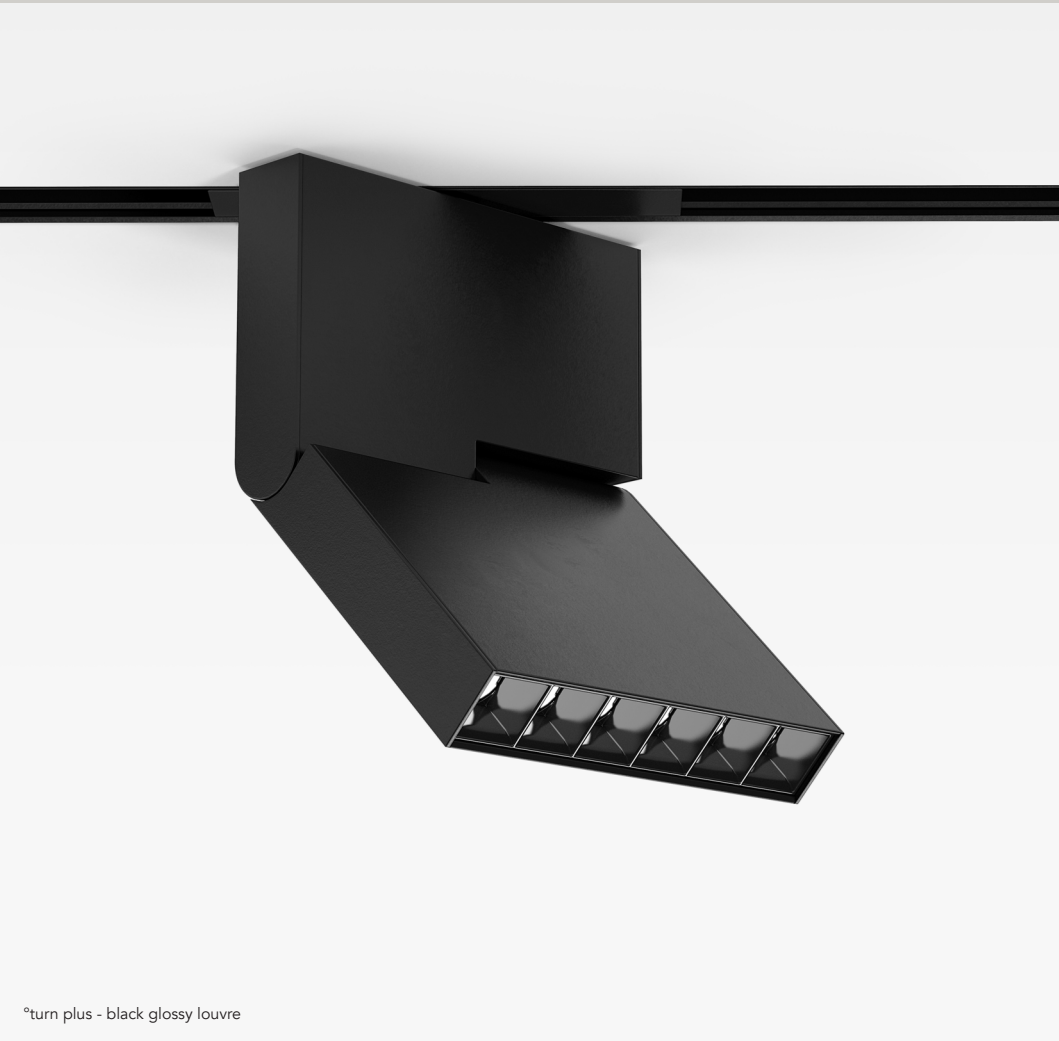

Order Code

10900.AA00.BBBB.CCC.DD turn plus

10903.AA00.BBBB.CCC.DD turn plus monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
001	frosted ice	630lm - 280cd
002	microprism	670lm - 410cd
251	25° + frosted ice	720lm - 620cd
252	25° + microprism	810lm - 1080cd
105	10° black glossy louvre	1195lm - 23250cd
255	25° black glossy louvre	880lm - 3330cd
355	35° black glossy louvre	870lm - 2500cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories

10104 line S plasterkit turn plus

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°u-disk

materials

weight

voltage

wattage

ugr

dimming

aluminium coated or anodised / PC

255gr / 0.56lb

48 Vdc

9,6 W

louvre <19

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020



IP20

CE

ENEC



°u-disk- black glossy louvre

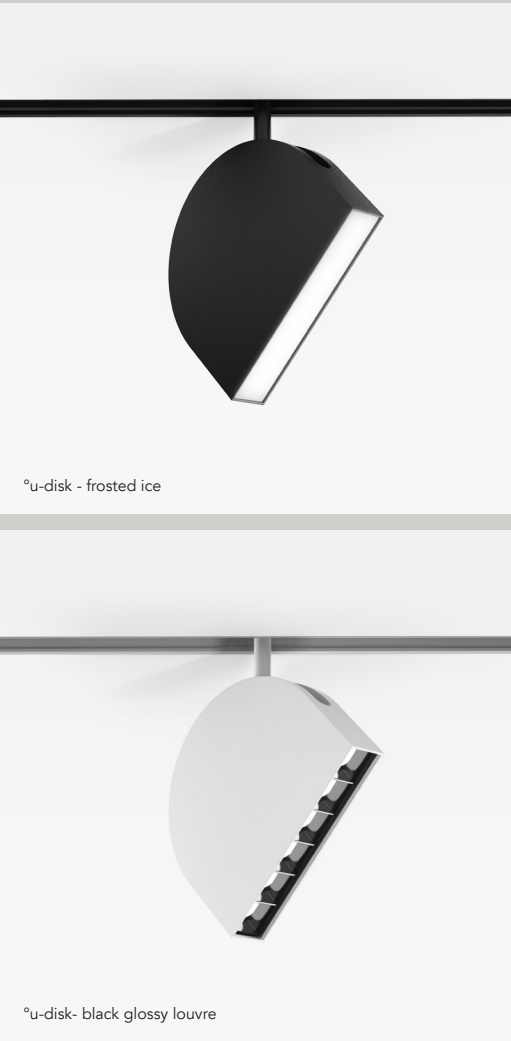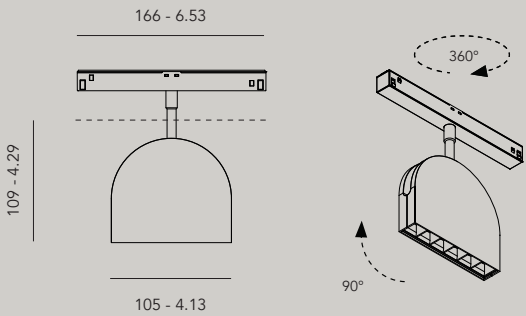

°u-disk - frosted ice

°u-disk- black glossy louvre

Order Code

11100.AA00.BBBB.CCC.DD u-disk

11103.AA00.BBBB.CCC.DD u-disk monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request

BBBB	Light	
9527	cri >95, 2700K	
9530	cri >95, 3000K	
9540	cri >95, 4000K - on request	

CCC	Optic	Output*
001	frosted ice	500lm - 220cd
002	microprism	550lm - 330cd
251	25° + frosted ice	550lm - 460cd
252	25° + microprism	580lm - 760cd
105	10° black glossy louvre	855lm - 18340cd
255	25° black glossy louvre	680lm - 2660cd
355	35° black glossy louvre	680lm - 2000cd

DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°o-disk

materials

weight

voltage

wattage

dimming

aluminium coated or anodised / PC

255gr / 0.56lb

48 Vdc

9,6 W

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*


*from Q3 2020

IP20







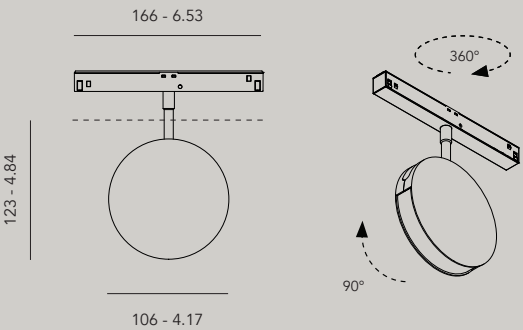

Order Code

11200.AA00.BBBB.CCC.DD °o-disk

11203.AA00.BBBB.CCC.DD °o-disk monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
001	frosted ice	255lm - 160cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories


10105 line S plasterkit o/u-disk

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.


°dot

materials aluminium coated or anodised / PC
weight 100gr / 0.22lb
voltage 48 Vdc
wattage 2,5 W
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
*from Q3 2020

IP20    ENEC

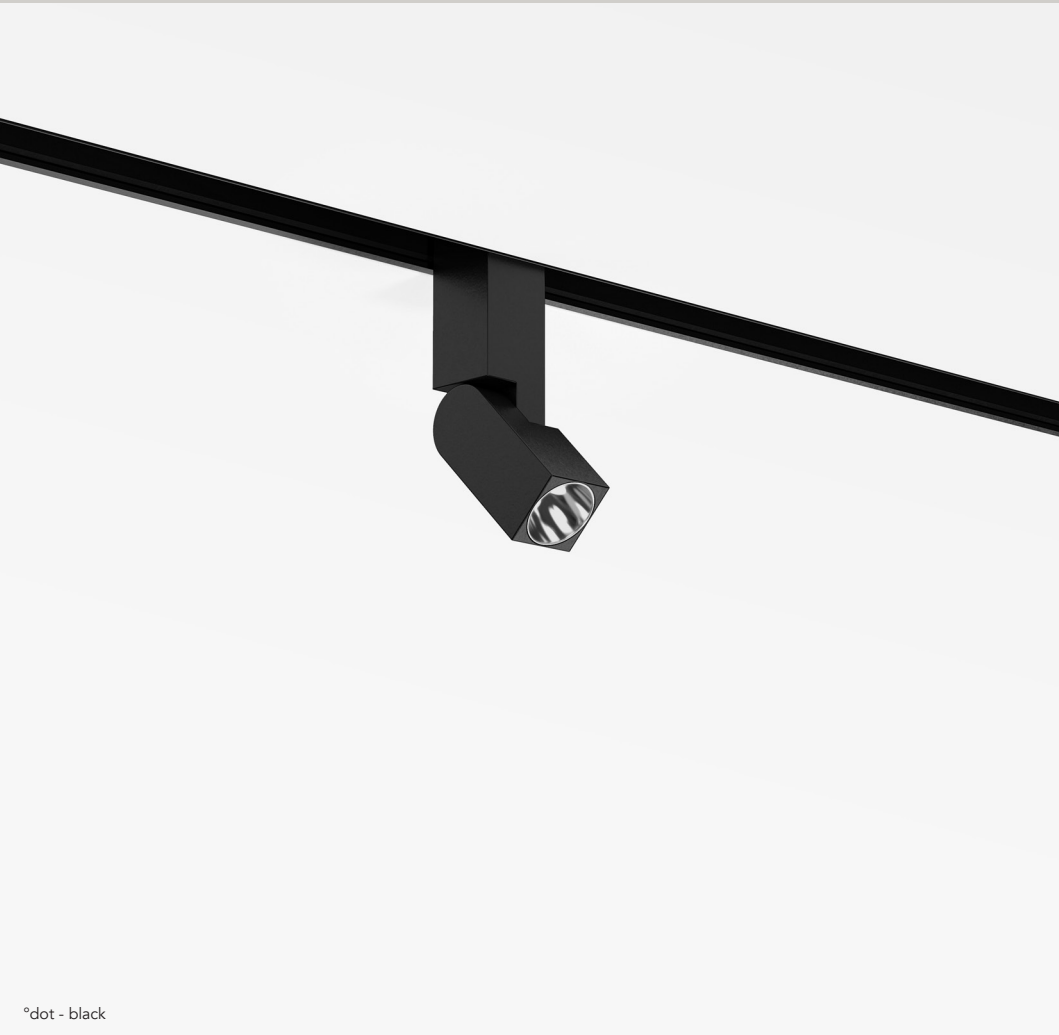

°dot - black

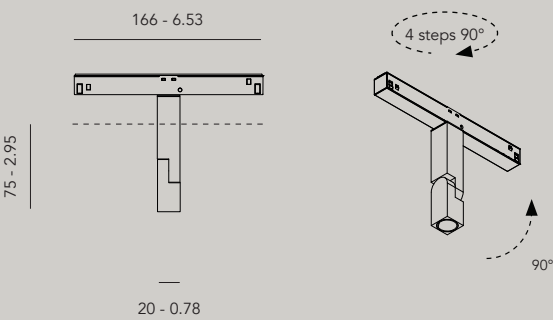

°dot - white

Order Code
11300.AA00.BBBB.CCC.DD dot
11303.AA00.BBBB.CCC.DD dot monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
100	10°	170lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories
10106 line S plasterkit dot

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°dot turn

materials

weight

voltage

wattage

dimming

aluminium coated or anodised / PC

186gr / 0.41lb

48 Vdc

2,5 W

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020

IP20



CE

RoHS

ErC



°dot turn - black

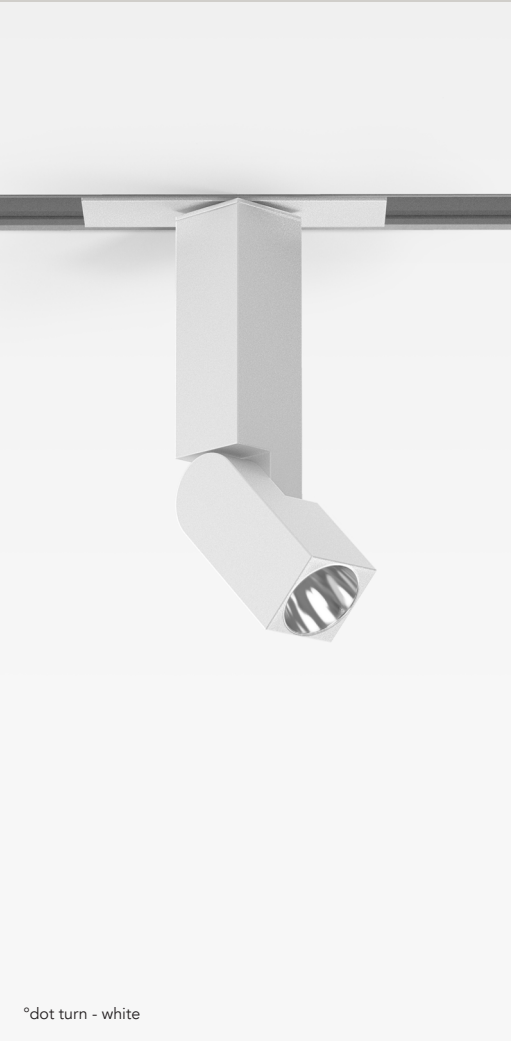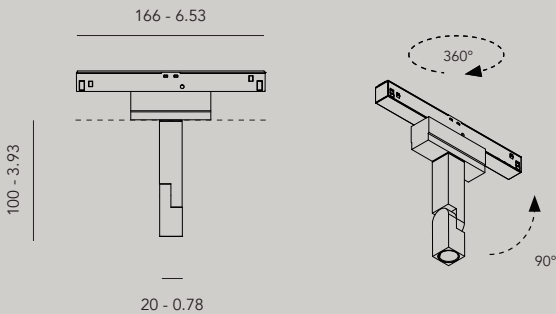

°dot turn - white

Order Code

11310.AA00.BBBB.CCC.DD dot turn

11313.AA00.BBBB.CCC.DD dot turn monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
9040	cri >90, 4000K - on request	
CCC	Optic	Output*
100	10°	170lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories



10107 line S plasterkit dot turn

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°out

materials	aluminium coated or anodised / PC
weight	510gr / 1.12lb
voltage	48 Vdc
wattage	19W
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
	*from Q3 2020

IP20    ENEC

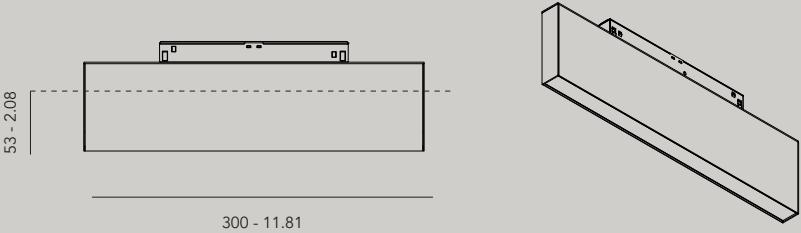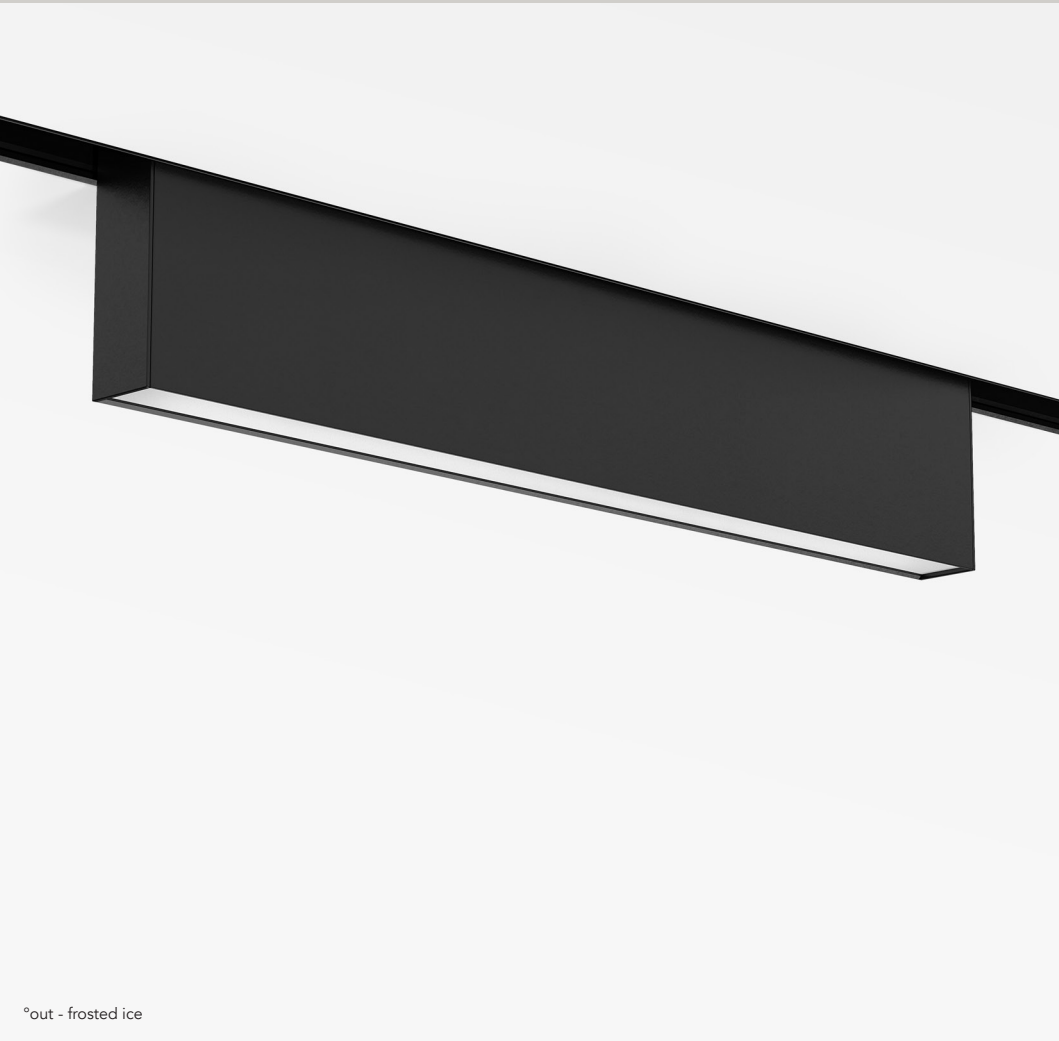

Order Code
11000.AA00.BBBB.CCC.DD out
11002.AA00.BBBB.CCC.DD out high output

AA	Finish
01	black
02	white
22	aluminum anodised
23	brass anodised
25	bronze anodised
26	dark bronze anodised

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	820lm - 300cd	1420lm - 560cd
002	microprism	770lm - 400cd	1400lm - 730cd
005	frosted ice SOLID	1160lm - 290cd	

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)





Accessories
10101 line S plasterkit knick/out

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°out medium

materials	aluminium coated or anodised / PC
weight	360 gr / 0.80 lb
voltage	48 Vdc
wattage	19W
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20    ENEC

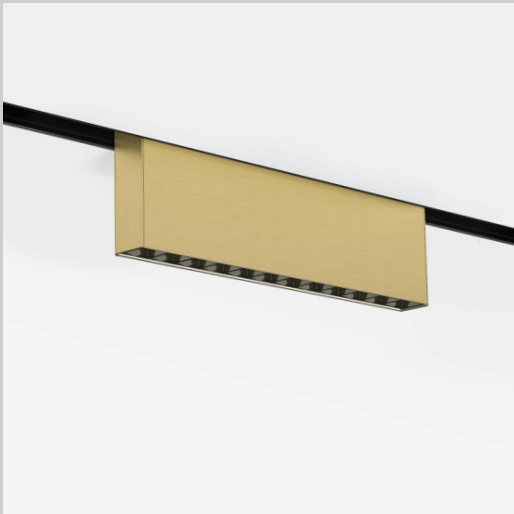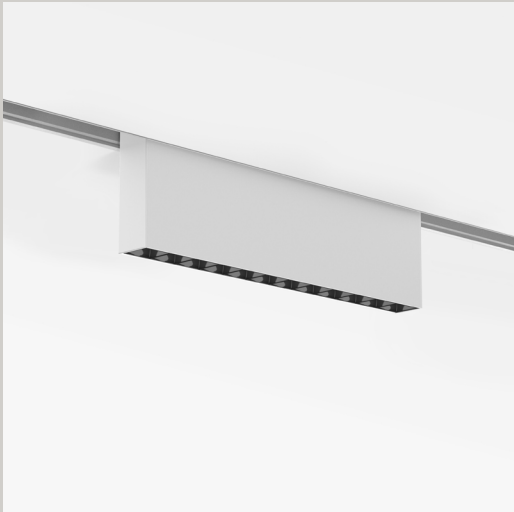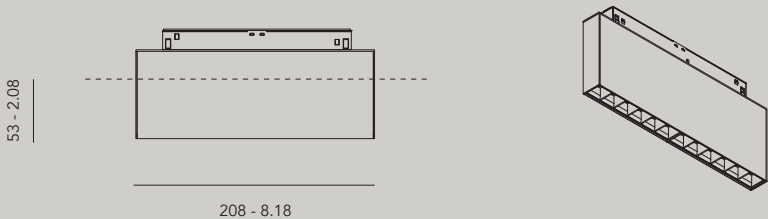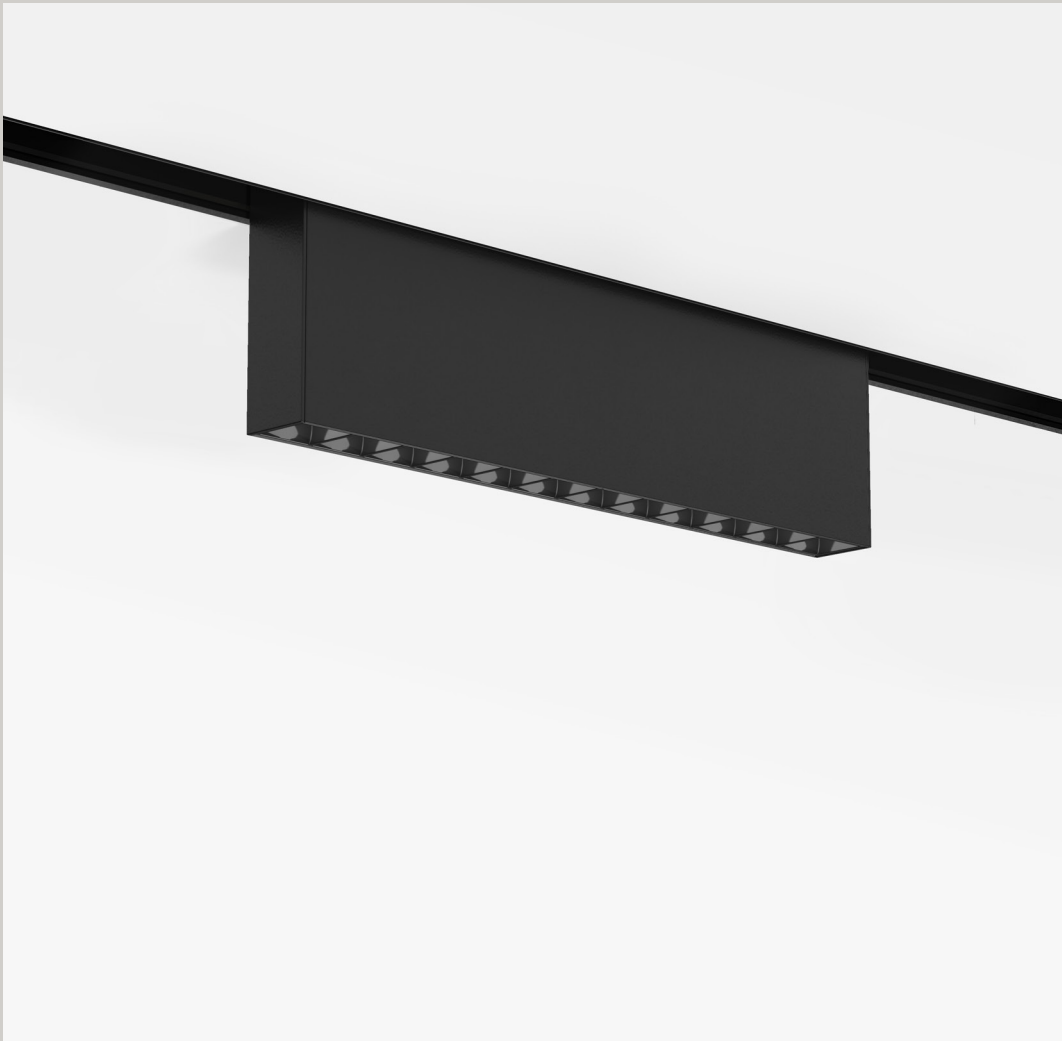

Order Code
11010.AA00.BBBB.CCC.DD out medium
11013.AA00.BBBB.CCC.DD out medium monopoint

AA	Finish
01	black
02	white
22	aluminum anodised
23	brass anodised
25	bronze anodised
26	dark bronze anodised

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output*
105	10° black glossy louvre	1800 lm
250	25° black glossy louvre	1800 lm
350	35° black glossy louvre	1800 lm

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories
10113 line S plasterkit knick m & out m


* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

°bevel^{new}

107

materials aluminium coated or anodised / PC
weight 600gr / 1.32lb
voltage 48 Vdc
wattage 8,2 W
ugr <19
dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
*from Q3 2020

IP20   

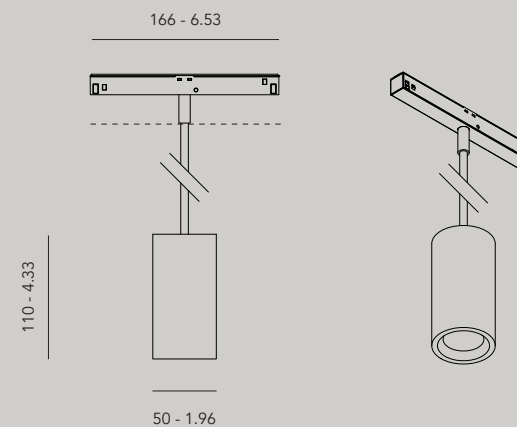

Order Code
20500.AA00.BBBB.CCC.DD bevel
20501.AA00.BBBB.CCC.DD bevel monopoint

AA	Finish
01	black
02	white
22	aluminum anodised brushed
23	brass anodised brushed
25	bronze anodised brushed
26	dark bronze anodised brushed

BBBB	Light
9527	cri 95, 2700K
9530	cri 95, 3000K

CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd

DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

Accessories
10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°tubu 40^{new}

materials

weight

voltage

wattage

ugr

dimming

aluminium coated / PC

200gr / 0.44lb

48 Vdc

6,7 W

<19


DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*

*from Q3 2020

IP20

CE

ENEC

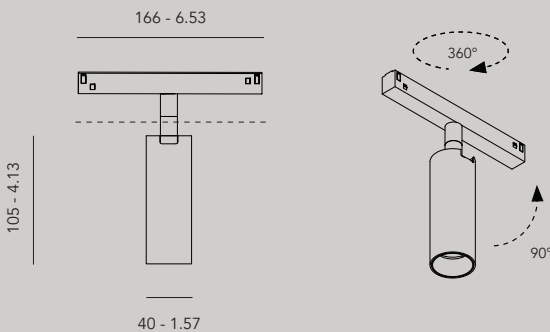

Order Code

11400.AA00.BBBB.CCC.DD tubu 40

11403.AA00.BBBB.CCC.DD tubu 40 monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request

BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	

CCC	Optic	Output*
250	25°	420lm - 1970cd

DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm

10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°tubu 60^{new}

materials

weight

voltage

wattage

ugr

dimming

aluminium coated / PC

330gr / 0.72lb

48 Vdc

15,4 W

<19

DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*


*from Q3 2020

IP20



CE

EN

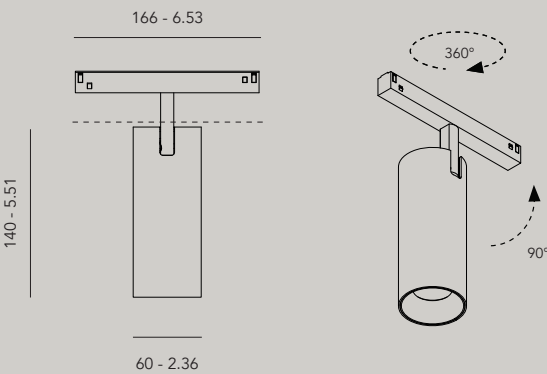

Order Code
11500.AA00.BBBB.CCC.DD tubu 60
11503.AA00.BBBB.CCC.DD tubu 60 monopoint

AA	Finish	
01	black	
02	white	
22	aluminum anodised	on request
23	brass anodised	on request
25	bronze anodised	on request
26	dark bronze anodised	on request

BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
9540	cri 95, 4000K - on request	
90TW	cri >90, tunable white - on request	

CCC	Optic	Output*
250	25°	1010lm - 2900cd
550	55°	1010lm - 1340cd

DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories
10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm



* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.



°tubu long^{new}

materials	aluminium coated or chrome / PC
weight	450gr / 0.99lb
voltage	48 Vdc
wattage	2,5 W
ugr	<19
dimming	DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
*from Q3 2020	

IP20   

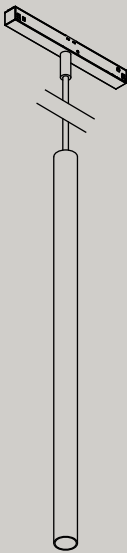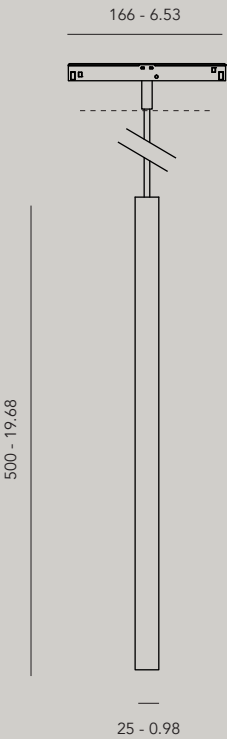

Order Code
11600.AA00.BBBB.CCC.DD tubu long
11603.AA00.BBBB.CCC.DD tubu long monopoint

AA	Finish	
01	black	
02	white	
04	chrome	
BBBB	Light	
9027	cri >90, 2700K	
9030	cri >90, 3000K	
CCC	Optic	Output*
100	10°	170lm - 2000cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories
10150.0100 recessed ceiling rose black, Ø50 mm
10150.0200 recessed ceiling rose white, Ø50 mm

* Values for 3000K. Color temperature influences the lumen output.
Download complete photometric data on our website.

