

°bloc line ^{new}

Bloc is now available as full length profile.
Choose your down and up lights.



Wall



300, 600 mm
or custom



°bloc

°bloc

85

The first linear lighting system available in a wide variety of high quality materials to offer a solution to your unique requirements.

Interchangeable °bloc units clip onto a surface mounted track.

Design by etre moderne



new

new





*bloc.spot, walnut & brass brushed & *bloc, walnut & white carrara
House, Belgium - architect Pascal François - photograph by Thomas De Bruyne (cafeine.be)





°bloc

91



°bloc.spot, bianco carrara & °bloc, oak with custom dye finish
Apartment, Belgium - Rubens-Frederix architecten



°bloc.spot (oak) & °bloc (carrara)




°bloc.spot, brushed brass & °bloc, carrara bianco / showroom Lumartes, NYC



°BLOC.STRIPE brass brushed & °BLOC walnut
House Aalst, Belgium - architect Pascal François - photograph by Jeroen Verrecht


set-up guide

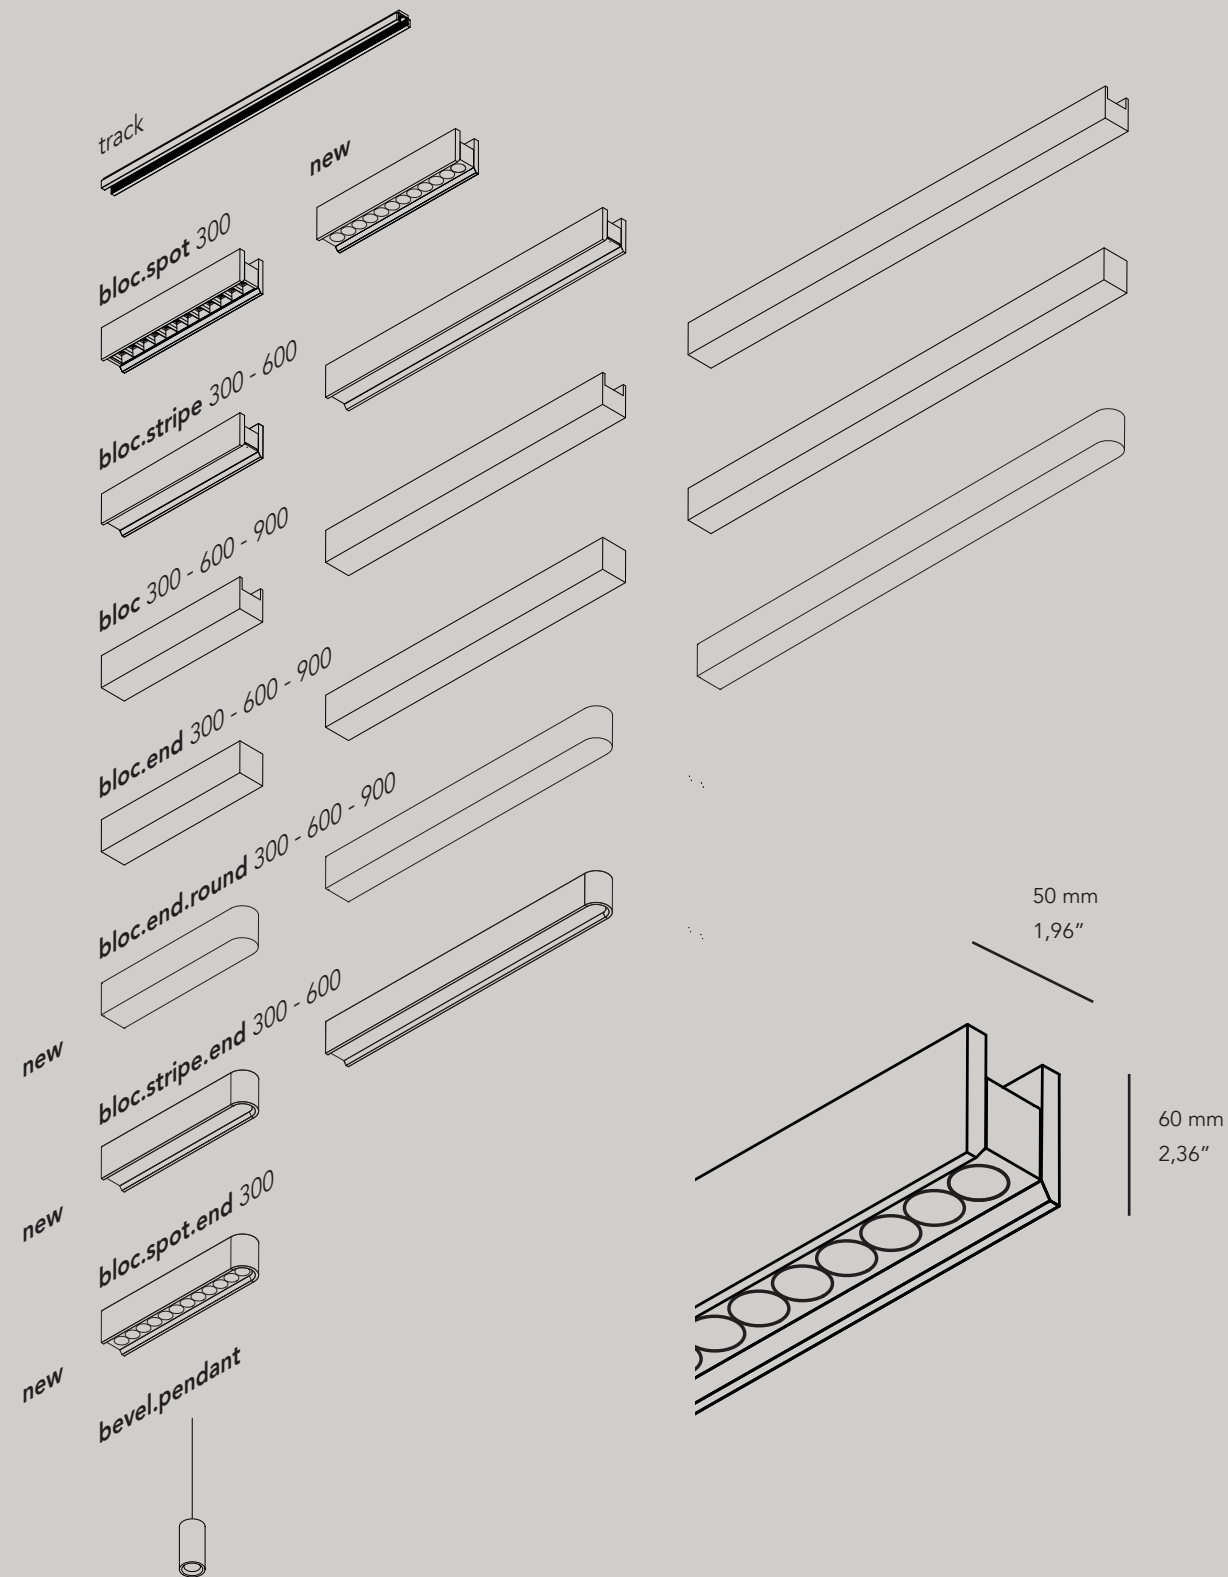

Order Code	BBBB	Length
20000.0100.BBBB bloc track black	0300	300 mm
	1000	1000 mm
	2000	2000 mm
	3000	3000 mm

Accessories


- 20252.0000 bloc track pendant 2 m steel cable suspension (incl. elec. cable)
- 20253.0000 bloc track pendant 2 m steel cable suspension
- 20254.0000 bloc track pendant 2 m bar suspension (incl. elec. cable)
- 20255.0000 bloc track pendant 2 m bar suspension

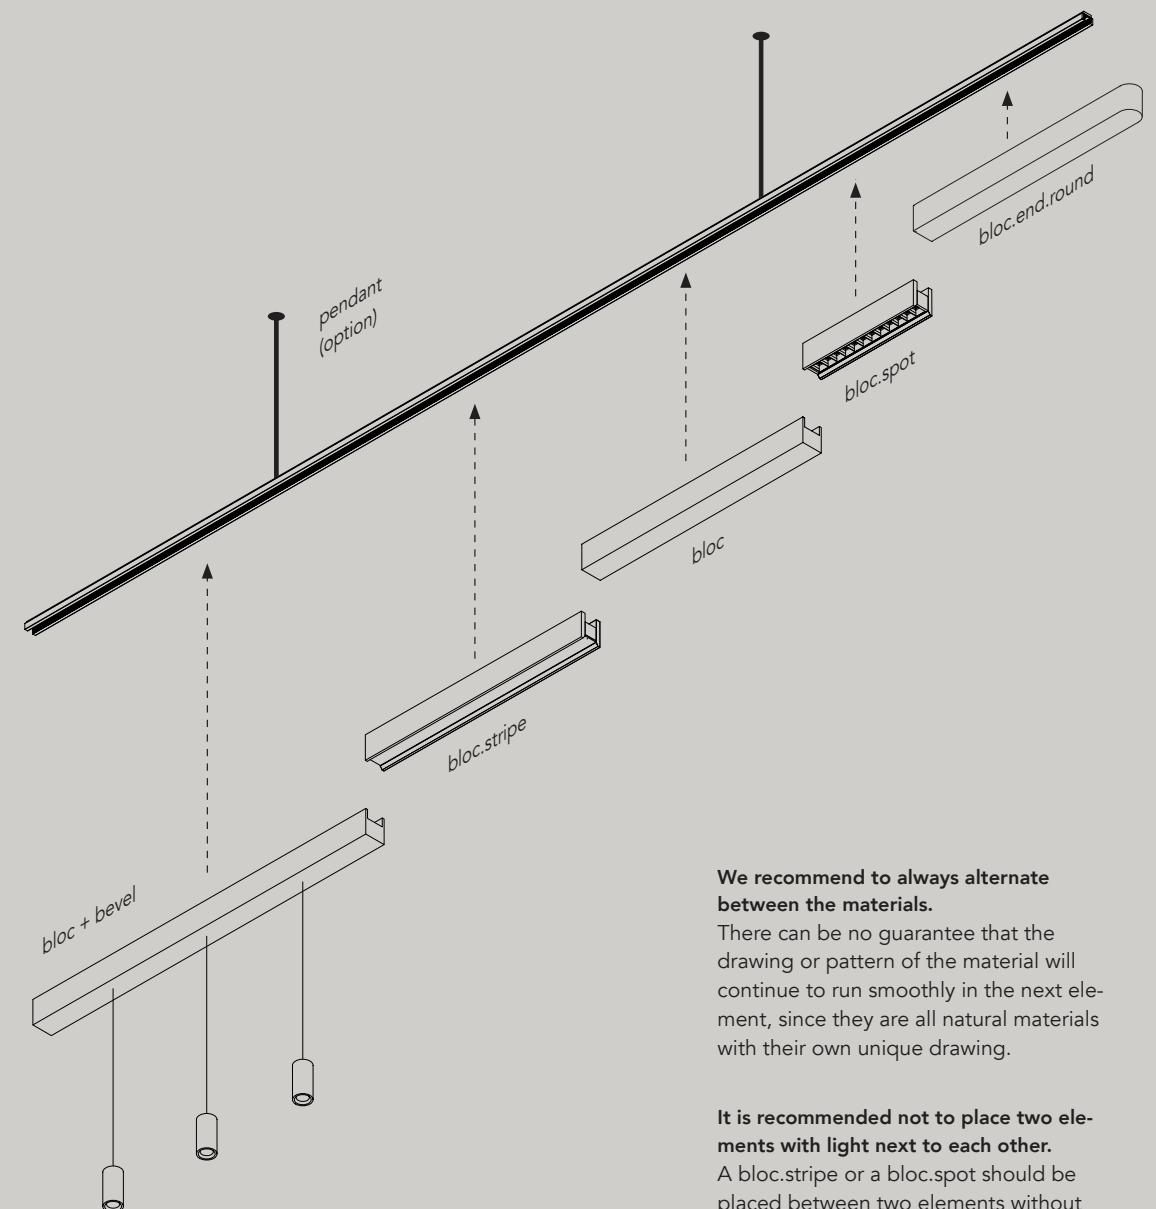

We recommend to always alternate between the materials.
There can be no guarantee that the drawing or pattern of the material will continue to run smoothly in the next element, since they are all natural materials with their own unique drawing.

It is recommended not to place two elements with light next to each other.
A bloc.stripe or a bloc.spot should be placed between two elements without light (full material).




Powersupply in bloc elements

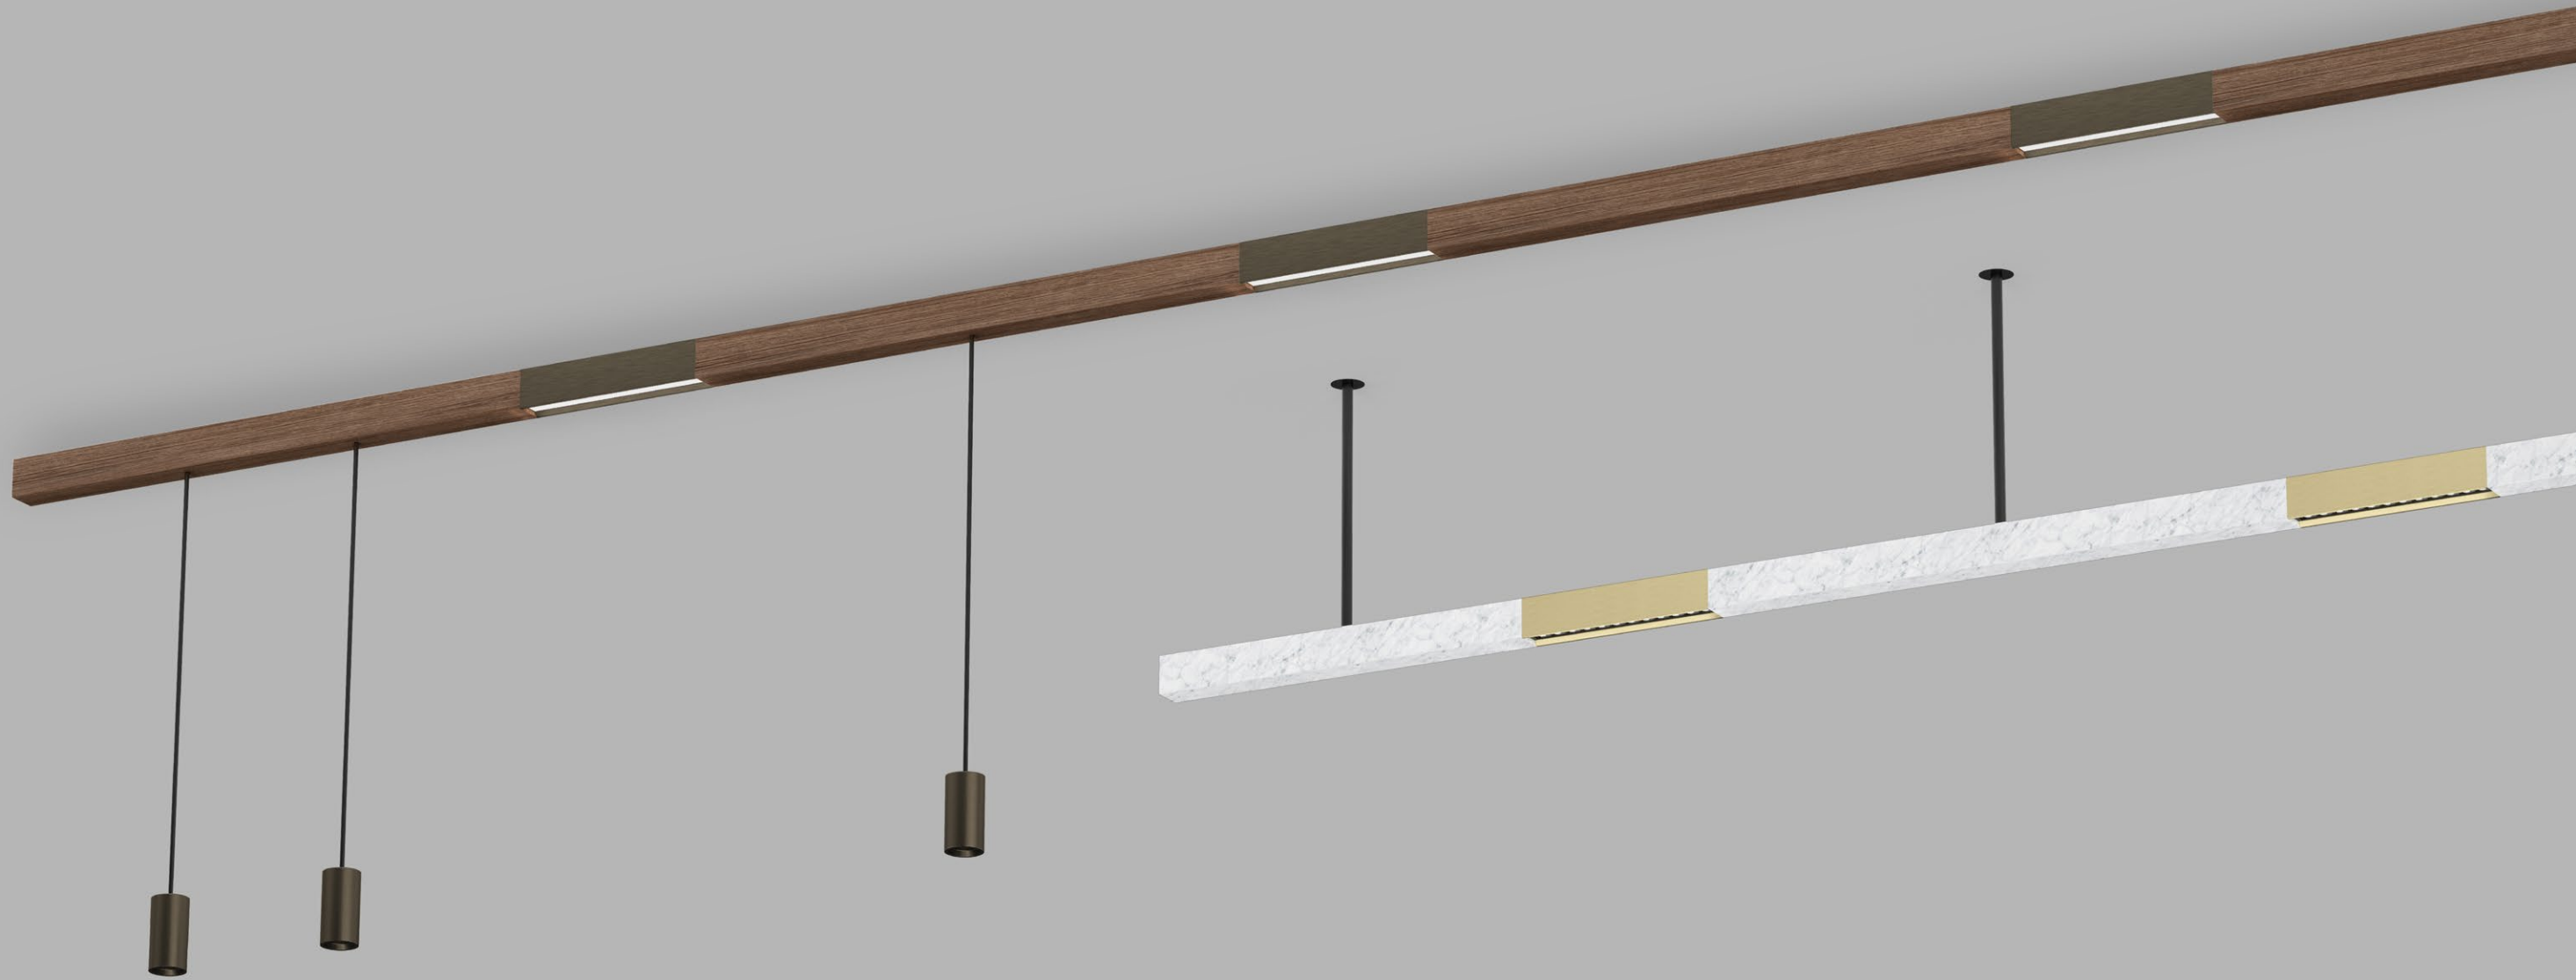

° bloc.spot

materials aluminium coated or anodised / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 ugr <10
 wattage 13W - 26W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20 CE ENEC




Order Code

20300.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector
20301.AA00.BBBB.CCC.DD
 bloc spot 300 - square reflector high output

20302.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector
20303.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector high output

20304.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector end
20305.AA00.BBBB.CCC.DD
 bloc spot 300 - round reflector end high output

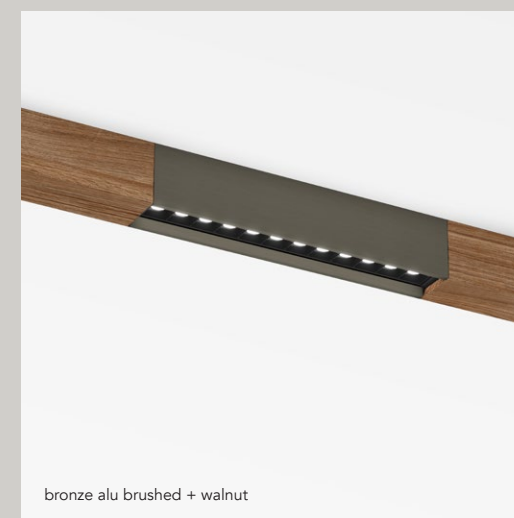

AA Finish

- 01 black coated
- 02 white coated
- 21 black alu brushed
- 22 natural alu brushed
- 23 brass alu brushed
- 25 bronze alu brushed
- 26 dark bronze alu brushed

On request (round end version & high output not possible)

- 40 walnut, natural waxed
- 41 oak natural, natural waxed
- 42 oak classic brown dye
- 43 oak intense black dye
- 61 carrara bianco extra, honed

BBBB Light

- 9527 cri >95, 2700K
- 9530 cri >95, 3000K
- 9540 cri >95, 4000K - on request

CCC	Optic	Output*	High output*
200	20 deg	1090lm - 5650cd	1870lm - 9770cd
300	30 deg	1055lm - 3310cd	1820lm - 5750cd
600	60 deg	1090lm - 1200cd	1870lm - 2060cd


DD Dimming

- ND no dimming
- DA dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc.stripe

materials aluminium coated or anodised / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 wattage 8,2W - 16,4W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

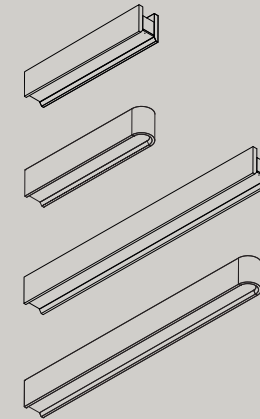

Order Code

- 20400.AA00.BBBB.CCC.DD bloc stripe 300
- 20401.AA00.BBBB.CCC.DD bloc stripe 300 high output
- 20402.AA00.BBBB.CCC.DD bloc stripe 300 end
- 20403.AA00.BBBB.CCC.DD bloc stripe 300 end high output
- 20410.AA00.BBBB.CCC.DD bloc stripe 600
- 20411.AA00.BBBB.CCC.DD bloc stripe 600 high output
- 20412.AA00.BBBB.CCC.DD bloc stripe 600 end
- 20413.AA00.BBBB.CCC.DD bloc stripe 600 end high output

*only available for alu anodised finish & black/white paint

IP20



*bloc stripe 300 - brass alu brushed + natural oak



*bloc stripe 600 - brass alu brushed + carrara bianco



brass alu brushed, round end + carrara bianco



bronze alu brushed + oak classic brown dye

AA	Finish
01	black coated
02	white coated
21	black alu brushed
22	natural alu brushed
23	brass alu brushed
25	bronze alu brushed
26	dark bronze alu brushed

On request (round end version & high output not possible)

40	walnut, natural waxed
41	oak natural, natural waxed
42	oak classic brown dye
43	oak intense black dye
61	carrara bianco extra, honed

BBBB	Light
9527	cri >95, 2700K
9530	cri >95, 3000K
9540	cri >95, 4000K - on request

CCC	Optic	Output	High output*
001	frosted ice	880lm - 310cd	1610lm - 560cd
002	microprism	780lm - 370cd	1430lm - 680cd


DD	Dimming
ND	no dimming
DA	dali (0/1-10V, switchDIM, Casambi through interface)

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc.mono

materials aluminium coated or anodised / PC
 weight from 0,5-5kg
 voltage 48 Vdc
 wattage 8,2W - 16,4W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa

IP20   

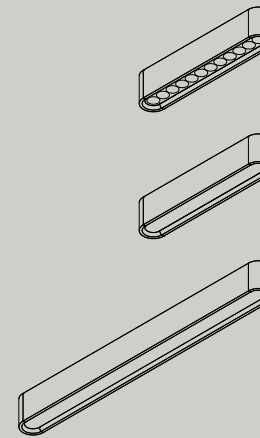

Order Code

- 20400.AA00.BBBB.CCC.DD bloc spot mono 300
- 20401.AA00.BBBB.CCC.DD bloc spot mono 300 high output
- 20402.AA00.BBBB.CCC.DD bloc mono stripe 300
- 20403.AA00.BBBB.CCC.DD bloc mono stripe 300 high output
- 20410.AA00.BBBB.CCC.DD bloc mono stripe 600
- 20411.AA00.BBBB.CCC.DD bloc mono stripe 600 high output



bronze brushed + round reflector - wall



natural alu anodised brushed + round reflector



bronze alu brushed + opal diffuser

AA	Finish		
01	black coated		
02	white coated		
21	black alu brushed		
22	natural alu brushed		
23	brass alu brushed		
25	bronze alu brushed		
26	dark bronze alu brushed		
BBBB	Light		
9527	cri >95, 2700K		
9530	cri >95, 3000K		
9540	cri >95, 4000K - on request		
CCC	Optic	Output	High output*
001	frosted ice diffuser	880lm - 310cd**	1610lm - 560cd**
002	microprism diffuser	780lm - 370cd**	1430lm - 680cd**
200	20 deg spots	1090lm - 5650cd	1870lm - 9770cd
300	30 deg spots	1055lm - 3310cd	1820lm - 5750cd
600	60 deg spots	1090lm - 1200cd	1870lm - 2060cd
DD	Dimming		
ND	no dimming		
DA	dali (0/1-10V, switchDIM, Casambi through interface)		

* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

** For stripe 300

°bloc


Order Code

- 20600.AA00 bloc 300
- 20610.AA00 bloc 600
- 20620.AA00 bloc 900
- 20601.AA00 bloc 300 end
- 20611.AA00 bloc 600 end
- 20621.AA00 bloc 900 end
- 20603.AA00 bloc 300 end round
- 20613.AA00 bloc 600 end round
- 20623.AA00 bloc 900 end round

bloc
300-600-900

bloc end
300-600-900

bloc end round
300-600-900

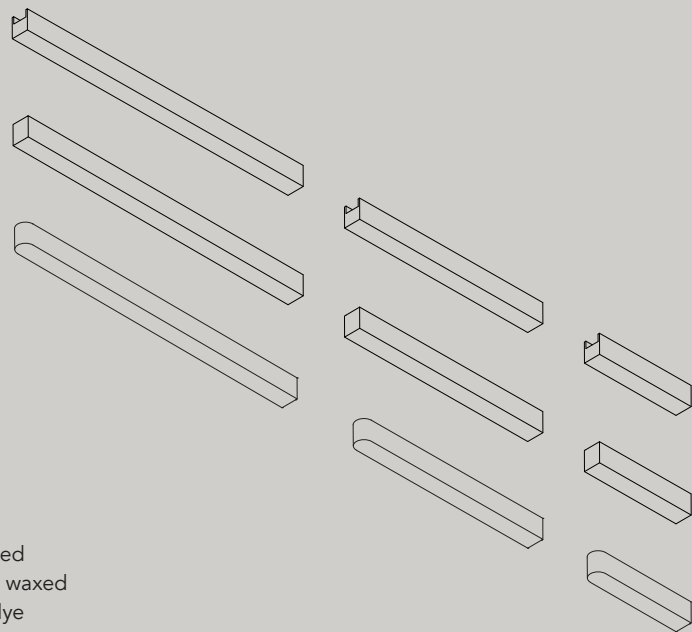

AA Finish


- 01 black
- 02 white
- 40 walnut, natural waxed
- 41 oak natural, natural waxed
- 42 oak classic brown dye
- 43 oak intense black dye
- 61 carrara bianco extra, honed

Custom material on request
Oak can be dyed in reference color

00 Driver

- 00 not included
- 01 power supply 100W included

°bloc colors

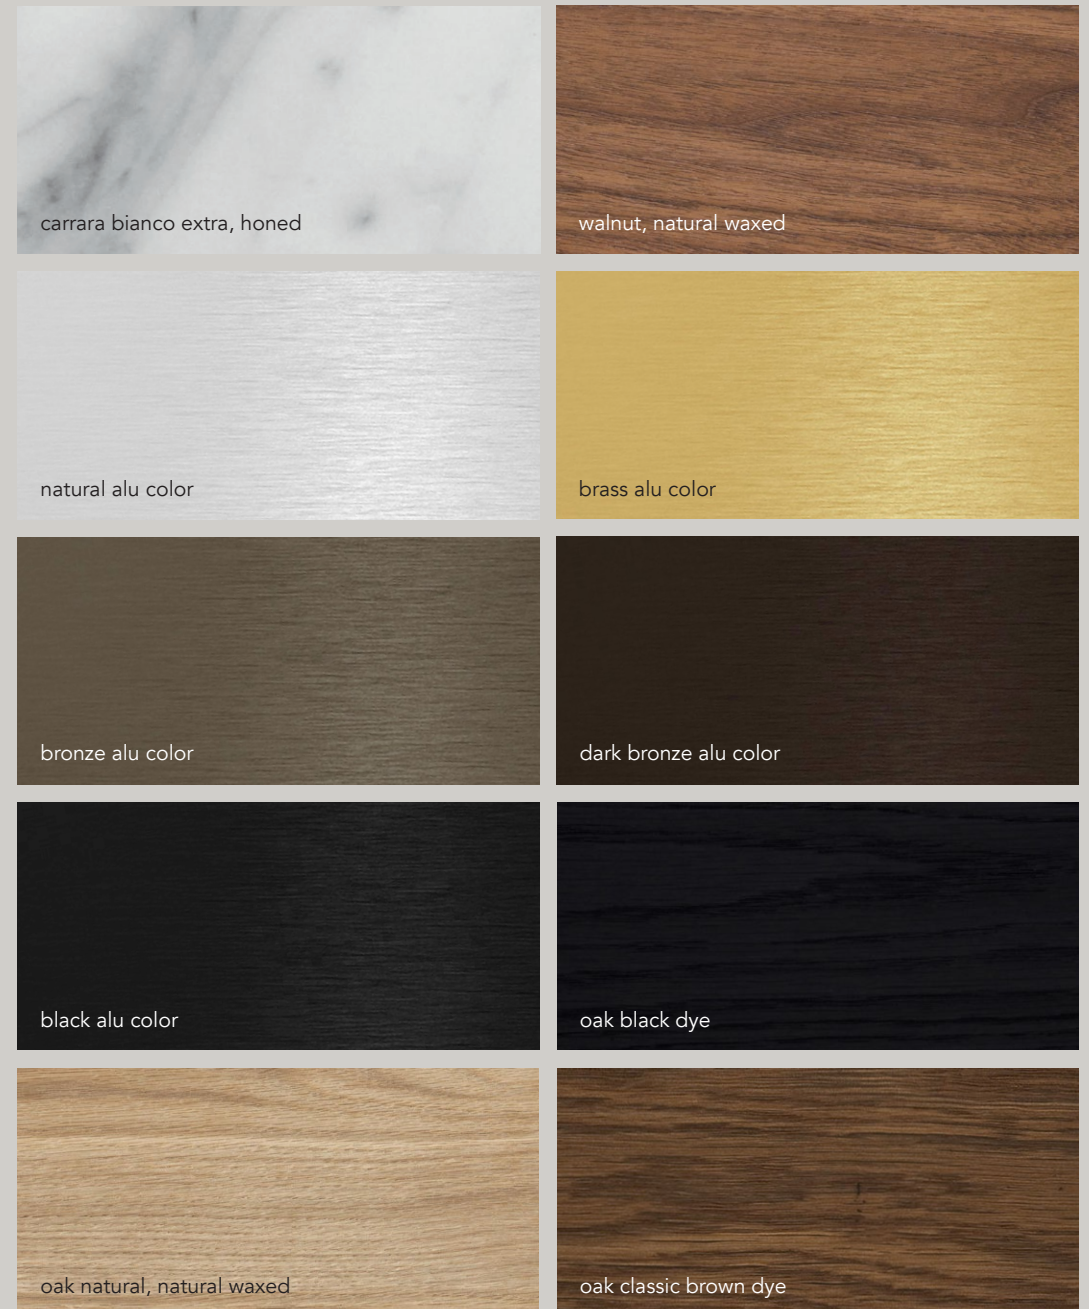


scale 1/1 - Differences in colors and patterns may occur since these are natural materials.

°bloc.bevel

materials aluminium coated or anodised / PC
 weight 600gr / 1.32lb
 voltage 48 Vdc
 wattage 8,2 W
 ugr <19
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google Home & Amazon Alexa*
 *from Q3 2020

IP20   

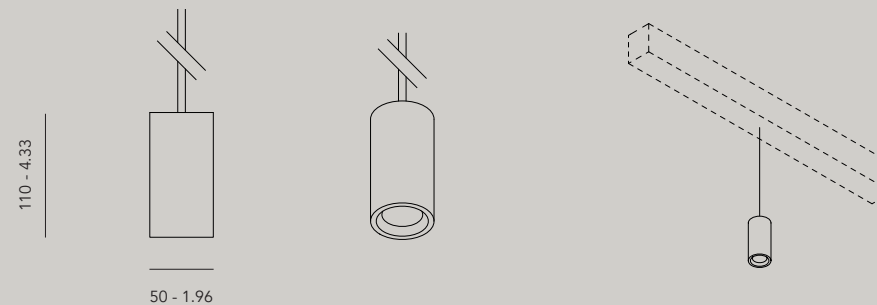

Natural
anodised
aluminum

Brass
anodised
aluminum

Bronze
anodised
aluminum

Dark Bronze
anodised
aluminum



Order Code

20500.AA00.BBBB.CCC.DD bevel
 20501.AA00.BBBB.CCC.DD bevel monopoint

°bevel must always be accompanied with a °bloc (see page 141)

max. 1 °bevel on bloc.300
 max. 2 °bevel on bloc.600
 max. 3 °bevel on bloc.900

AA	Finish	
01	black	
02	white	
22	aluminum anodised brushed	
23	brass anodised brushed	
25	bronze anodised brushed	
26	dark bronze anodised brushed	
BBBB	Light	
9527	cri 95, 2700K	
9530	cri 95, 3000K	
CCC	Optic	Output*
300	30°	670lm - 1550cd
450	45°	700lm - 1070cd
600	60°	690lm - 811cd
DD	Dimming	
ND	no dimming	
DA	dali (0/1-10V, switchDIM, Casambi through interface)	

Accessories

10150.0100 recessed ceiling rose black, Ø50 mm
 10150.0200 recessed ceiling rose white, Ø50 mm



* Values for 3000K. Color temperature influences the lumen output. Download complete photometric data on our website.

°bloc.line

materials aluminium coated or anodised / PC
 weight 3 kg/lm
 voltage 48 Vdc or Powersupply 110-240V
 wattage 8,2W - 16,4W (high output)
 dimming DALI, 0-10V, 1-10V, switchDIM, Casambi, Google home & amazon Alexa

IP20   



Order Code

21503.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, 3 spots
21500.AA00.BBBB.CCC.DD.EE bloc line 1550 mm, diffuser

22104.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, 4 spots
22100.AA00.BBBB.CCC.DD.EE bloc line 2150 mm, diffuser

22705.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, 5 spots
22700.AA00.BBBB.CCC.DD.EE bloc line 2650 mm, diffuser

Custom configuration on simple request

- AA Finish**
- 01 black
 - 02 white
 - 21 black alu brushed
 - 22 natural alu brushed
 - 23 brass alu brushed
 - 25 bronze alu brushed
 - 26 dark bronze alu brushed


- 00 Suspension**
- 00 surface
 - 01 pendant 2m
 - 02 pendant 6m

- BBBB Light**
- 9527 cri >95, 2700K
 - 9530 cri >95, 3000K
 - 9540 cri >95, 4000K - on request

- CCC Down Light**
- | | | |
|-----|----------------------|------------------------|
| 001 | frosted ice diffuser | measurement in process |
| 002 | microprism diffuser | measurement in process |
| 200 | 20 deg spots | 1090lm - 5650cd/spot |
| 300 | 30 deg spots | 1055lm - 3310cd/spot |
| 600 | 60 deg spots | 1090lm - 1200cd/spot |

- DD Dimming**
- ND no dimming
 - DA dali (0/1-10V, switchDIM, Casambi through interface)

- EE Up Light**
- 001 none
 - 002 upright (same color light as downlight)

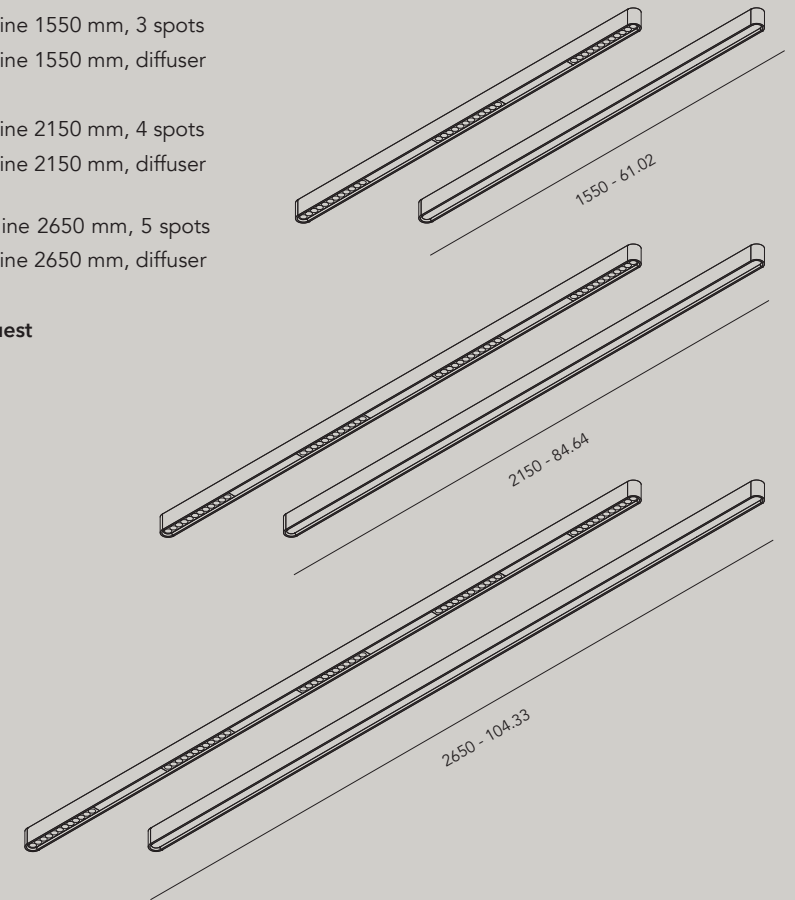

Values for 3000K. Color temperature influences the lumen output.
 Download complete photometric data on our website.