


## light + ventilation long

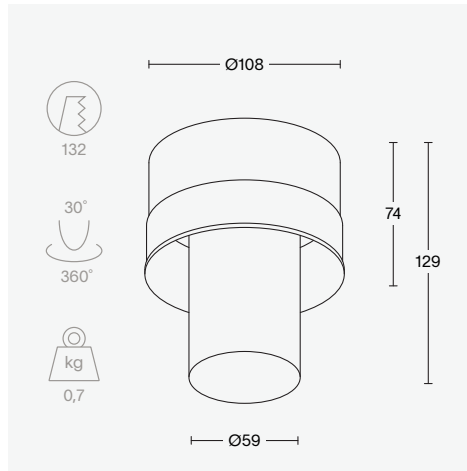

## light specs

<b>lamp</b>	LED
<b>optic</b>	glass lens
<b>driver</b>	excluded
<b>IP</b>	65
<b>CRI</b>	90+ / 97
<b>class</b>	III

## ventilation specs

<b>type</b>	air extraction
<b>air flow</b>	max. 50m <sup>3</sup> /h
<b>pressure</b>	7 - 75 Pa
<b>noise level</b>	< 25 dB(A)
<b>adjustment</b>	32 steps
<b>lock mechanism</b>	integrated

## luminaire output

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
<b>350mA (5.7W)</b>	290 lm	420 lm	585 lm	585 lm	325 lm	460 lm	645 lm	645 lm
<b>500mA (8.5W)</b>	450 lm	555 lm	730 lm	730 lm	495 lm	610 lm	805 lm	805 lm
<b>700mA (12.8W)</b>	505 lm	720 lm	955 lm	955 lm	560 lm	795 lm	1055 lm	1055 lm


## order number

	2700K				3000K			
	15°	25°	40°	60°	15°	25°	40°	60°
<b>black ano.</b>	8000-1001	8000-1002	8000-1003	8000-2752	8000-1004	8000-1005	8000-1006	8000-2754
<b>white struc.</b>	8000-1007	8000-1008	8000-1009	8000-2766	8000-1010	8000-1011	8000-1012	8000-2768


# light + ventilation long

## ventilation - capacity graphs

### air extraction

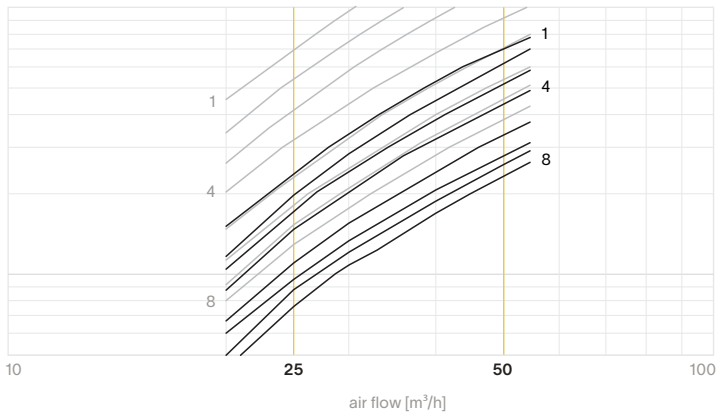

### air supply\*

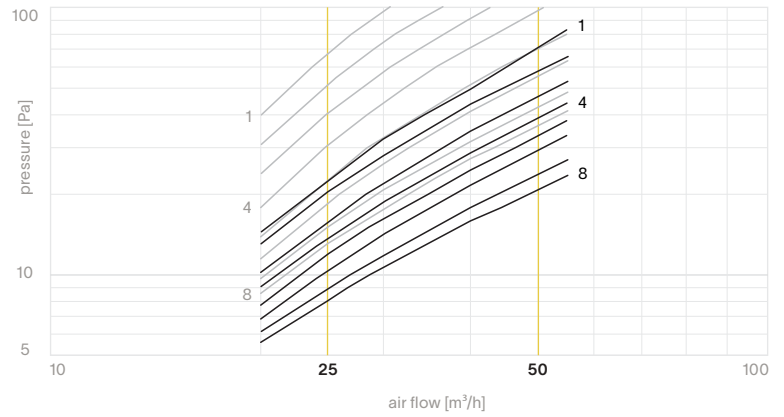

— with 25m³/h ring

— without 25m³/h ring

\*downward airflow not suited for installation in or above comfort zones

## accessoires

### installation

8000 - 0001	plaster ring Ø108
8000 - 0021	clt csc ring Ø108

### drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W