


prado

light only | short installation instruction

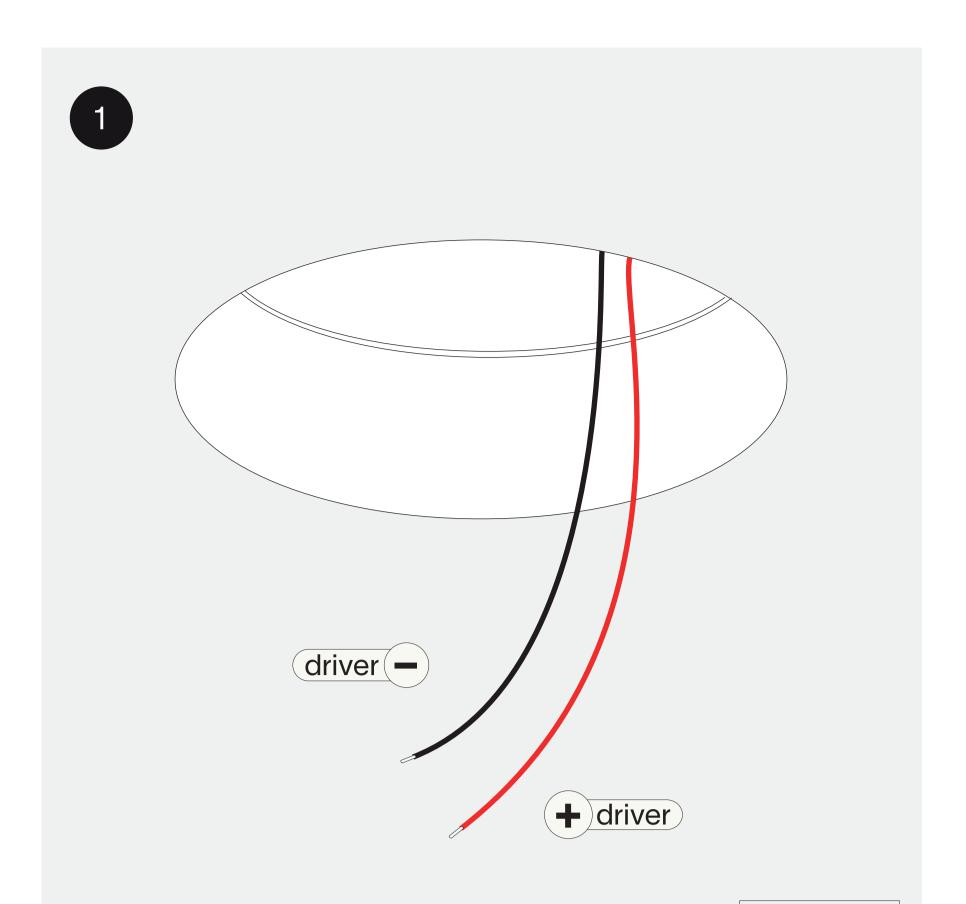




constant current (mA)	typical forward voltage (V)	typical power (W)
350	16,9	5,9
500	17,4	8,7

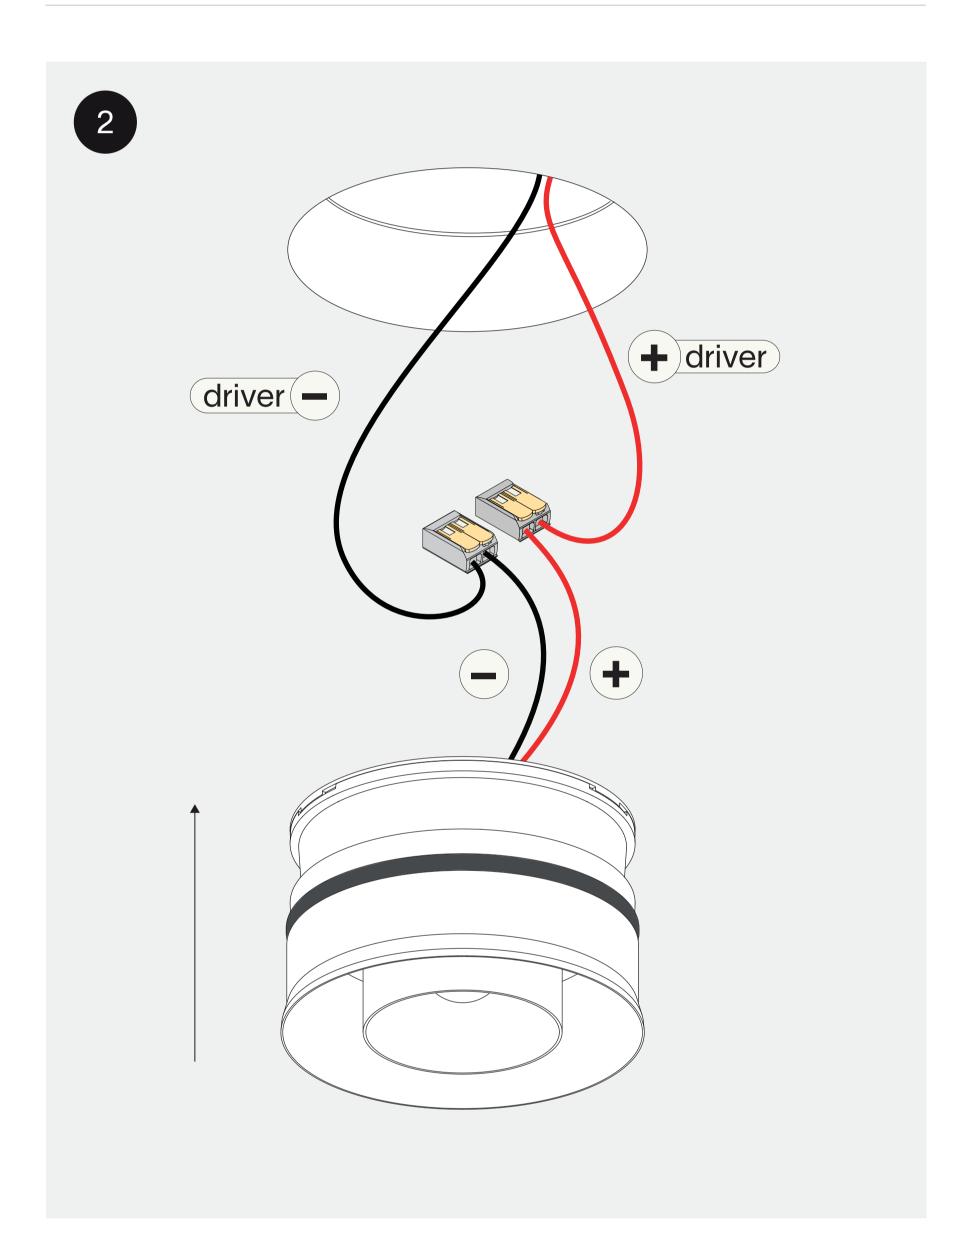

connect the wires with the included connectors for serial connection, respect polarity combine with a prado LED-driver

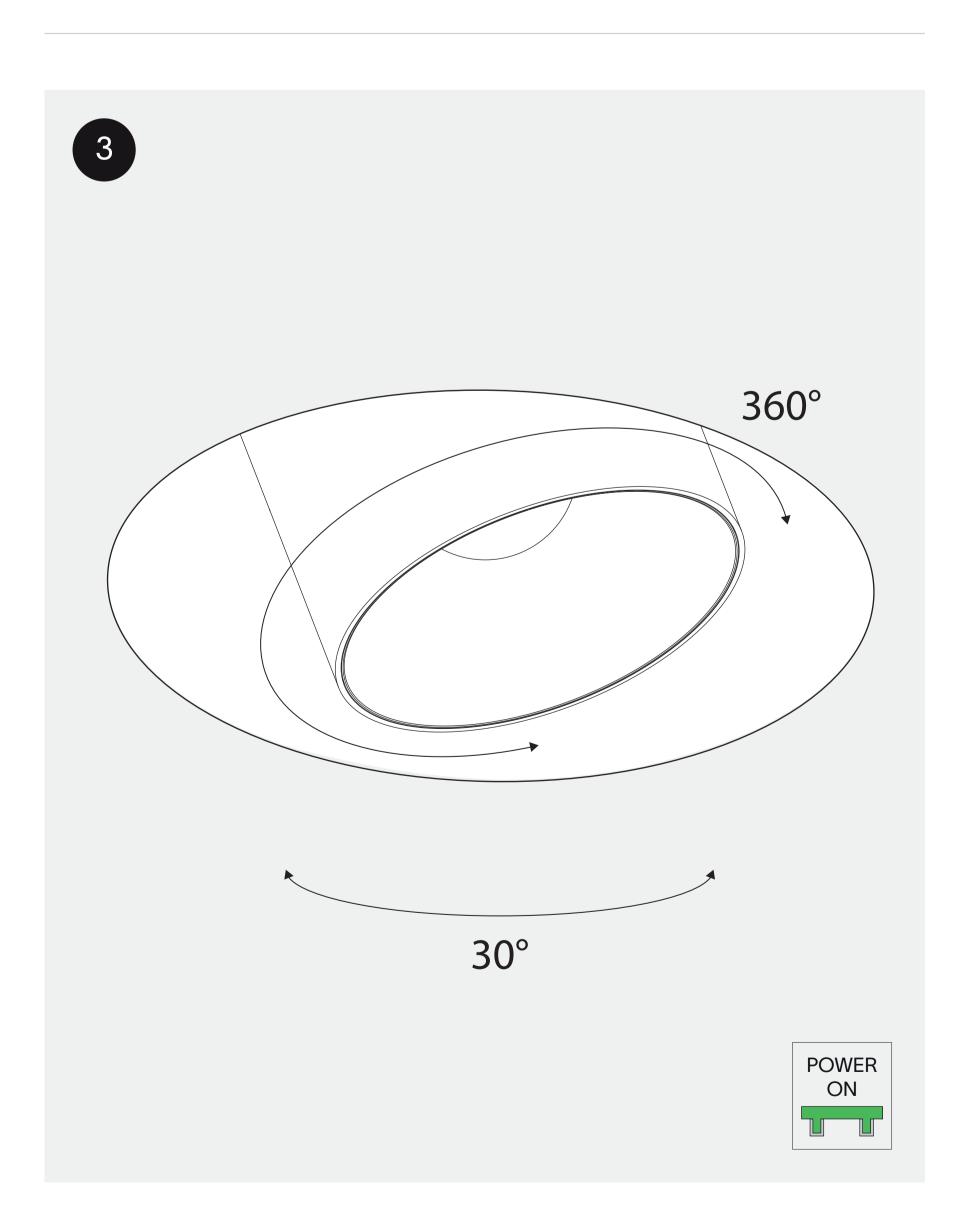

twist the luminaire as desired

thank you for choosing prado



Replace glass lens when broken. Luminaire shall only be used together with glass lens.

prado.eu

The light source in this luminaire shall only be replaced by the manufacturer or a similar qualified person. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair the product.