


## acrobat

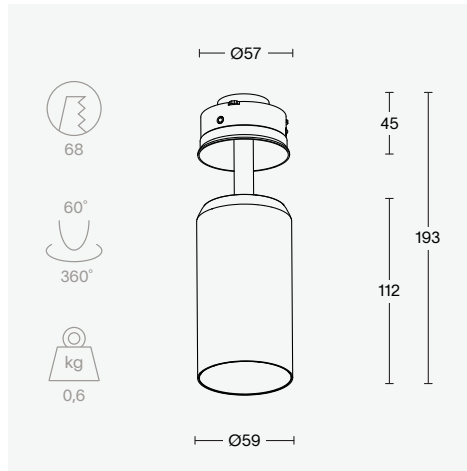

## light specs

<b>lamp</b>	LED
<b>reflector</b>	glass lens
<b>driver</b>	excluded
<b>IP</b>	44
<b>CRI</b>	90+
<b>class</b>	III

## luminaire output

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
<b>350mA (5.7W)</b>	290 lm	420 lm	585 lm	325 lm	460 lm	645 lm
<b>500mA (8.5W)</b>	450 lm	555 lm	730 lm	495 lm	610 lm	805 lm
<b>700mA (12.8W)</b>	505 lm	720 lm	955 lm	560 lm	795 lm	1055 lm
<b>850mA (16.8W)</b>	570 lm	815 lm	1075 lm	630 lm	900 lm	1180 lm

## order number

	2700K			3000K		
	15°	25°	40°	15°	25°	40°
<b>black ano.</b>	8000 - 1087	8000 - 1088	8000 - 1089	8000 - 1090	8000 - 1091	8000 - 1092
<b>white struc.</b>	8000 - 1093	8000 - 1094	8000 - 1095	8000 - 1096	8000 - 1097	8000 - 1098

# acrobat

## accessories

---

### installation

8000 - 0003	plaster ring Ø57
-------------	------------------

### drivers

---

8000 - 0021	DALI dimmable driver 38W
-------------	--------------------------

8000 - 0022	1-10V dimmable driver 36W
-------------	---------------------------

8000 - 0023	non-dimmable driver 42W
-------------	-------------------------

8000 - 0026	DALI dimmable driver 60W
-------------	--------------------------

8000 - 0027	DALI deep dim driver 20W
-------------	--------------------------