


## acrobat mini short

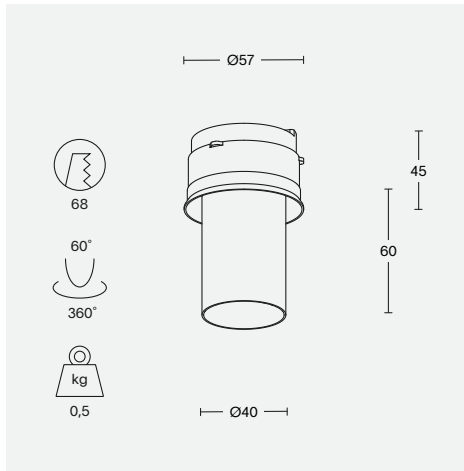

## light specs

lamp	LED
reflector	lens
driver	excluded
IP	20
CRI	90+ / 97
class	III

## accessories

## installation

8000 - 0003	plaster ring Ø57
8000 - 0013	clt csc ring Ø57

## drivers

8000 - 0021	DALI dimmable driver 38W
8000 - 0022	0-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

## luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425 lm	525 lm	525 lm	525 lm	450 lm	550 lm	550 lm	550 lm
500mA (8.5W)			710 lm				750 lm	

## order number

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
black ano.	8000-2402	8000-1868	8000-1707	8000-2576	8000-2403	8000-1869	8000-1708	8000-2577
white struc.	8000-2404	8000-1872	8000-1711	8000-2580	8000-2405	8000-1873	8000-1712	8000-2581