

ALPS TELE ADJUSTABLE PULL OUT RECESSED SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD/ALPSTELER62

DLD
ARCHITECTURAL





DETAILS

Tilt	0-90°
Rotation	355°
IP Rating	IP20
Class	I
Standards	CE / ROHS
Fire Rated	60+ minutes
Material	Aluminium
Fixation	Semi Recessed
Warranty	5 Years

KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Dim to dark with our range of fully tested drivers

DIMENSIONS (15W VERSION)

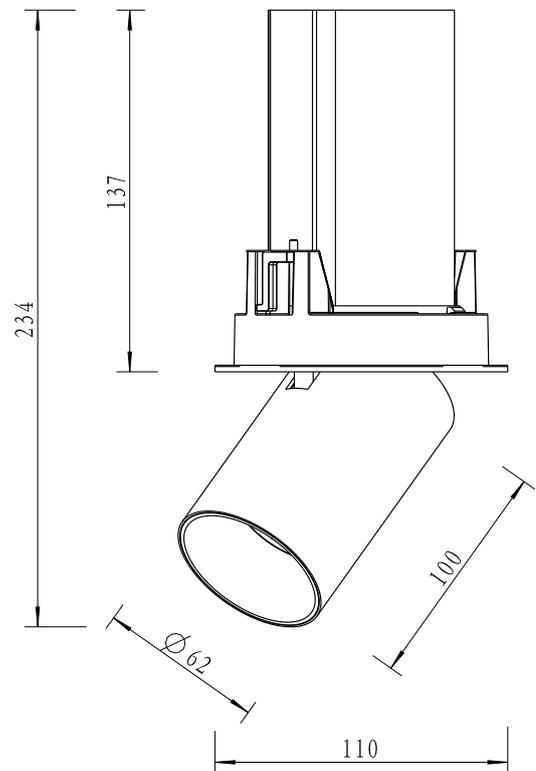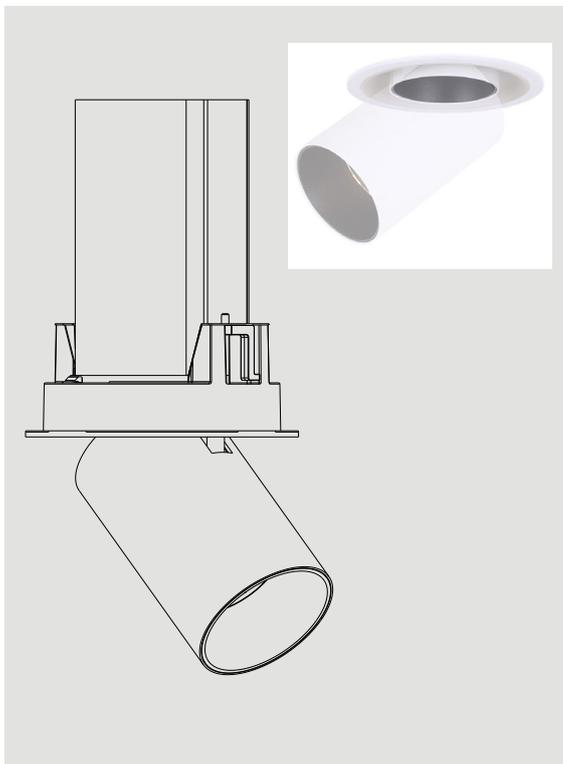

Light Engine:	Ø62mm, H.100mm
Aperture:	Ø62mm
Recessed Housing:	Ø110mm H.137mm
Total Height:	234mm
Cutout:	Ø100mm

TRUE COLOUR 98 CRI

ALPS TELE ADJUSTABLE PULL OUT RECESSED SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD/ALPSTELER62



PRODUCT CODE CONSTRUCTION

PRODUCT CODE PREFIX	FINISH	BEAM ANGLE	LIGHT TEMP. CCT	INTEGRATED DRIVER
DLD/ALPSTELER62	W	36D	27K	MD
<p><i>SIZE</i></p> <p>P Plaster-in 62 Ø62mm</p> <p>R Recessed 75 Ø75mm</p> <p>88 Ø88mm</p>	<p>W White</p> <p>B Black</p> <p>G Grey</p>	<p>15D 15°</p> <p>24D 24°</p> <p>36D 36°</p>	<p>27K 2700K</p> <p>30K 3000K</p> <p>40K 4000K</p>	<p>ND Non dim.</p> <p>MD Mains dim.</p> <p>010 0-10V dim.</p> <p>D DALI dim.</p>

SPECIFICATION (15W VERSION)

	2700K			3000K			4000K		
BEAM ANGLE	15°	24°	36°	15°	24°	36°	15°	24°	36°
System Lumen Output	1100 lm								
System Efficacy Lm/W	73 lm/W								
Binning SDCM	<3								
CRI	98								
R9	95								
TM30 Rf Rg	Rf 95 Rg 95								
UGR	11								
Cut-Off Angle	38°								
LED Type	Luminus Gen. 6 CXM-6 COB LED								
LED Lifetime (Ave.)	50,000 hrs								
POWER									
Wattage	15W								
Voltage	220-240V								
Current	350mA								
DRIVER									
Supported Protocols	Mains Dim / 0-10V / DALI								
Dim to Dark	0.1% Lux								
Distance from Luminaire	20m maximum								
Wiring	-								
Emergency	Emergency packs available								

01189 882294

sales@darklightdesign.com

darklightdesign.com

Darklight Design Ltd
 Unit 10 Brookside Business Centre
 Church Road | Swallowfield
 Reading | Berkshire
 RG7 1TH