

ALPS TELE ADJUSTABLE PULL OUT PLASTER IN SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD/ALPSTELEP62

DLD
ARCHITECTURAL




DETAILS

Tilt	0-90°
Rotation	355°
IP Rating	IP20
Class	I
Standards	CE / ROHS
Fire Rated	60+ minutes
Material	Aluminium
Fixation	Plaster-in recessed
Warranty	5 Years


KEY POINTS

- True Colour CRI 98, amazingly high level of colour rendering
- R9 95, reds are redder than ever
- Dim to dark with our range of fully tested drivers

DIMENSIONS

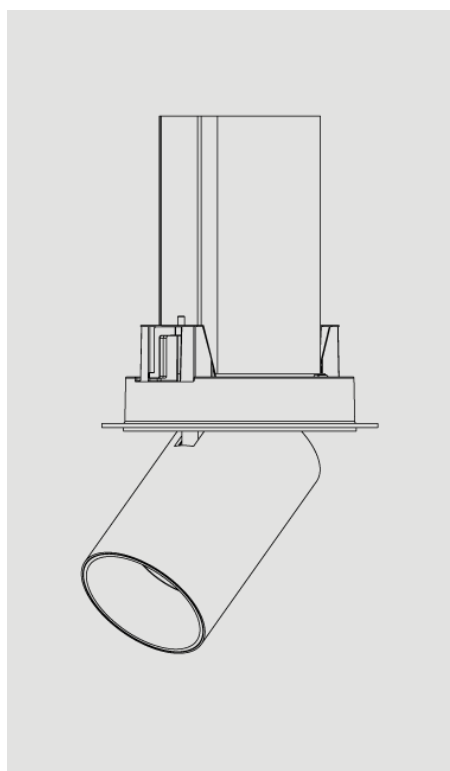

Light Engine: Ø62mm, H.100mm
Aperture: Ø62mm
Plaster Kit: Ø120mm H.137mm
Total Height: 234mm
Cutout: Ø100mm

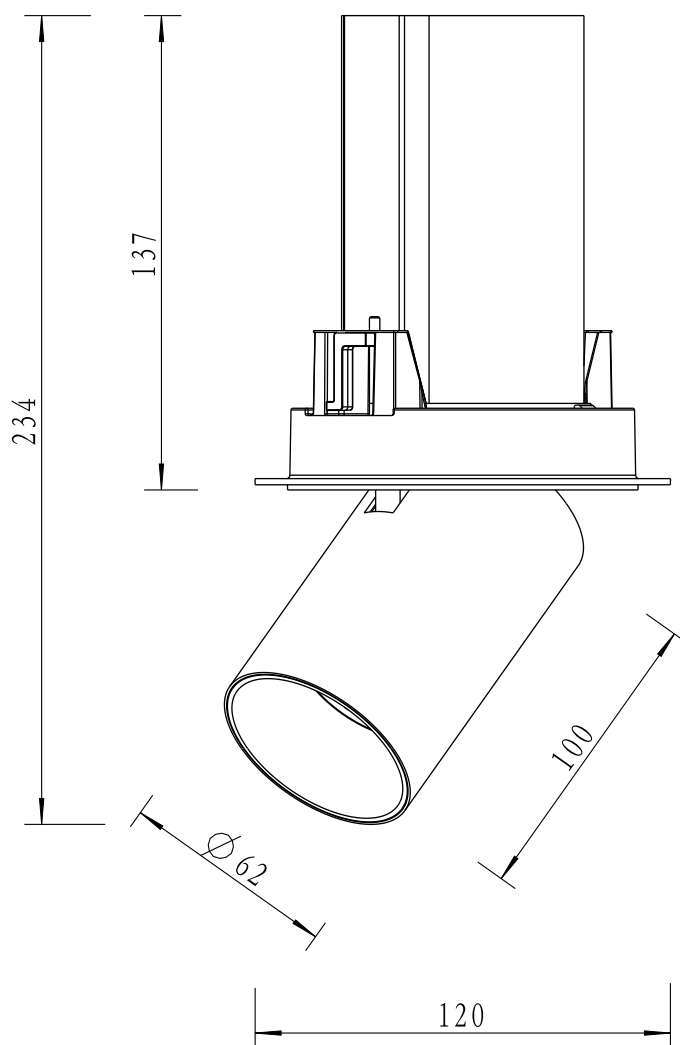

TRUE COLOUR 98 CRI

ALPS TELE ADJUSTABLE PULL OUT PLASTER IN SPOT LIGHT

TRUE COLOUR CRI 98 | REMOTE DRIVER

DLD/ALPSTELEP62

DLD
CONTRACT

PRODUCT CODE CONSTRUCTION

PRODUCT CODE PREFIX	FINISH	BEAM ANGLE	LIGHT TEMP. CCT	INTEGRATED DRIVER
DLD/ALPSTELEP62	W	36D	27K	TRI
SIZE P Plaster-in R Recessed	W White B Black G Grey	15D 15° 24D 24° 36D 36°	27K 2700K 30K 3000K 40K 4000K	ND Non dim. MD Mains dim. 010 0-10V dim. D DALI dim.
SIZE 62 Ø62mm 75 Ø75mm 88 Ø88mm				

SPECIFICATION

	2700K			3000K			4000K		
BEAM ANGLE	15°	24°	36°	15°	24°	36°	15°	24°	36°
System Lumen Output	1100 lm								
System Efficacy Lm/W	73 lm/W								
Binning SDCM	<3								
CRI	98								
R9	95								
TM30 Rf Rg	Rf 95 Rg 95								
UGR	11								
Cut-Off Angle	38°								
LED Type	Philips Lumileds COB LED								
LED Lifetime (Ave.)	50,000 hrs								
POWER									
Wattage	15W								
Voltage	220-240V								
Current	350mA								
DRIVER									
Supported Protocols	Mains Dim / 0-10V / DALI								
Dim to Dark	0.1% Lux								
Distance from Luminaire	20m maximum								
Wiring	-								
Emergency	Emergency packs available								



01189 889414



sales@darklightdesign.com



darklightdesign.com

Darklight Design
Unit 10 Brookside Business Centre
Church Road
Swallowfield
Reading
Berkshire
RG7 1TH