

## Pointer Surface ø52

14.3W, 2700K, CRI92, 22°, PHASE CUT, Black, 1153lm

### Technical features

Luminaire total power: 14.3W

Real lumens: 1153

Real lm/W: 81

Correlated Colour Temperature (CCT): 2700K

Lens / reflector angle: MEDIUM 22°

UGR: <=16

Structure material: Aluminium

Structure finish: Black

Diffuser material: Polycarbonate

Diffuser finish: Transparent


Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: PHASE CUT

Power Factor: NULL

Useful life: 50,000h L80B20

Warranty: 5 years



### Luminotechnic features

CRI: 92


MacAdam steps: 2

Photobiological risk:RG1

UGR crosswise: 12.4

UGR lengthwise: 12.4

| Lampholder | Quantity | Light source power (W) | Correlated Colour Temperature (CCT) |
|------------|----------|------------------------|-------------------------------------|
| LED        | 1        | 11.8W                  | 2700K                               |

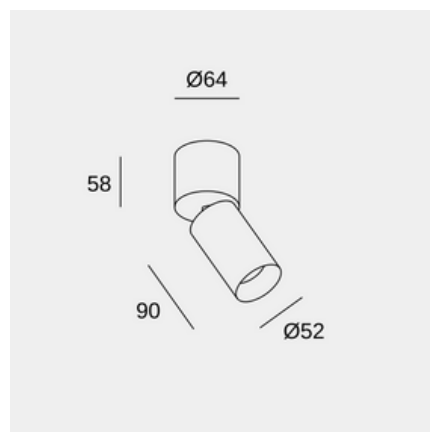

## Pointer Surface ø52

14.3W, 2700K, CRI92, 22°, PHASE CUT, Black, 1153lm

### Logistics



x 1

Net weight (kg): 0.42

Packaged weight (kg): 0.52

Packaging: 100mm x 105mm  
x 260mm