

Pointer Surface ø52

14.3W, 2700K, CRI92, 22°, PHASE CUT, Satin nickel, 1153lm

Technical features

Luminaire total power: 14.3W

Real lumens: 1153

Real lm/W: 81

Correlated Colour Temperature (CCT): 2700K

Lens / reflector angle: MEDIUM 22°

UGR: <=16

Structure material: Aluminium

Structure finish: Satin nickel

Diffuser material: Polycarbonate

Diffuser finish: Transparent


Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: PHASE CUT

Power Factor: NULL

Useful life: 50,000h L80B20

Warranty: 5 years



Luminotechnic features

CRI: 92


MacAdam steps: 2

Photobiological risk:RG1

UGR crosswise: 12.4

UGR lengthwise: 12.4

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	11.8W	2700K

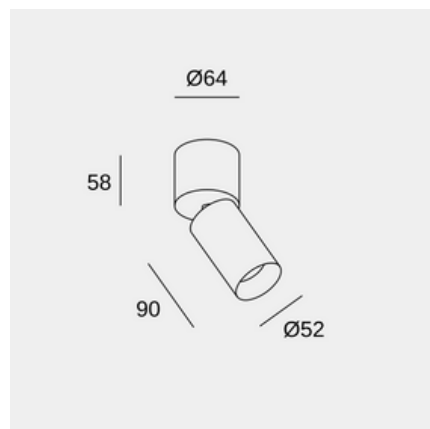

Pointer Surface ø52

14.3W, 2700K, CRI92, 22°, PHASE CUT, Satin nickel, 1153lm

Logistics



Net weight (kg): 0.42

Packaged weight (kg): 0.52

Packaging: 100mm x 105mm
x 260mm