

Dawn

Recessed wall lighting, LED 2.2W, 3000K, IP66, 77lm

Technical features

- Luminaire total power: 2.2W
- Real lumens: 77
- Real lm/W: 35
- Correlated Colour Temperature (CCT): LED warm-white 3000K
- Lens / reflector angle: FLOOD 60°
- Structure material: Aluminium
- Structure finish: White
- Diffuser material: Glass
- Diffuser finish: Transparent
- Equipment necessary but not included
- Voltage / frequency: 3V/max.700mA
- Useful life: 50,000h L80B20
- Warranty: 5 years
- Resistant to marine environments: Yes
- Easily recyclable luminaire

IP66 IK10












Luminotechnic features

- CRI: 90
- MacAdam steps: 3
- Photobiological risk: RG1
- UGR crosswise: 21.2
- UGR lengthwise: 13.7


Lampholder	Quantity	Light source power (W)
LED	1	2.2W

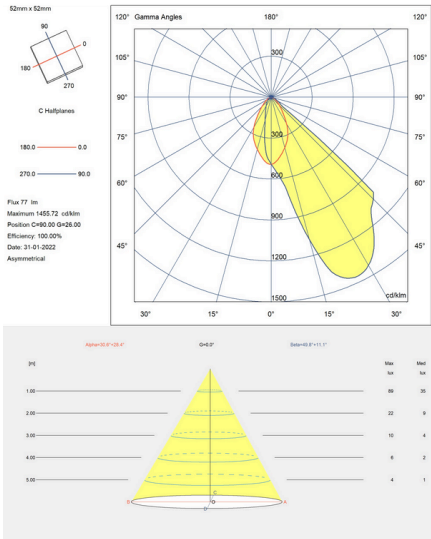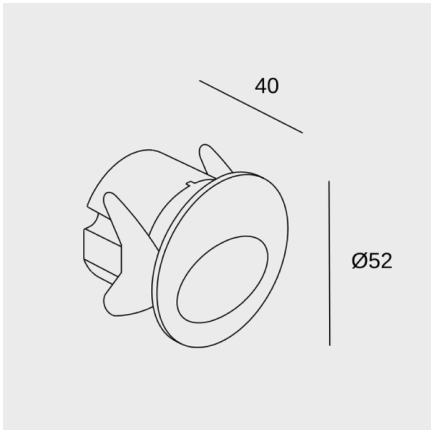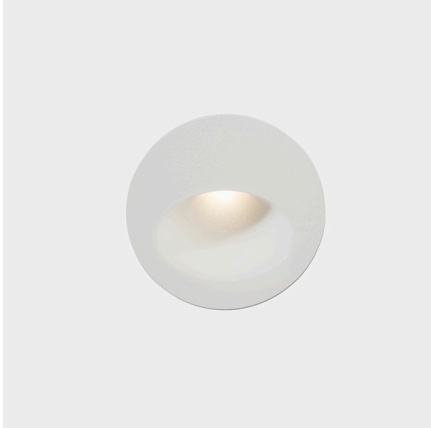

Dawn

Recessed wall lighting, LED 2.2W, 3000K, IP66, 77lm

Logistics



Net weight (kg): 0.1

Packaged weight (kg): 0.17

Packaging: 116mm x 80mm x 78mm