



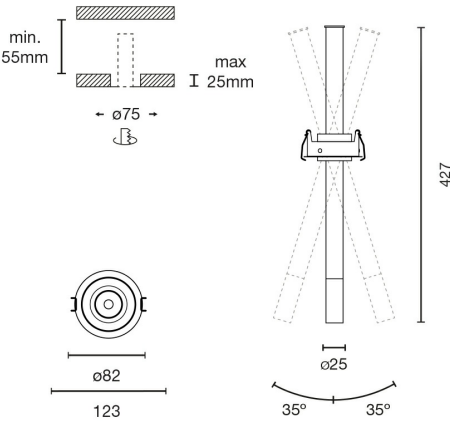

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | No                    |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | On/off                |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

↓ Installation instructions


↓ Photometric

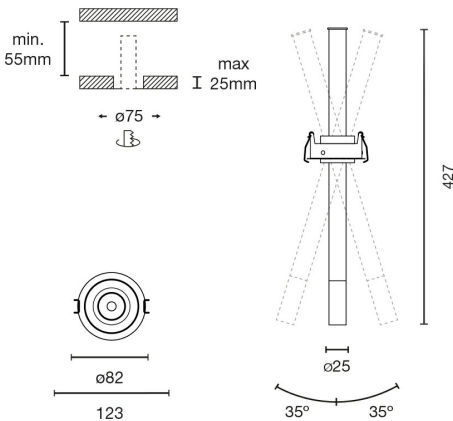

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | TRIAC                 |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

 [Installation instructions](#)

 [Photometric](#)

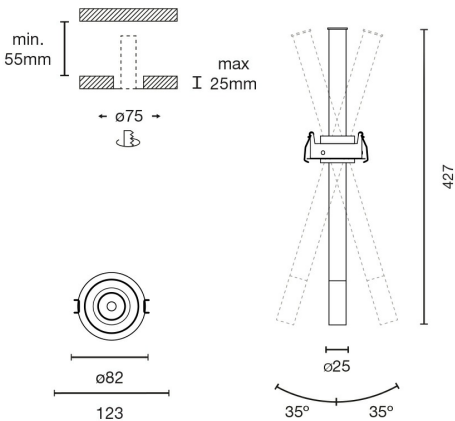

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | DALI                  |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |


Installation instructions

Photometric





CASAMBI

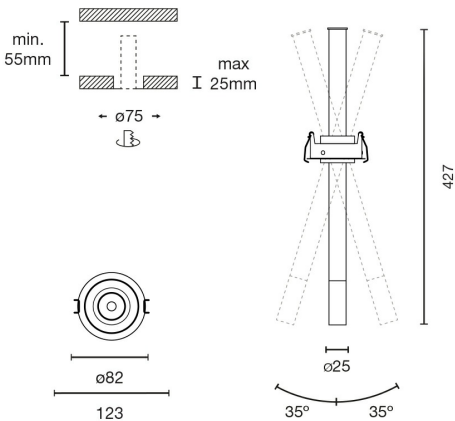


|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | CASAMBI               |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

↓ Installation instructions

↓ Photometric



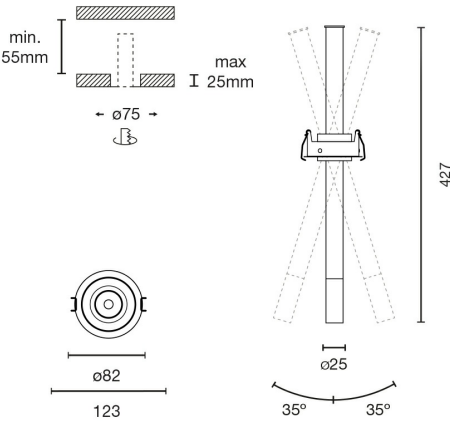

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | No                    |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | On/off                |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

 [Installation instructions](#)


 [Photometric](#)




|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | TRIAC                 |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

Installation instructions

Photometric

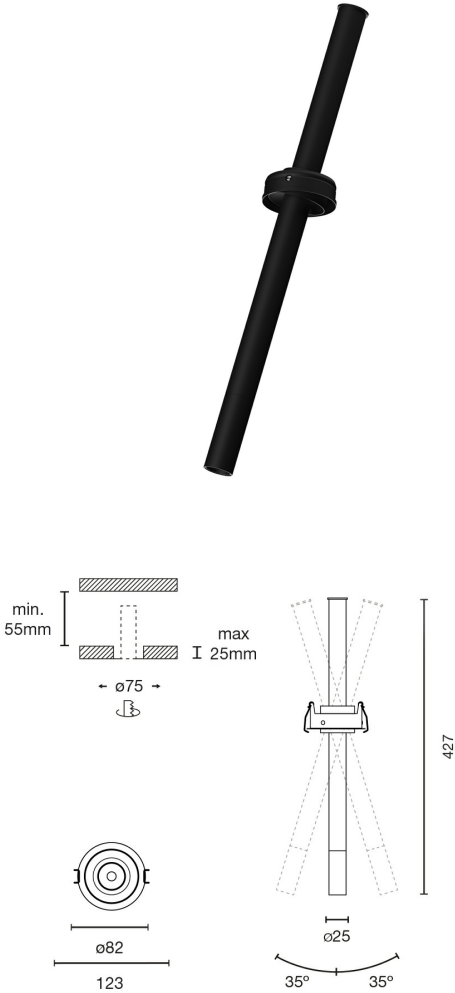

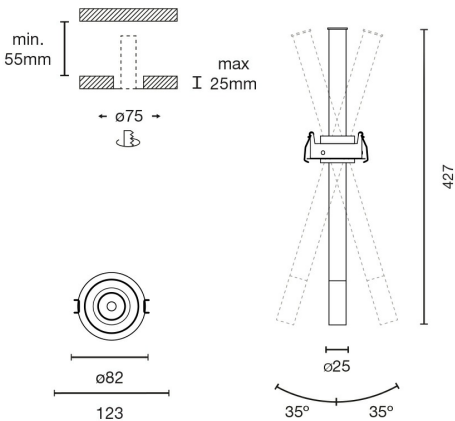

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | DALI                  |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |


Installation instructions

Photometric





CASAMBI

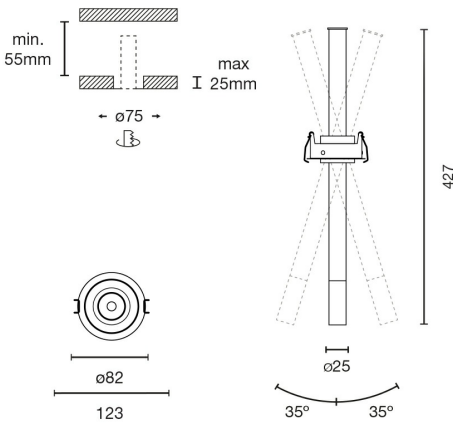


|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 2700K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | CASAMBI               |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

Installation instructions

Photometric




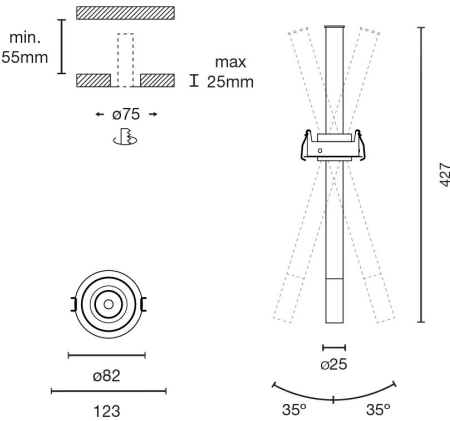

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | No                    |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | On/off                |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

↓ Installation instructions

↓ Photometric


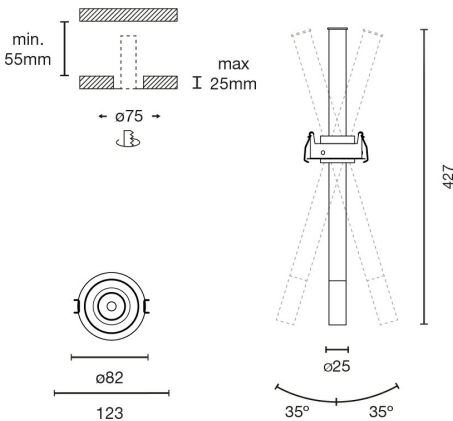


|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | TRIAC                 |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

↓ Installation instructions

↓ Photometric



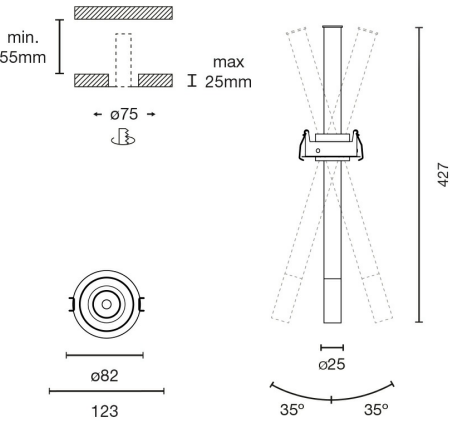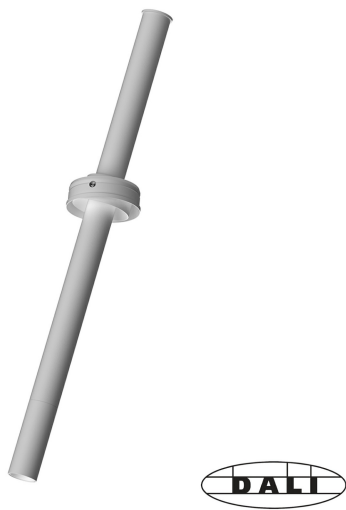

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | DALI                  |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |


Installation instructions

Photometric





CASAMBI

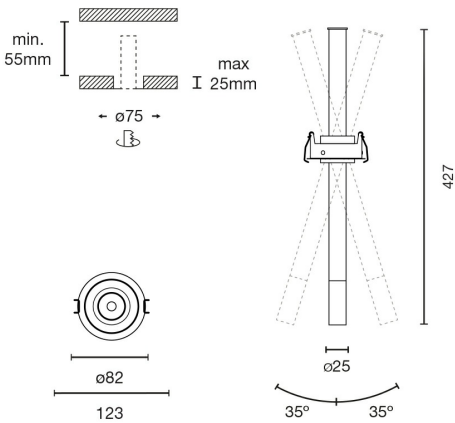


|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | CASAMBI               |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | White+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

Installation instructions

Photometric




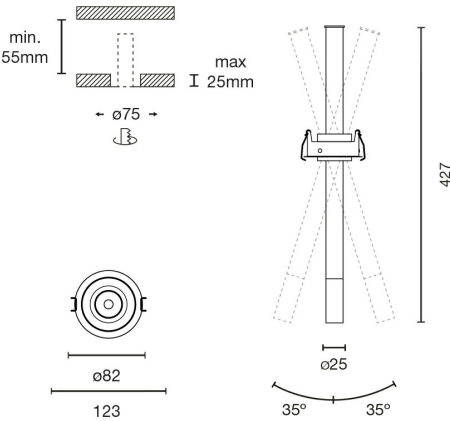

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | No                    |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | On/off                |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

 [Installation instructions](#)

 [Photometric](#)

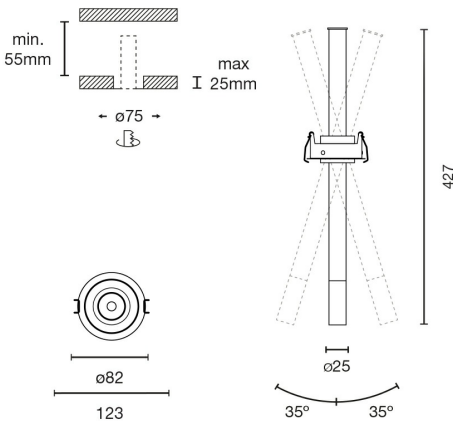


|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | TRIAC                 |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |



Installation instructions



Photometric

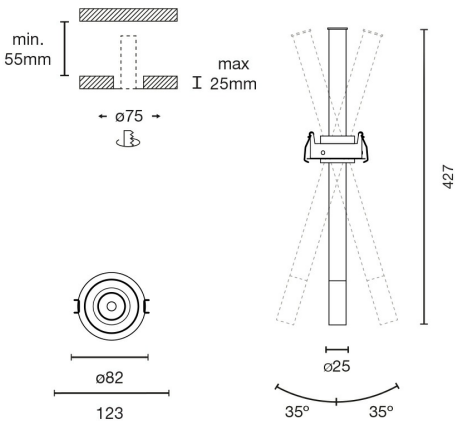

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | DALI                  |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |



Installation instructions




Photometric





CASAMBI

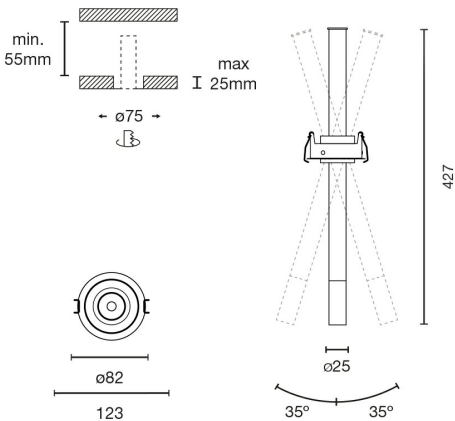

|                                 |                       |
|---------------------------------|-----------------------|
| Mounting                        | Ceiling               |
| Voltage (V)                     | 220V-240V             |
| Hertz                           | 50/60Hz               |
| Class                           | II                    |
| IP                              | 20                    |
| Power (W)                       | 5                     |
| Light source                    | COB LED               |
| Light source included           | Yes                   |
| Incandescent wire               | 650                   |
| Lifespan                        | 50.000h L70 B10       |
| Power factor                    | 0.8                   |
| Color temperature (K)           | 3000K                 |
| Dimmable luminaire (W)          | Yes                   |
| Opening angle degrees           | 15                    |
| Photobiological risk            | 1                     |
| CRI                             | 90                    |
| Control System                  | CASAMBI               |
| Driver included                 | Yes                   |
| Supply current                  | 500 mA                |
| Structure material              | Aluminium + Aluminium |
| Structure finish                | Black+Black           |
| Cut-out Size for Recessed Mount | 75                    |
| Minimum Recessed Height (mm)    | 92                    |
| Maximum Ceiling Thickness (mm)  | 25                    |

Installation instructions

Photometric



